

ETF Series

Tanktop Mounted Return Line Filters
max. 175 l/min - 6 bar



An economic return line filter

Improved system protection

The ETF Series utilizes a re-inforced co-polymer head equipped with 2 return ports and quick-release cover. Maximum pressure 6 bar. Maximum flow 175 l/min. An economic return line filter that has been used and proven in many hydraulic filtration applications.



Contact Information: Product Features:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)
filtrationinfo@parker.com

www.parkerhfde.com

- ETF utilizes a re-inforced co-polymer head equipped with 2 return ports.
- Quick-release cover design.
- Flow from inside to out.
- Maximum pressure 6 bar. Maximum flow 175 l/min.
- An economic return line filter for hydraulic systems.

ETF Series

Tanktop Mounted Return Line Filters

Features & Benefits

Features	Advantages	Benefits
Co-polymer head	Compact profile, lightweight and durable	Less weight, smaller envelope and cleaner appearance
Multiple return line ports	Flexibility related to return line hose(s) arrangement	More compact solutions can be realised
Quick release cover	No tools required to release the filter cover	Easy change of filter element
Optional magnetic pre-filtration	Removes ferro particles, even during bypass conditions	Improved fluid cleanliness levels
In-to-Out filtration	All captured contamination retains inside the element	No recontamination of system during change of elements
Quick response bypass with low hysteresis	Reduction of bypass period due to low hysteresis	Improved protection of system
	Only a small part of the total flow is bypassing the element	
Optional funnel	Ensures that oil enters the tank under the oil level	Significant reduction of oil foaming

Typical Applications

- Lorry mounted cranes
- Agricultural equipment
- Container hook loaders

The Parker Filtration ETF Series Low Pressure Filters

For tank top mounting installation. The ETF Series utilises a reinforced co-polymer head equipped with two return ports and quick release cover. This filter represents an economic solution for hydraulic systems with nominal flows up to 175 l/min.



Specification

Pressure ratings:

Max. 6 bar.

Assembly:

Tank top mounted.

Connections:

Threads G1" + G1" (ISO 228), port B supplied as plugged connection.

Filter housing:

Glass reinforced co-polymer.
Funnel made from steel.

Seal material:

Nitrile.

Operating temperature range:

-20° to +80°C.

Bypass valve:

Opening pressure 1.6 bar.

Filter element:

Conventional style element with steel end caps.

Degree of filtration:

Determined by multipass test according to ISO 16889.

Flow fatigue characteristics:

Filter media is supported so that the optimum fatigue life is achieved.

Filtration media:

Microglass III.

Element collapse rating:

8 bar (ISO 2941).

Indicator options:


Setting 1.0 bar.

Fluid compatibility:

Suitable for use with mineral and vegetable oils, and some synthetic oils. For other fluids, please consult Parker Filtration.

Installation Details


ETF Length	Dimensions mm (inches)	A	B
1	ETF45	82 (3.22)	100 (3.94)
2	ETF60	106 (4.17)	125 (4.92)
3	ETF90	150 (5.90)	177 (6.97)
4	ETF120	200 (7.87)	225 (8.86)
4A	ETF140	260 (10.24)	300 (11.81)
4B	ETF175	350 (13.78)	375 (14.76)

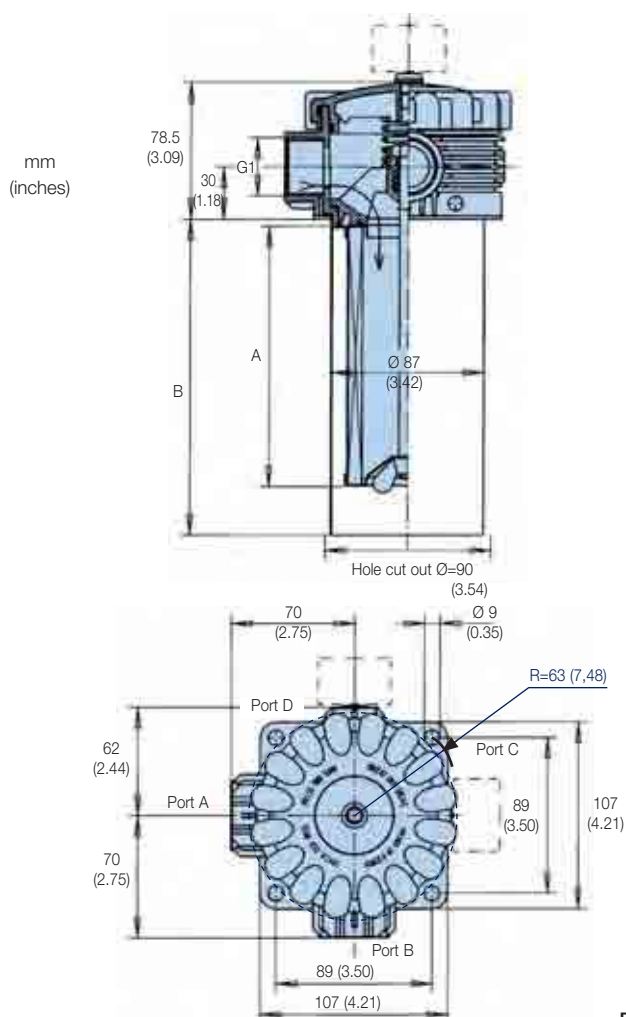

ETF Series

Tanktop Mounted Return Line Filters

Indicator Details

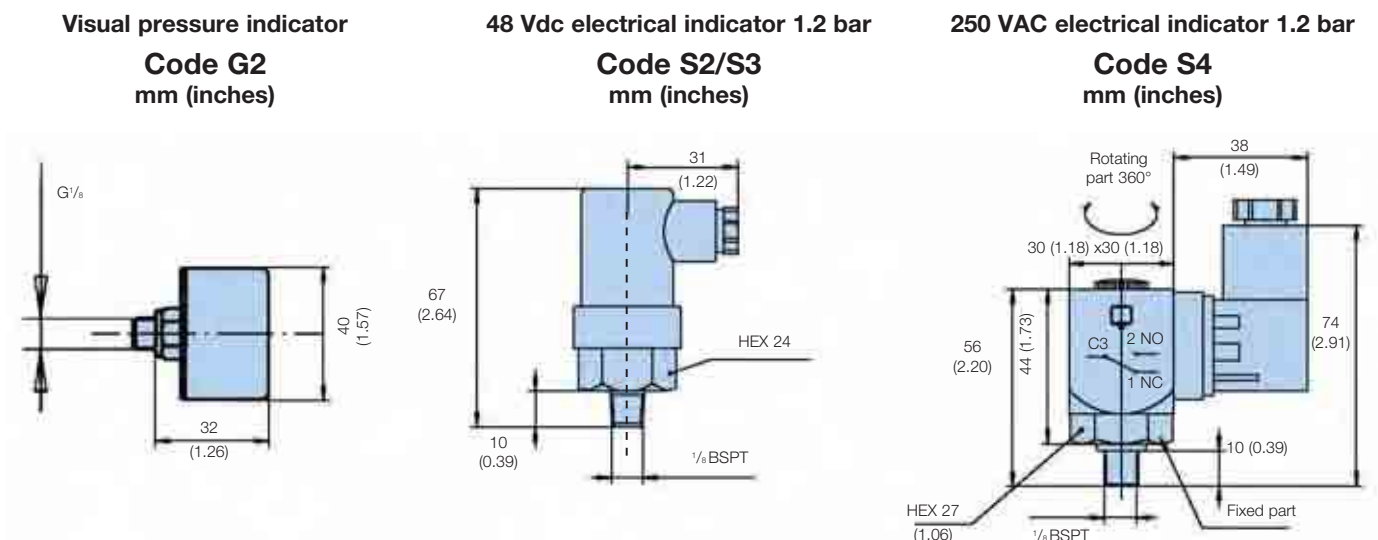

Option	Description	Connection/Voltage	Wiring	Part number						
G2	Visual indicator 1.0 bar	N/A	N/A	FMUG2FBMG02L						
S2/S3	Electrical indicator 1.0 bar	42 Vdc max	 Select <u>either</u> normally open (NO) <u>or</u> normally closed (NC)	FMUS2FBMG02L or FMUS3FBMG02L						
S4	Electrical indicator 1.0 bar	250 VAC max	 <table><tr><td>1</td><td>NC</td></tr><tr><td>2</td><td>NO</td></tr><tr><td>3</td><td>C</td></tr></table>	1	NC	2	NO	3	C	FMUS4FBMG02L
1	NC									
2	NO									
3	C									

Normally open contacts



Normally closed contacts




Pressure Drop Curves

The recommended level of the initial pressure drop for low pressure filters is max 0.5 bar.


If the medium used has a viscosity different from 32cSt, pressure drop over the filter can be estimated as follows:

$$\Delta p = (\Delta p_{32} \times \text{viscosity of medium used}) / 32\text{cSt}$$


ETF45 (Element length code 1)

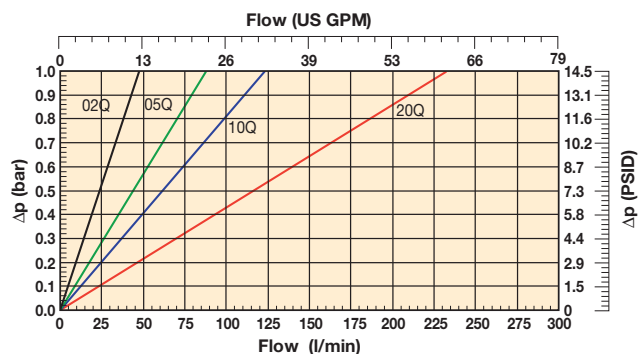


ETF60 (Element length code 2)

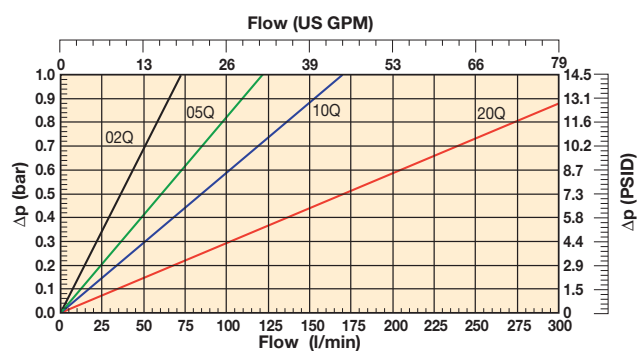


ETF90 (Element length code 3)

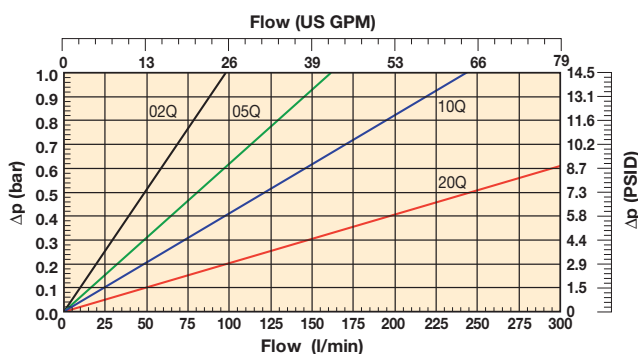


ETF120 (Element length code 4)

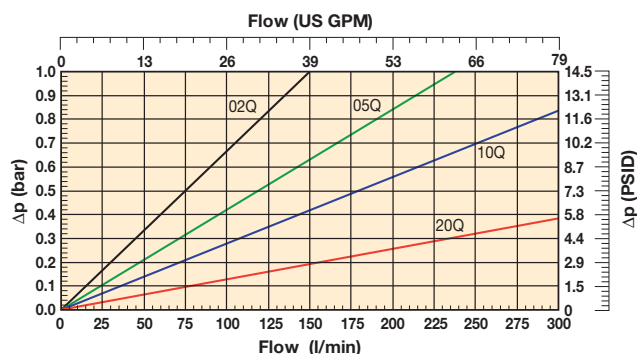

ETF140 (Element length code 4A)

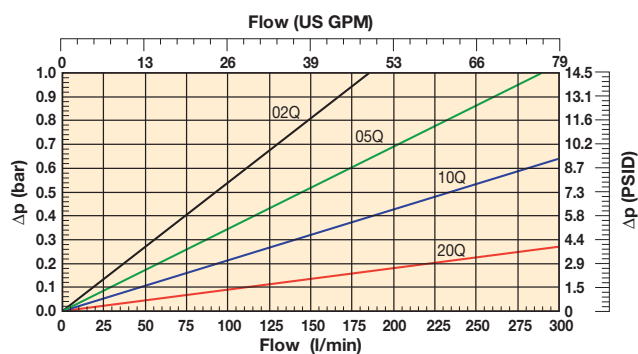

ETF175 (Element length code 4B)

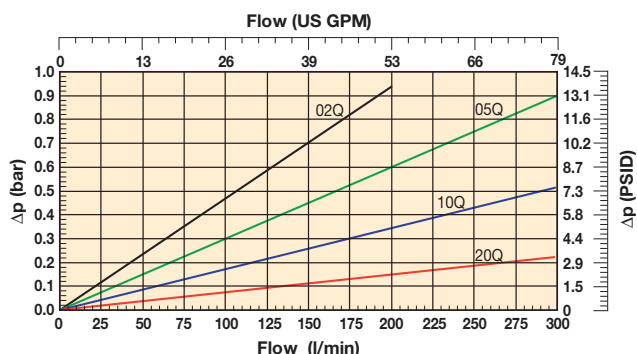

Note: All pressure drop curves above show total pressure drop. i.e. they are combined housing and element curves.

ETF Series

Tanktop Mounted Return Line Filters

Ordering Information

Standard products table

Part number	Supersedes	Flow (l/min)	Model number	Element length	Media rating (μ)	Seals	Indicator	Bypass settings	Ports	Included options	Replacement elements	Supersedes
ETF210QBP2FG164	FK1230.Q010.BK16.GX16	60	ETF60	Length 2	10	Nitrile	Plugged	1.6 Bar (23 Psi)	2xG1 (one port plugged)	Diffuser type P	937950Q	FC1230.Q010.XS
ETF220QBP2FG164	FK1230.Q020.BK16.GX16	60	ETF60	Length 2	20	Nitrile	Plugged	1.6 Bar (23 Psi)	2xG1 (one port plugged)	Diffuser type P	937951Q	FC1230.Q020.XS
ETF310QBP2FG164	FK1240.Q010.BK16.GX16	90	ETF90	Length 3	10	Nitrile	Plugged	1.6 Bar (23 Psi)	2xG1 (one port plugged)	Diffuser type P	937952Q	FC1240.Q010.XS
ETF320QBP2FG164	FK1240.Q020.BK16.GX16	90	ETF90	Length 3	20	Nitrile	Plugged	1.6 Bar (23 Psi)	2xG1 (one port plugged)	Diffuser type P	937953Q	FC1240.Q020.XS

Note: Filter assemblies ordered from the product configurator below are on extended lead times. Where possible, please make your selection from the table above.

Product configurator

Configurator example of an ETF Series filter

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
ETF	3	10Q	B	S2	F	G16	1

Box 1	Box 2	Box 3																																									
<table><tr><th>Code</th></tr><tr><td>ETF</td></tr></table>	Code	ETF	<table><tr><th colspan="2">Filter type</th></tr><tr><td>Housing</td><td>Code</td></tr><tr><td>ETF 1-45</td><td>1</td></tr><tr><td>ETF 1-60</td><td>2</td></tr><tr><td>ETF 1-90</td><td>3</td></tr><tr><td>ETF 1-120</td><td>4</td></tr><tr><td>ETF 1-140</td><td>4A</td></tr><tr><td>ETF 1-175</td><td>4B</td></tr></table>	Filter type		Housing	Code	ETF 1-45	1	ETF 1-60	2	ETF 1-90	3	ETF 1-120	4	ETF 1-140	4A	ETF 1-175	4B	<table><tr><th colspan="5">Degree of filtration</th></tr><tr><td rowspan="3"></td><td colspan="4">Glassfibre media</td></tr><tr><td colspan="4">Microglass III (for disposable elements)</td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td>Disposable element</td><td>02Q</td><td>05Q</td><td>10Q</td><td>20Q</td></tr></table>	Degree of filtration						Glassfibre media				Microglass III (for disposable elements)								Disposable element	02Q	05Q	10Q	20Q
Code																																											
ETF																																											
Filter type																																											
Housing	Code																																										
ETF 1-45	1																																										
ETF 1-60	2																																										
ETF 1-90	3																																										
ETF 1-120	4																																										
ETF 1-140	4A																																										
ETF 1-175	4B																																										
Degree of filtration																																											
	Glassfibre media																																										
	Microglass III (for disposable elements)																																										
Disposable element	02Q	05Q	10Q	20Q																																							

Box 4

Seal type	
Seal material	Code
Nitrile	B

Box 5

Indicator	
	Code
Pressure gauge, setting 1.2 bar, G $\frac{1}{8}$	G2
Pressure switch 42V, 1.2 bar setting, NO with G $\frac{1}{8}$ BSP	S2
Pressure switch 42V, 1.2 bar setting, NC with G $\frac{1}{8}$ BSP	S3
Pressure switch 250V, 1.2 bar setting, NO/NC with G $\frac{1}{8}$	S4
No indicator, indicator ports L + R plugged	P2
Other settings for indicators / gauges on request	on request

Box 6

Bypass valve	
Bypass valve	Code
1.6 bar	F
Other bypass settings	on request

Box 7

Filter connection	
Ports	Code
G1"(BSP) (2 ports, one supplied as plugged connection)	G16

Box 8

Options	
Options	Code
No diffuser required	1
Diffuser type P without perforated plate area	4
Diffuser with integrated hose connection	on request
Magnets	on request
Diffuser type P and magnets	on request
Other combinations	on request

Spare elements table

	02Q	05Q	10Q	20Q
ETF1-45	937969Q	937970Q	937948Q	937949Q
ETF1-60	937971Q	937972Q	937950Q	937951Q
ETF1-90	937973Q	937974Q	937952Q	937953Q
ETF1-120	937975Q	937976Q	937954Q	937955Q
ETF1-140	937977Q	937978Q	937956Q	937957Q
ETF1-175	937979Q	937980Q	937981Q	937982Q

Note: ETF filters are standard supplied without magnets and including diffuser type P

Degree of filtration	Media code
Average filtration beta ratio β (ISO 16889) / particle size μm [c]	
$\beta x(c)=2$ $\beta x(c)=10$ $\beta x(c)=75$ $\beta x(c)=100$ $\beta x(c)=200$ $\beta x(c)=1000$	
% efficiency, based on the above beta ratio (βx)	
50.0% 90.0% 98.7% 99.0% 99.5% 99.9%	
N/A N/A N/A N/A N/A 4.5	02Q
N/A N/A 4.5 5 6 7	05Q
N/A 6 8.5 9 10 12	10Q
6 11 17 18 20 22	20Q

ETF Series Seal Kit	
Part Number	Description
918045037	NITRILE SEAL KIT ETF 0 -4B

Highlights Key (Denotes part number availability)

123	Item is standard
123	Item is standard green option
123	Item is semi standard
123	Item is non standard

Note: Standard items are in stock, semi standard items are available within four weeks

Note 1: Part numbers featured with bold highlighted codes will ensure a 'standard' product selection.

Note 2: Alternate displayed part number selection will require you to contact Parker Filtration for availability.



TTF Series

Tanktop Mounted Return Line Filters

Max 500 l/min - 10 bar



Featuring pre-filtration by means of a magnetic column

Extended element life time

The TTF Series features pre-filtration by means of a magnet column and a quick response bypass with low hysteresis. Maximum pressure 10 bar. Maximum flow 500 l/min. A second return port is an available option as is a filling port in the filter cover.

AN INNOVATIVE GREEN
FILTER FEATURING
LEIF®



Contact Information: Product Features:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)
filtrationinfo@parker.com

www.parkerhfde.com

- TTF features pre-filtration by means of a magnet column.
- Quick response bypass with low hysteresis.
- Maximum pressure 10 bar. Maximum flow 500 l/min.
- Options include a filling port in the filter cover and second return port.
- Patented LEIF® elements safeguard filtration quality.
- Flow from inside to out.

TTF Series

Tanktop Mounted Return Line Filters

Features & Benefits

Features	Advantages	Benefits
10 bar rated filter	Can be utilised for severe return line applications	Reduced downtime due to premature filter failures
Cast aluminium head	Compact profile, lightweight and durable	Less weight, smaller envelop and cleaner appearance
LEIF® elements	Patented element safeguards the use of genuine parts	Guaranteed quality of filtration Contributes to ISO 14001 certification
Magnetic pre-filtration	Removes ferrous particles, even during bypass conditions	Improved fluid cleanliness levels Extended element life time
In-to-Out filtration	All captured contamination retains inside the element	No recontamination of system during change of elements
High level of customisation	Dedicated system-matched solutions can be easily made available	Improved integration of filter in system combined with lower initial system costs
Quick response bypass with low hysteresis	Reduction of bypass period due to low hysteresis	Improved protection of system
	Only a small part of the total flow is bypassing the element	
Standard or customised funnel	Ensures that oil enters the tank under the oil level	Significant reduction of oil foaming

Typical Applications

- Waste management trucks
- Mobile cranes
- Power packs
- Wheeled loaders
- Drilling equipment

The Parker Filtration TTF Series Return Line Filters

TTF tank top mounted return line filters feature pre-filtration by means of a magnet column and a quick response bypass with low hysteresis. Thanks to the “In-to-Out” filter principle, contaminated oil cannot leak back into the system. TTF filters are available in versions capable of handling flow rates up to 500 l/min. They can operate up to a maximum working pressure of 10 bar. Optional filling port in filter cover, second return port and customised diffusers can be specified.



Specification

Operation pressure:

Max. 10 bar.

Assembly:

Tank top mounted.

Connections:

Threaded BSP ports.
Flanged ports on request.

Filter housing:

Aluminium head and cover.

Seal material:

Nitrile, fluoroelastomer, neoprene.

Operation temperature range:

Seal material Nitrile: -40 to +100°C.
Seal material Fluoroelastomer: -20 to +120°C.

Bypass setting

Opening pressure 0.8 / 1.5 or 2 bar.
Other settings on request.

Degree of filtration:

Determined by multipass test according to ISO 16889.

Flow fatigue characteristics:

Filter media is supported so that the optimum fatigue life is achieved.

Filtration media:

Microglass III and Ecoglass III for LEIF® elements.
Also available 10µm cellulose and 40µm stainless steel mesh.

Element collapse rating:

10 bar (ISO 2941)

Pressure indicator options:

Setting 0.7 or 1.2 bar.
Other settings on request.
Visual pressure gauge.
Electrical pressure switch.

Options:

Diffuser type P (straight pipe, no perforated plate area)
Diffuser type T (with closed diffuser end cap and with perforated plate area, recommended when oil entry in reservoir is close to the reservoir bottom or to ensure oil entry under the reservoir oil level)

Magnetic pack:

Standard. TTF400 and 500 are standard supplied without magnets

Filling port in cover: (optional)

Plugged.

Filter element:

LEIF® element with reusable metal element sleeve.

Optional conventional style element with steel end caps.


The LEIF® element is patented and safeguards the use of genuine parts.

Note: LEIF® element can be used with mineral and HEES type oils.

For other fluids consult Parker Filtration.

LEIF® contributes to ISO 14001 quality standards.

TTF

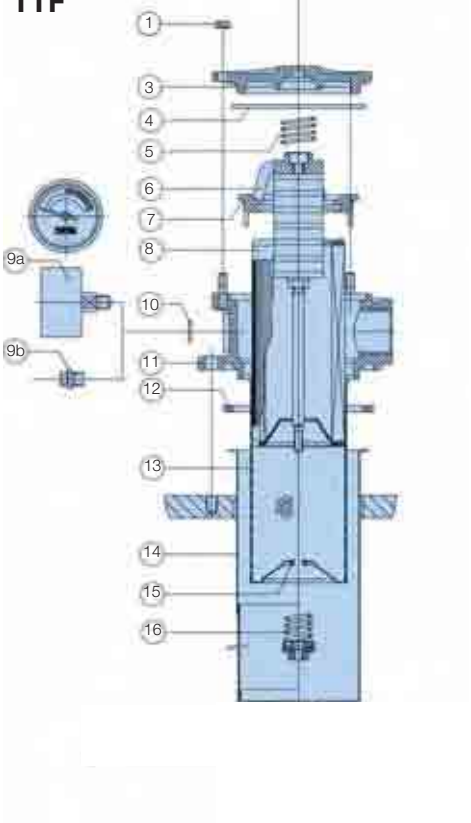



TTF sealkit: No. 4+7+12

Ref.	No.	Description
1	4	Flange nut
3	1	Cover
4	1	Cover-seal
5	1	Top-spring
6	1	Insert
7	1	Insert-seal
8	1	Element
9a	0-1	Indicator
9b	0-3	Plug M10x1
10	0-3	Unit-ring
11	1	Housing
12	1	Gasket
13	1	Sleeve
14	1	Funnel/diffuser
15	1	O-ring
16	1	Bypass set

TTF Series

Tanktop Mounted Return Line Filters



TTF Lengths 2-5 Single port

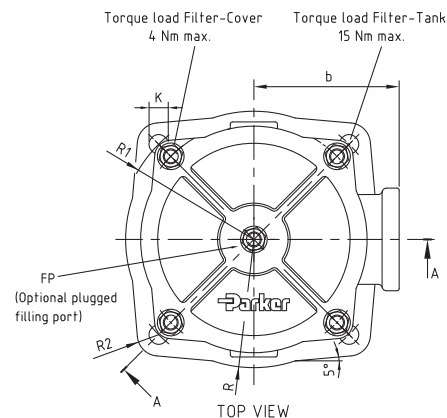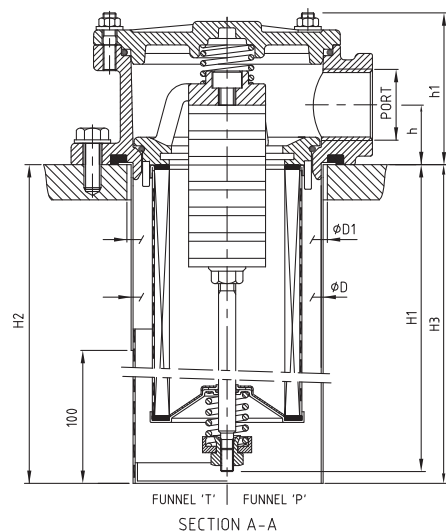

TTF length	Type	Port option	h	h1	ØD	ØD1	H1	H2	H3	b	R	R1	R2	K	FP
2	TTF 1-60	G ³ / ₄ , G1	28	73	Ø90	Ø93	131	190	190	68	60	63	10	4xØ9	G ¹ / ₂
3	TTF 1-90						175	190	190						
4	TTF 1-120						225	330	330						
5	TTF 1-150						325	330	330						

Dimensions in mm

TTF Lengths 6-10 Single port

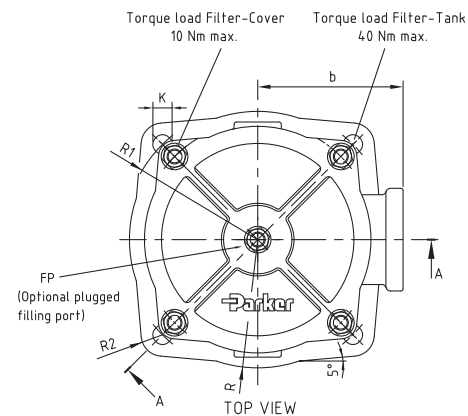
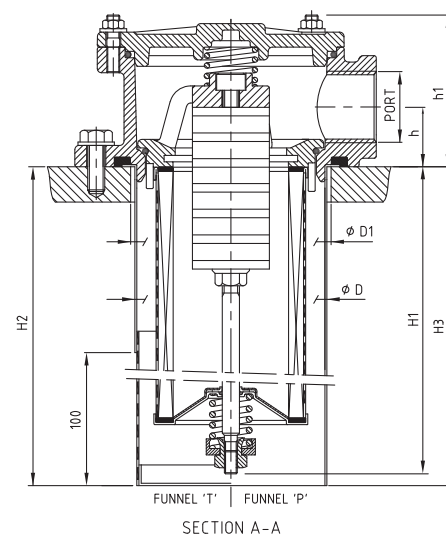


TTF length	Type	Port option	h	h1	ØD	ØD1	H1	H2	H3	b	R	R1	R2	K	FP
6	TTF 2-170	G1 ¹ / ₄ , G1 ¹ / ₂	36	92	Ø132	Ø136	223	318	318	90	83	87.5	12	4xØ11	G1
7	TTF 2-230						303	318	318						
8	TTF 2-300						508	538	538						
9	TTF 2-400						523	538	538						
10	TTF 2-500						563	578	578						

Dimensions in mm





TTF Lengths 2-5 Dual port

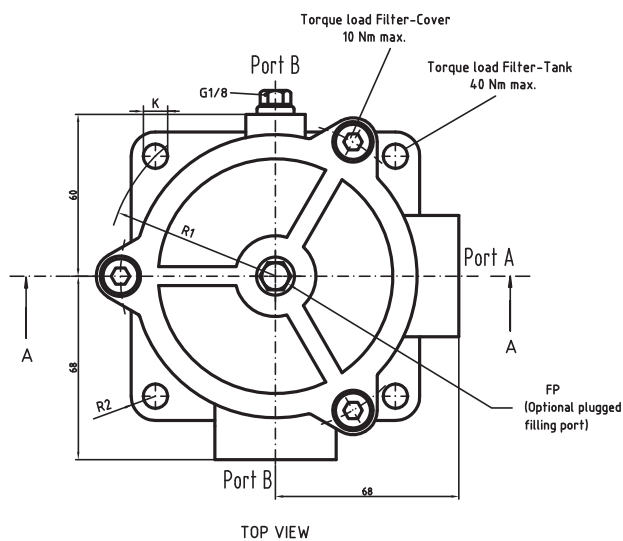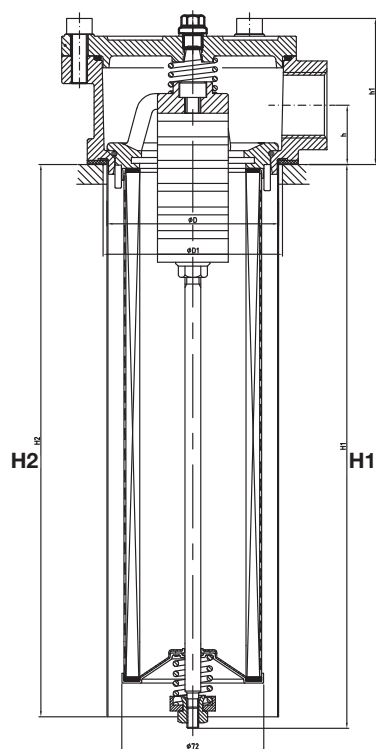

TTF length	Type	Port option A - B	h	h1	ØD	ØD1	H1	H2	b	R	R1	R2	K	FP
2	TTF 1-60	G1 - G1	30	74	Ø88	Ø91	131	190	90	83	87.5	12	4xØ11	G1
3	TTF 1-90						175	170						
4	TTF 1-120						225	220						
4A	TTF 1-140						285	280						
5	TTF 1-150						325	320						
4B	TTF 1-175						376	370						

Dimensions in mm

TTF Lengths 6-10 Dual port

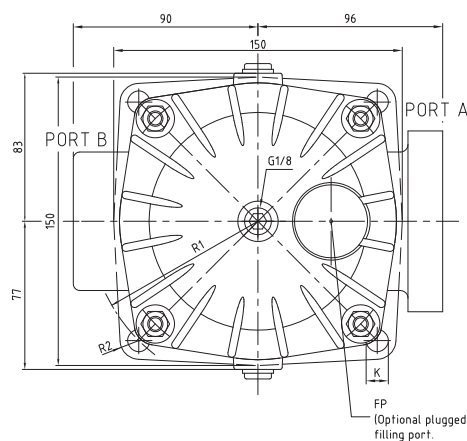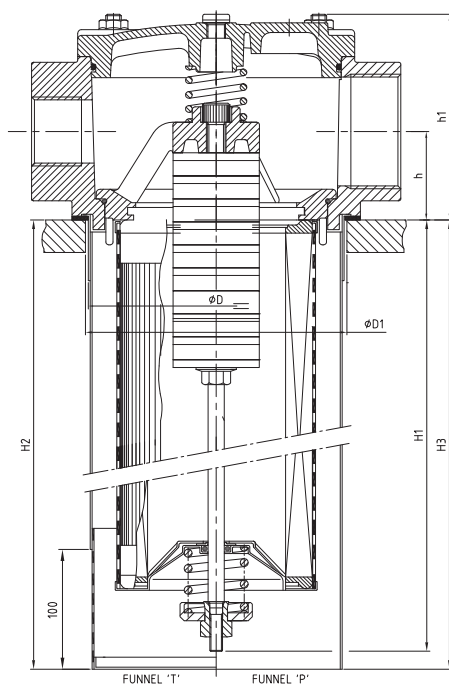

TTF length	Type	Dual Port option A-B	h	h1	ØD	ØD1	H1	H2	H3	R	R1	R2	K	FP
6	TTF 2-170	G1½ - G1½ G2 - G1½ SAE 1½ - G1½	46	107	Ø132	Ø136	223	318	318	83	87.5	12	4xØ11	G1
7	TTF 2-230						303	318	318					
8	TTF 2-300						508	538	538					
9**	TTF 2-400						523	538	538					
10**	TTF 2-500						563	578	578					

Dimensions in mm

TTF Series

Tanktop Mounted Return Line Filters


Pressure Drop Curves

The recommended level of the initial pressure drop for low pressure filters is max 0.5 bar.


If the medium used has a viscosity different from 32cSt, pressure drop over the filter can be estimated as follows:

$$\Delta p = (\Delta p_{32} \times \text{viscosity of medium used}) / 32\text{cSt.}$$


TTF60 (Element length code 2)

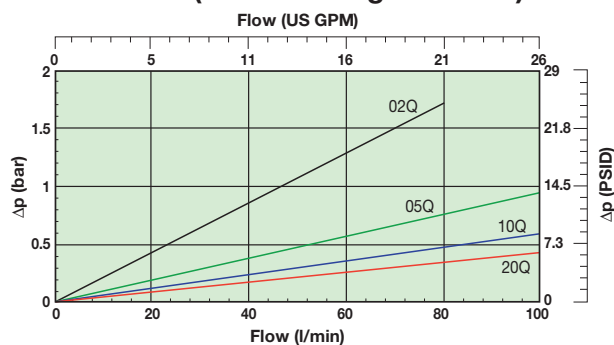


TTF90 (Element length code 3)

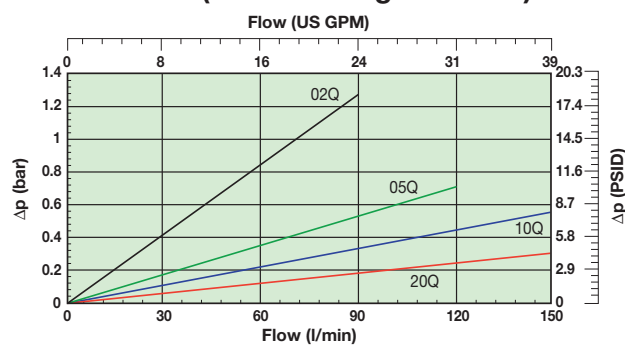

TTF120 (Element length code 4)

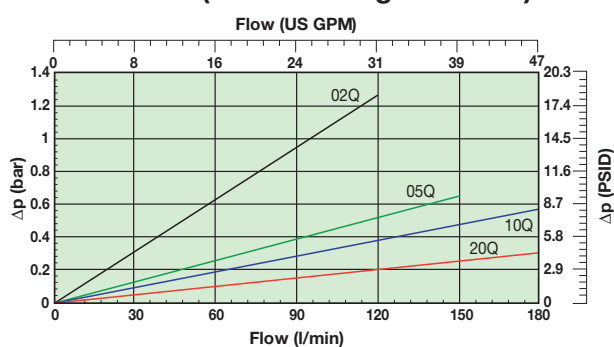

TTF150 (Element length code 5)

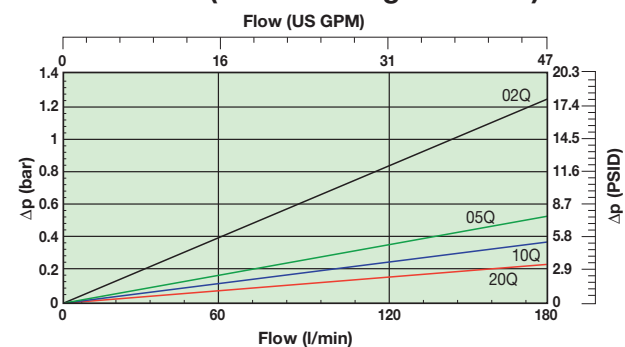


Pressure Drop Curves (cont.)

The recommended level of the initial pressure drop for low pressure filters is max 0.5 bar.


If the medium used has a viscosity different from 32cSt, pressure drop over the filter can be estimated as follows:

$$\Delta p = (\Delta p_{32} \times \text{viscosity of medium used}) / 32\text{cSt.}$$


TTF170 (Element length code 6)

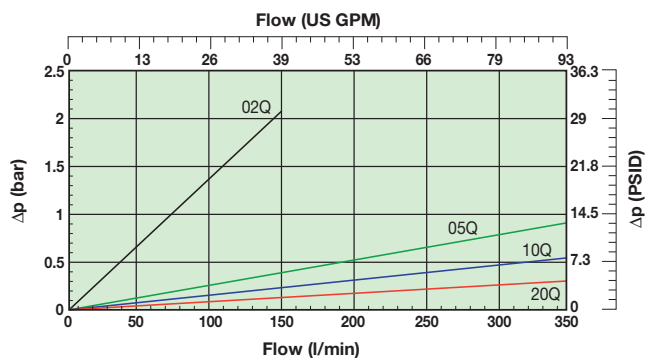


TTF230 (Element length code 7)

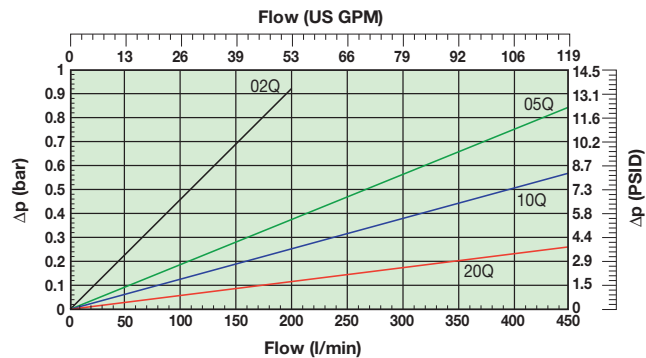


TTF300 (Element length code 8)

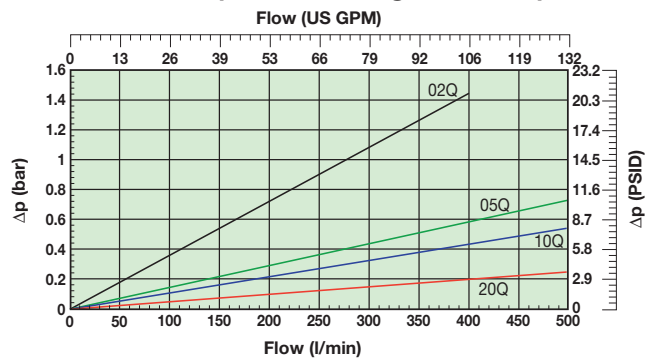

TTF400 (Element length code 9)

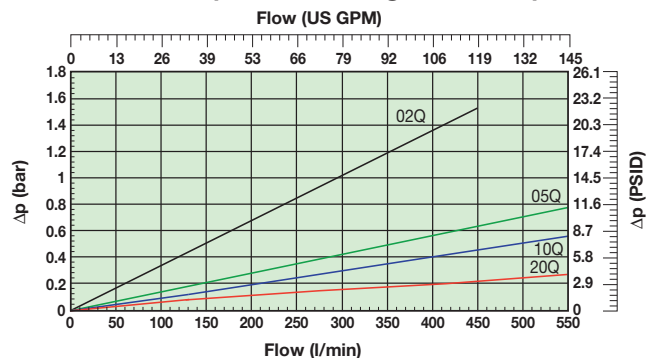

TTF500 (Element length code 10)

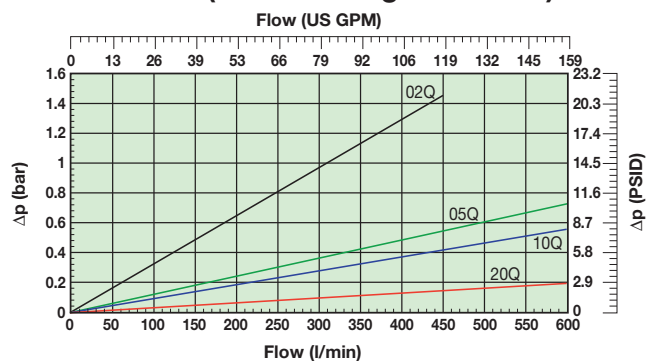


TTF Series


Tanktop Mounted Return Line Filters

Pressure Drop Curves (cont.)


TTF60 (Element length code 2)
Cellulose & stainless steel media

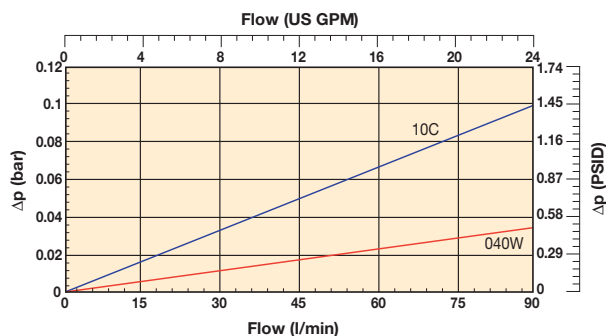


TTF90 (Element length code 3)
Cellulose & stainless steel media

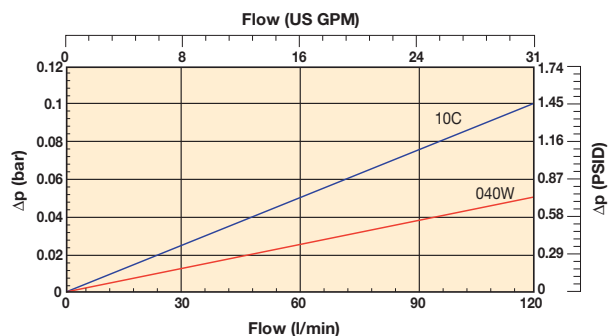


TTF120 (Element length code 4)
Cellulose & stainless steel media

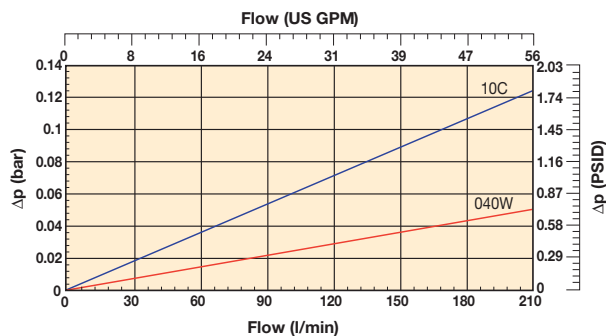


TTF150 (Element length code 5)
Cellulose & stainless steel media

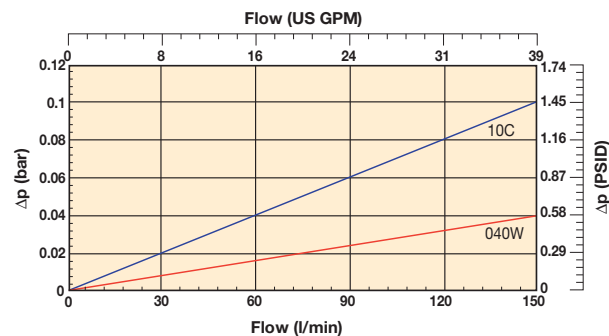


TTF170 (Element length code 6)
Cellulose & stainless steel media

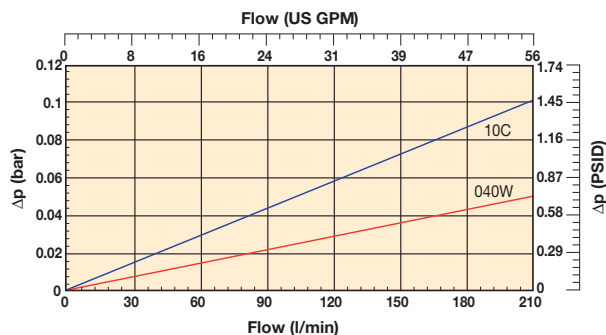

TTF230 (Element length code 7)
Cellulose & stainless steel media

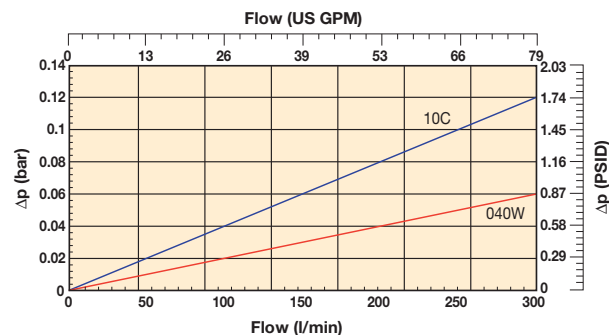

TTF300 (Element length code 8)
Cellulose & stainless steel media

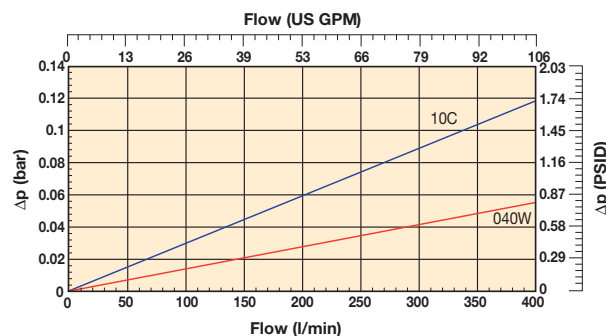


TTF Series

Tanktop Mounted Return Line Filters


Indicator Options

Indicator PS pressure switch

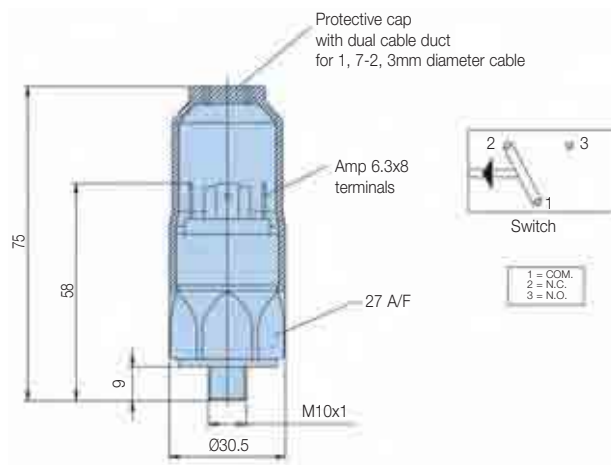


Specifications	
Elec.rating	42V / 4A
Thread connection	M10x1
Elec.connection	AMP 6.3x0.8 terminals + protective cap
Protection	IP65 (with cap) terminals IP00
Code	FMUS1EBMM10L (Switch)

Indicator PS NO/NC pressure switch

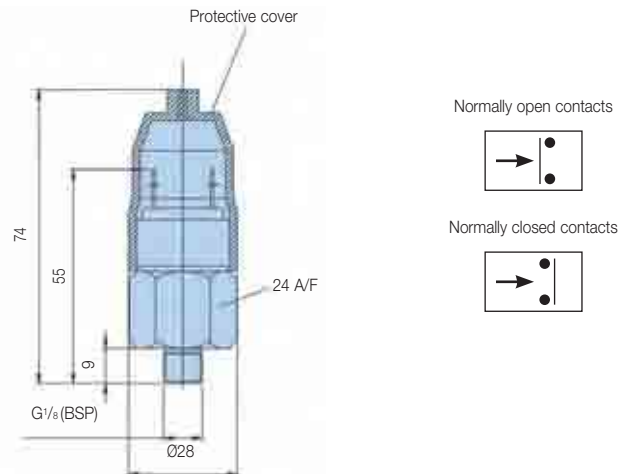


Specifications	
Elec.rating	42V / 2A
Thread connection	G1/8
Elec.connection	AMP terminal 6.3x0.8
Protection	IP65 (terminal IP00)
Switch type	NO or NC
Code	FMUS2EBMG02L (NO switch) FMUS3EBMG02L (NC switch)

Normally open contacts



Normally closed contacts



Indicator Connection / Filter Head Matrix

Port(s) Filter head	Indicator Thread
TTF ISO 228-G1/4" (BSP) (TTF length 2,3,4 and 5)	M10
ISO 228-G1" (BSP)	M10
ISO 228-G1 1/2" (BSP) (TTF length 6 and larger)	M10
2xISO 228-G1 1/4" (BSP) (TTF length 6 and larger)	G1/8"
ISO 228-G1 1/2" (BSP) (TTF length 6 and larger)	M10
2xISO 228-G1 1/2" (BSP) (TTF length 6 and larger)	G1/8"
1 1/2" SAE-3000 PSI (TTF length 6 and larger)	G1/8"
1 1/2" SAE-3000 PSI (2nd port) + G1 1/2" (TTF length 6 and larger)	G1/8"
G2" (TTF length 6 and larger)	G1/8"
G2" + G1 1/2" (TTF length 6 and larger)	G1/8"

Visual indicator	
M10: code	FMUG1EBPM10L
G1/8: code	FMUG2EBPG02L

Ordering Information

Standard products table

Part number	Supersedes	Flow (l/min)	Model number	Element length	Media rating (µ)	Seals	Indicator	Bypass settings	Ports	Included options	Replacement elements	Supersedes
TTF310QLBP2EG121	TTF90-G1/4 TXWL3-10 B15 MM	90	TTF90	Length 3	10	Nitrile	Plugged	1.5 Bar (22 Psi)	G1/4	None	937878Q	TXWL3-10
TTF320QLBP2EG121	TTF90-G1/4 TXWL3-20 B15 MM	90	TTF90	Length 3	20	Nitrile	Plugged	1.5 Bar (22 Psi)	G1/4	None	937877Q	TXWL3-20
TTF510QLBP2EG161	TTF125-G1 TXWL3E-10 B15 MM	125	TTF125	Length 5	10	Nitrile	Plugged	1.5 Bar (22 Psi)	G1	None	937852Q	TXWL3E-10
TTF520QLBP2EG161	TTF125-G1 TXWL3E-20 B15 MM	125	TTF125	Length 5	20	Nitrile	Plugged	1.5 Bar (22 Psi)	G1	None	937875Q	TXWL3E-20
TTF610QLBP2EG203	TTF170-G1 1/4 TXWL4-10 T B15 MM	170	TTF170	Length 6	10	Nitrile	Plugged	1.5 Bar (22 Psi)	G1 1/4	Diffuser type T	937853Q	TXWL4-10
TTF620QLBP2EG203	TTF170-G1 1/4 TXWL4-20 T B15 MM	170	TTF170	Length 6	20	Nitrile	Plugged	1.5 Bar (22 Psi)	G1 1/4	Diffuser type T	937874Q	TXWL4-20
TTF810QLBP2EG243	TTF300-G1 1/2 TXWL5A-10 T B15 MM	300	TTF300	Length 8	10	Nitrile	Plugged	1.5 Bar (22 Psi)	G1 1/2	Diffuser type T	937855Q	TXWL5A-10
TTF820QLBP2EG243	TTF300-G1 1/2 TXWL5A-20 T B15 MM	300	TTF300	Length 8	20	Nitrile	Plugged	1.5 Bar (22 Psi)	G1 1/2	Diffuser type T	937872Q	TXWL5A-20
TTF1010QLBP2HG24A	TTF500-G1 1/2 TXWL5C-10 T B20 MM NMG	500	TTF500	Length 10	10	Nitrile	Plugged	2.0 Bar (29 Psi)	G1 1/2	Diffuser type T	937857Q	TXWL5C-10
TTF1010QLBP2HG24A	TTF500-G1 1/2 TXWL5C-20 T B20 MM NMG	500	TTF500	Length 10	20	Nitrile	Plugged	2.0 Bar (29 Psi)	G1 1/2	Diffuser type T	937870Q	TXWL5C-20

Note: Filter assemblies ordered from the product configurator on the next page are on extended lead times. Where possible, please make your selection from the table above.

TTF Series

Tanktop Mounted Return Line Filters

Ordering Information (cont.)

Product configurator

Configurator example of a TTF Series filter

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
TTF	9	05QL	V	S3	H	L24	1

Box 1	Box 2	Box 3
Code	Filter type	Degree of filtration
TTF	Housing	Element media
	Code	Glass fibre
	TTF 1-60	Microglass III (for disposable elements)
	TTF 1-90	Cellulose
	TTF 1-120	Nom. rating
	TTF 1-120	Disposable element
	TTF 1-120	LEIF® element
	TTF 1-150	
	TTF 2-170	
	TTF 2-230	
	TTF 2-300	
	TTF 2-400	
	TTF 2-500	

Box 4	Box 5	Box 6
Seal type	Indicator	Bypass valve
Seal material		Bypass valve
Code	Code	Code
Nitrile	Pressure gauge, setting 1.2 bar, M10x1*	0.8 bar
Fluorelastomer	Pressure gauge, setting 1.2 bar, G1/8 for dual head ports	1.5 bar
Neoprene	Pressure switch 42V, 1.2 bar setting, NO/NC, M10x1*	2.0 bar for TTF series
	Pressure switch 42V, 1.2 bar setting, NO with G1/8 BSP*	Blocked bypass
	Pressure switch 42V, 1.2 bar setting, NC with G1/8 BSP*	Other bypass settings
	Pressure switch 250V, NO/NC with G1/8*	
	Pressure switch 220V, NO/NC with M10*	
	No indicator, indicator ports not machined	
	No indicator, indicator ports L + R plugged	
	Other settings for indicators / gauges on request	

Note: * HEAD HAS PLUGGED INDICATOR CONNECTIONS L+R

Note: Also see the table indicator Connection/Filter Head Matrix on page 29

Box 7	Box 8
Filter connection	Options
Ports	Options
ISO 228-G1/4" (BSP) (TTF length 2,3,4 and 5)	No diffuser required
ISO 228-G1" (BSP) (TTF length 2,3,4 and 5)	Diffuser type T with perforated plate area
ISO 228-G1 1/2" (BSP) (TTF length 6 and larger)	Diffuser type P without perforated plate area
2xISO 228-G1 1/4" (BSP) (TTF length 6 and larger)	Diffuser with integrated hose connection for TTF lengths 2, 3 and 4
ISO 228-G1 1/2" (BSP) (TTF length 6 and larger)	No magnets
2xISO 228-G1 1/2" (BSP) (TTF length 6 and larger)	Plugged filling port
1 1/2" SAE-3000 PSI (TTF length 6 and larger)	Diffuser type T and no magnets
1 1/2" SAE-3000 PSI (2nd port) + G1 1/2" (TTF length 6 and larger)	Diffuser type P and no magnets
G2" (TTF length 6 and larger)	Diffuser type T, no magnets, plugged filling port
G2" + G1 1/2" (TTF length 6 and larger)	Diffuser type P, no magnets, plugged filling port
	Air tight diffuser type T
	Air tight diffuser type P
	Other combinations

Degree of filtration						Media code
Average filtration beta ratio β (ISO 16889) / particle size μm [c]						
$\beta(x)=2$	$\beta(x)=10$	$\beta(x)=75$	$\beta(x)=100$	$\beta(x)=200$	$\beta(x)=1000$	
% efficiency, based on the above beta ratio (β_x)						
50.0%	90.0%	98.7%	99.0%	99.5%	99.9%	
N/A	N/A	N/A	N/A	N/A	4.5	
N/A	N/A	4.5	5	6	7	02Q/02QL
N/A	N/A	4.5	5	6	7	05Q/05QL
N/A	6	8.5	9	10	12	10Q/10QL
6	11	17	18	20	22	20Q/20QL

Highlights Key (Denotes part number availability)

123	Item is standard
123	Item is standard green option
123	Item is semi standard
123	Item is non standard

Note: Standard items are in stock, semi standard items are available within four weeks



Parker Hannifin
Hydraulic Filter Division Europe
FDHB500UK.

Ordering Information (cont.)

Supersedes Spare Element table (TXWL & PXWL replaced by 900000 number)

TTF60	TXWL2-2	TXWL2-5	TXWL2-10	TXWL2-20
Part number spare element	937823Q	937880Q	937881Q	937882Q
TTF90	TXWL3-2	TXWL3-5	TXWL3-10	TXWL3-20
Part number spare element	937824Q	937879Q	937878Q	937877Q
TTF120	TXWL3D-2	TXWL3D-5	TXWL3D-10	TXWL3D-20
Part number spare element	937825Q	937825Q	937851Q	937876Q
TTF125	TXWL3E-2	TXWL3E-5	TXWL3E-10	TXWL3E-20
Part number spare element	937826Q	937849Q	937852Q	937875Q
TTF170	TXWL4-2	TXWL4-5	TXWL4-10	TXWL4-20
Part number spare element	937827Q	937848Q	937853Q	937874Q
TTF230	TXWL5-2	TXWL5-5	TXWL5-10	TXWL5-20
Part number spare element	937828Q	937847Q	937854Q	937873Q
TTF300	TXWL5A-2	TXWL5A-5	TXWL5A-10	TXWL5A-20
Part number spare element	937829Q	937846Q	937855Q	937872Q
TTF400	TXWL5B-2	TXWL5B-5	TXWL5B-10	TXWL5B-20
Part number spare element	937830Q	937845Q	937856Q	937871Q
TTF500	TXWL5C-2	TXWL5C-5	TXWL5C-10	TXWL5C-20
Part number spare element	937831Q	937844Q	937857Q	937870Q

Supersedes Spare Element table (TXW & TXX replaced by 900000 number)

TTF60	TXW2-10-B	TXW2-2-B	TXW2-5-B	TXW2-10-B	TXW2-20-B	ST2-40-B
Part number spare element	937721	937751Q	937754Q	937787Q	937790Q	937820
TTF90	TXW3-10-B	TXW3-2-B	TXW3-5-B	TXW3-10-B	TXW3-20-B	ST3-40-B
Part number spare element	937722	937750Q	937755Q	937786Q	937791Q	937819
TTF120	TXW3D-10-B	TXW3D-2-B	TXW3D-5-B	TXW3D-10-B	TXW3D-20-B	ST3D-40-B
Part number spare element	937723	937749Q	937756Q	937785Q	937792Q	937818
TTF125	TXW3E-10-B	TXW3E-2-B	TXW3E-5-B	TXW3E-10-B	TXW3E-20-B	ST3E-40-B
Part number spare element	937724	937748Q	937757Q	937784Q	937793Q	937817
TTF170	TXW4-10-B	TXW4-2-B	TXW4-5-B	TXW4-10-B	TXW4-20-B	ST4-40-B
Part number spare element	937725	937747Q	937758Q	937783Q	937794Q	937816
TTF230	TXW5-10-B	TXW5-2-B	TXW5-5-B	TXW5-10-B	TXW5-20-B	ST5-40-B
Part number spare element	937726	937746Q	937759Q	937782Q	937795Q	937815
TTF300	TXW5A-10-B	TXW5A-2-B	TXW5A-5-B	TXW5A-10-B	TXW5A-20-B	ST5A-40-B
Part number spare element	937727	937745Q	937760Q	937781Q	937796Q	937814

TTF Series Seal Kit

TTF Filter connections	Nitrile Seal Kit
Ports	Part Number
ISO 228-G $\frac{1}{4}$ " (BSP) (TTF length 2,3,4 and 5)	2049010012
ISO 228-G $\frac{1}{2}$ " (BSP) (TTF length 2,3,4 and 5)	2049010012
ISO 228-G $\frac{1}{4}$ " (BSP) (TTF length 6 and larger)	2049010012
2xISO 228-G $\frac{1}{4}$ " (BSP) (TTF length 6 and larger)	918045035
ISO 228-G $\frac{1}{2}$ " (BSP) (TTF length 6 and larger)	2049010013
2xISO 228-G $\frac{1}{2}$ " (BSP) (TTF length 6 and larger)	918045035
1 $\frac{1}{2}$ " SAE-3000 PSI (TTF length 6 and larger)	918045035
1 $\frac{1}{2}$ " SAE-3000 PSI (2nd port) + G $\frac{1}{2}$ " (TTF length 6 and larger)	918045035
G2" (TTF length 6 and larger)	918045035
G2" + G $\frac{1}{2}$ " (TTF length 6 and larger)	918045035

Notes

[illegible]

STF Series

Return Line Filters

Max. 500 l/min - 10 bar



When safety is a must

Where the use of aluminium is restricted in applications such as marine and industrial, the STF return line filter series provides an ideal solution to hydraulic system designers and specifiers.



Contact Information: Product Features:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
**(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)**
filtrationinfo@parker.com

www.parkerhfde.com

- 'In-to-out' filtration design means contaminated oil cannot leak back into the system
- magnetic pre-filtration
- Cast iron filter head assembly
- multiple port configuration
- flows up to 500 L/min
- 10 bar maximum working pressure
- optional airtight diffusers
- *LEIF*® low environmental impact filter elements as standard

STF Series

Return Line Filters

Features & Benefits


Features	Advantages	Benefits
10 bar rated filter	Can be utilised for severe return line applications	Reduced downtime due to premature filter failures
Cast iron head	Robust design	Convenient and effective solution for applications where aluminium is not allowed
LEIF® elements	Patented element safeguards the use of genuine parts	Guaranteed quality of filtration Contributes to ISO 14001 certification
Magnetic pre-filtration	Removes ferrous particles, even during bypass conditions	Improved fluid cleanliness levels Extended element life time
In-to-Out filtration	All captured contamination retains inside the element	No recontamination of system during change of elements
High level of customisation	Dedicated system-matched solutions can be easily made available	Improved integration of filter in system combined with lower initial system costs
Quick response bypass with low hysteresis	Reduction of bypass period due to low hysteresis Only a small part of the total flow is bypassing the element	Improved protection of system
Standard or customised funnel	Ensures that oil enters the tank under the oil level	Significant reduction of oil foaming

Typical Applications

- Marine power pack
- Steel mills
- Mining equipment
- Drilling equipment

The Parker Filtration STF Series Return Line Filters

STF Tank top mounted return filters feature pre-filtration by means of a magnet column and a bypass with low hysteresis. Thanks to the “In-to-Out” filtration principle, contaminated oil cannot leak back into the system. The STF filter has a casted iron filter head assembly, making it ideal for marine and industrial applications where the use of aluminium is restricted. The filter head with multiple ports, capable of handling flow up to 500 l/min at 10 bar working pressure, represents an easy and effective way of integrating return line filtration with power packs. Optional airtight diffusers are standard to avoid air ingress in the return line.

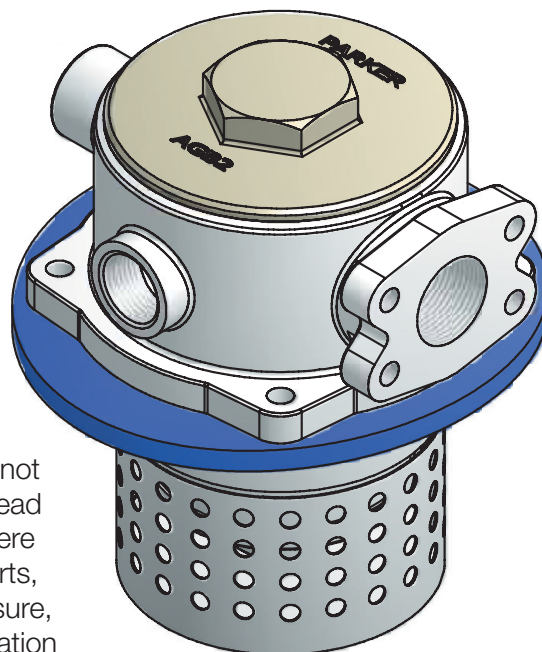

Specification

Operation pressure:

Max. 10 bar

Assembly

Tank top mounted

Connections

SAE flange

Threaded BSP ports

Filter housing and cover

Cast Iron (GGG40)

Seal material:

Nitrile, Fluorelastomer

Operating temperature:

Seal material Nitrile: -40°C to +100°C

Seal material Fluorelastomer: -20°C to +120°C

Bypass setting

Opening pressure 0,8 / 1,5 / 2,0 bar

Degree of filtration

Determined by multipass test in accordance to ISO16889

Flow fatigue characteristics

Filter media is supported so that the optimum fatigue life is achieved

Filtration media

Microglass III and Ecoglass III for *LEIF*® elements

Also available 10 µm cellulose and 40 µm stainless steel mesh

Element collapse pressure

10 bar (ISO 2941)

Pressure indicator options

Setting 0,7 and 1,2 bar

Visual pressure gauge

Electrical pressure switch

Options

Diffuser type P (straight pipe, no perforated plate area)

Diffuser type T (with closed diffuser end cap and with perforated plate area, recommended when oil entry in the reservoir is close to the bottom or to ensure oil enters the reservoir under the oil level)

Magnetic pack

Standard, only not included for STF 400 and 500

Filter element

LEIF® element with reusable metal element sleeve

Optional conventional style element with steel end caps




The *LEIF*® element is patented and safeguards the use of genuine parts.

Note:

LEIF® element can be used with mineral and HEES type oils


For other fluids consult Parker Filtration

LEIF® element contributes to ISO14001 quality standards

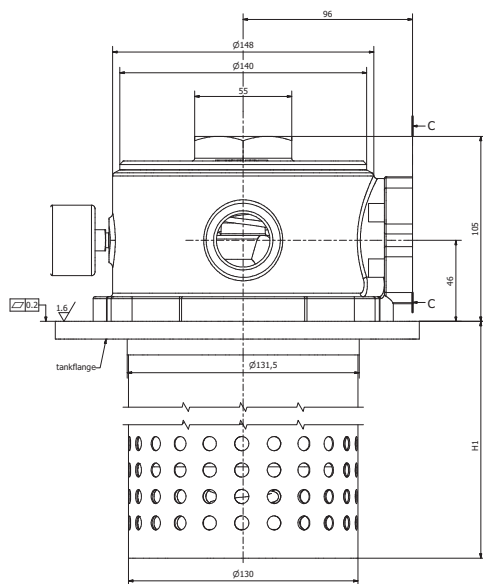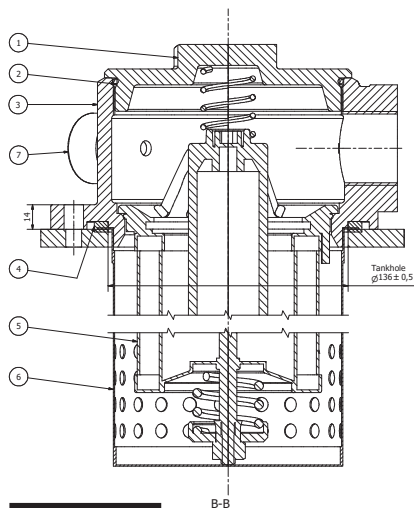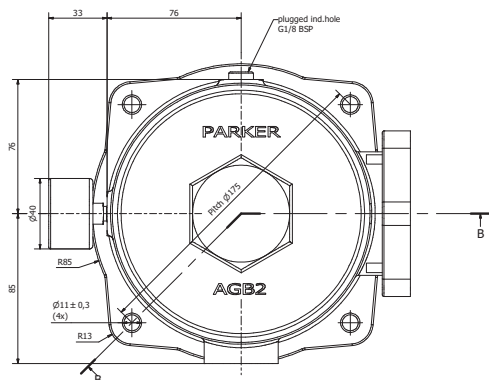

STF Without Diffuser		
STF Length	Type	H1
6	STF170	223
7	STF230	303
8	STF300	508
9	STF400	523
10	STF500	563

STF With Diffuser		
STF Length	Type	H1
6	STF170	305
7	STF230	305
8	STF300	510
9	STF400	525
10	STF500	575

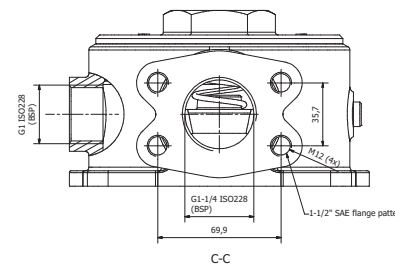

STF Series

Return Line Filters


Pressure Drop Curves

The recommended level of the initial pressure drop for low pressure filters is max 0.5 bar.


If the medium used has a viscosity different from 32cSt, pressure drop over the filter can be estimated as follows:

$$\Delta p = (\Delta p_{32} \times \text{viscosity of medium used}) / 32\text{cSt}.$$


STF170 (Element length code 6)

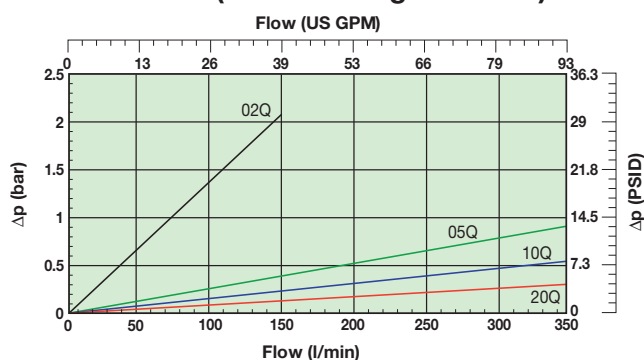


STF230 (Element length code 7)

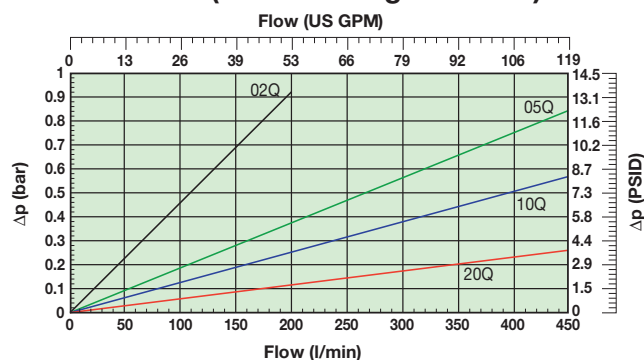


STF300 (Element length code 8)

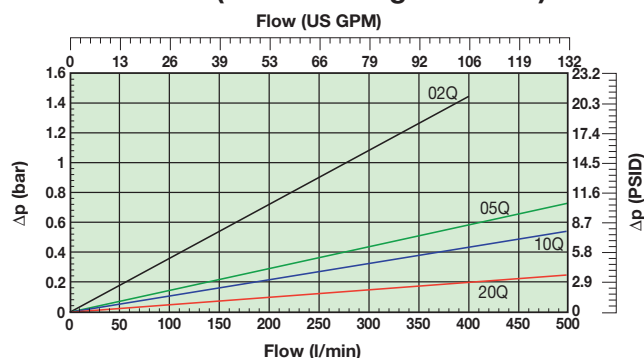


STF400 (Element length code 9)

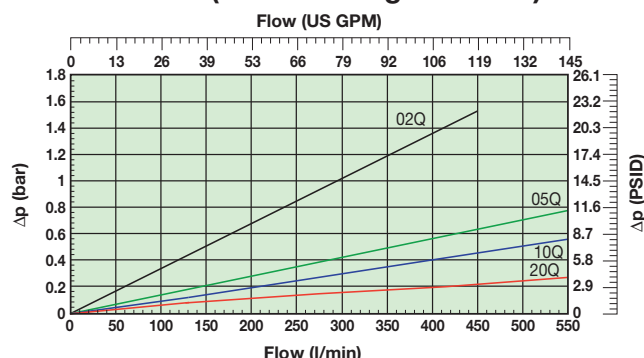


STF500 (Element length code 10)

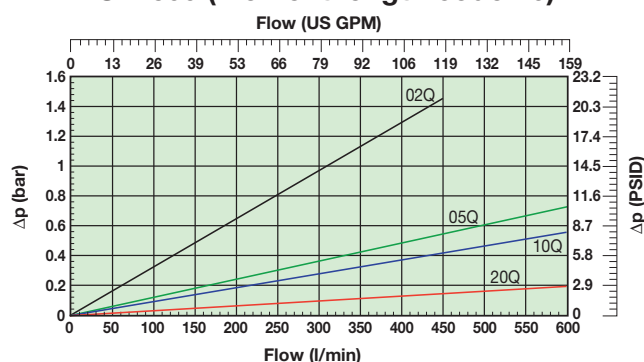


**STF170 (Element length code 6)
Cellulose & stainless steel media**

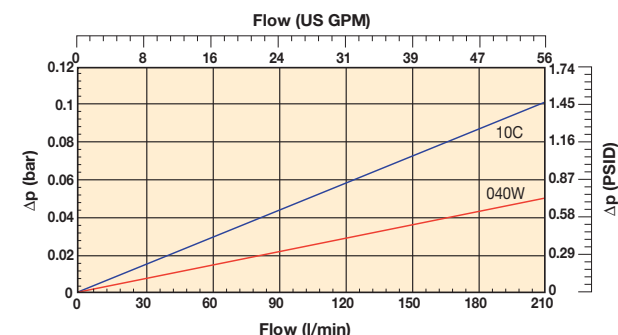

**STF230 (Element length code 7)
Cellulose & stainless steel media**

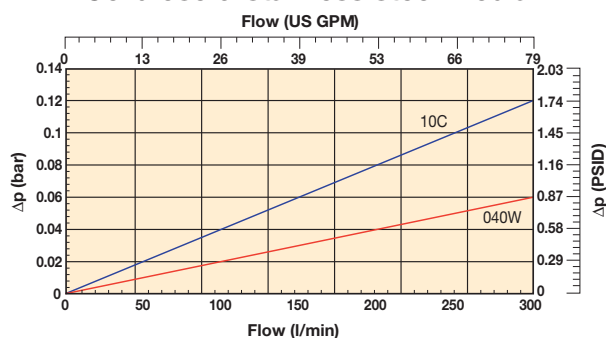


**STF300 (Element length code 8)
Cellulose & stainless steel media**

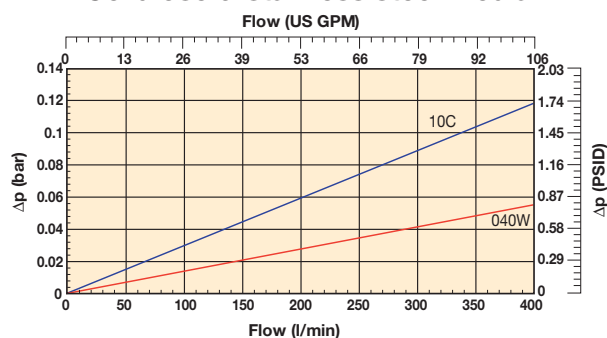


STF Series

Return Line Filters


Indicator PS NO/NC pressure switch

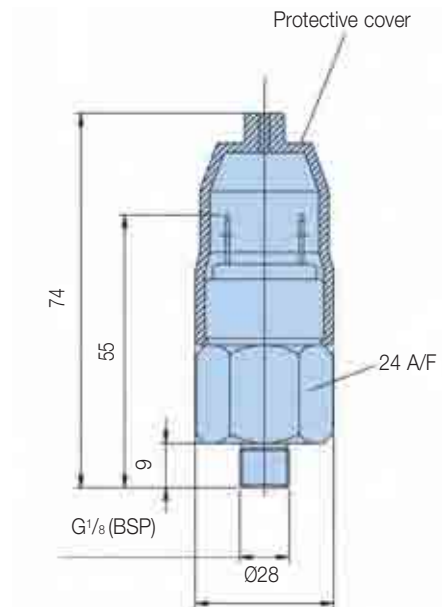

Normally open contacts



Normally closed contacts



Specifications	
Electrical rating	42V / 2A
Thread connection	G1/8"
Electrical connection	AMP terminal 6.3x0.8
Protection	IP65 (terminal IP00)
Switch type	NO or NC
Indicator setting	1.2 bar (0.7 bar on request)
Code	FMUS2EBMG02L (NO type switch)
	FMUS3EBMG02L (NC type switch)

Visual indicator	Code
1.2 bar	FMUG2EBPG02L

LEIF Spare Element table				
	2 micron	5 micron	10 micron	20 micron
STF170 Part number spare element	937827Q	937848Q	937853Q	937874Q
STF230 Part number spare element	937828Q	937847Q	937854Q	937873Q
STF300 Part number spare element	937829Q	937846Q	937855Q	937872Q
STF400 Part number spare element	937830Q	937845Q	937856Q	937871Q
STF500 Part number spare element	937831Q	937844Q	937857Q	937870Q

Conventional Spare Element table Microglass III Media						
	10 micron cellulose	2µ Microglass III	5µ Microglass III	10µ Microglass III	20µ Microglass III	40 micron stainless steel mesh
TTF170 Part number spare element	937725	937747Q	937758Q	937783Q	937794Q	937816
TTF230 Part number spare element	937726	937746Q	937759Q	937782Q	937795Q	937815
TTF300 Part number spare element	937727	937745Q	937760Q	937781Q	937796Q	937814

Ordering Information

Standard products table										
Part Number	Flow (l/min)	Model Number	Element Length	Media Rating (u)	Seals	Indicator	Bypass Setting	Ports	Included Options	Replacement Elements
STF810QLBP2ELC24G	300	STF300	8	10	Nitrile	Plugged	1.5 Bar	11/2"SAE-flange	Airtight funnel typeT	937855Q
STF820QLBP2ELC24G	300	STF300	8	20	Nitrile	Plugged	1.5 Bar	11/2"SAE-flange	Airtight funnel typeT	937872Q
STF1010QLBP2ELC24G	500	STF500	10	10	Nitrile	Plugged	1.5 Bar	11/2"SAE-flange	Airtight funnel typeT	937857Q
STF1020QLBP2ELC24G	500	STF500	10	20	Nitrile	Plugged	1.5 Bar	11/2"SAE-flange	Airtight funnel typeT	937870Q

Product configurator

Configurator example of a STF Series filter

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
STF	8	05QL	B	S2	E	LC24	G

Box 1	Box 2	Box 3																																																																		
<table><tr><th>Code</th></tr><tr><td>STF</td></tr></table>	Code	STF	<table><tr><th colspan="2">Filter type</th></tr><tr><th>Housing</th><th>Code</th></tr><tr><td>STF 2-170</td><td>6</td></tr><tr><td>STF 2-230</td><td>7</td></tr><tr><td>STF 2-300</td><td>8</td></tr><tr><td>STF 2-400</td><td>9</td></tr><tr><td>STF 2-500</td><td>10</td></tr></table>	Filter type		Housing	Code	STF 2-170	6	STF 2-230	7	STF 2-300	8	STF 2-400	9	STF 2-500	10	<table><tr><th colspan="7">Degree of filtration</th></tr><tr><th rowspan="4">Element media</th><th>Nominal</th><th colspan="4">Filtration fineness absolute</th><th rowspan="4">Stainless steel mesh</th></tr><tr><th>Cellulose</th><th colspan="4">LEIF®</th></tr><tr><th></th><th colspan="4">Q3 glassfibre βx(c) >200</th></tr><tr><th>10µm</th><th>Q02 (2micron)</th><th>Q05 (5micron)</th><th>Q010 (10micron)</th><th>Q020 (20micron)</th></tr><tr><td></td><th>10C</th><th>02Q</th><th>05Q</th><th>10Q</th><th>20Q</th><th>40µm</th></tr><tr><td>Disposable element</td><td></td><td></td><td></td><td></td><td></td><th>040W</th></tr><tr><td>LEIF® element</td><td></td><td>02QL</td><td>05QL</td><td>10QL</td><td>20QL</td><td></td></tr></table>	Degree of filtration							Element media	Nominal	Filtration fineness absolute				Stainless steel mesh	Cellulose	LEIF®					Q3 glassfibre βx(c) >200				10µm	Q02 (2micron)	Q05 (5micron)	Q010 (10micron)	Q020 (20micron)		10C	02Q	05Q	10Q	20Q	40µm	Disposable element						040W	LEIF® element		02QL	05QL	10QL	20QL	
Code																																																																				
STF																																																																				
Filter type																																																																				
Housing	Code																																																																			
STF 2-170	6																																																																			
STF 2-230	7																																																																			
STF 2-300	8																																																																			
STF 2-400	9																																																																			
STF 2-500	10																																																																			
Degree of filtration																																																																				
Element media	Nominal	Filtration fineness absolute				Stainless steel mesh																																																														
	Cellulose	LEIF®																																																																		
		Q3 glassfibre βx(c) >200																																																																		
	10µm	Q02 (2micron)	Q05 (5micron)	Q010 (10micron)	Q020 (20micron)																																																															
	10C	02Q	05Q	10Q	20Q	40µm																																																														
Disposable element						040W																																																														
LEIF® element		02QL	05QL	10QL	20QL																																																															

Box 4	Box 5	Box 6																																						
<table><tr><th colspan="2">Seal type</th></tr><tr><th>Seal material</th><th>Code</th></tr><tr><td>Nitrile</td><td>B</td></tr><tr><td>Fluorelastomer</td><td>V</td></tr></table>	Seal type		Seal material	Code	Nitrile	B	Fluorelastomer	V	<table><tr><th colspan="2">Indicator</th></tr><tr><th></th><th>Code</th></tr><tr><td>Pressure gauge , setting 1.2 bar, G1/8</td><td>G2</td></tr><tr><td>Pressure switch 42V, 1.2 bar setting, NO with G1/8 BSP</td><td>S2</td></tr><tr><td>Pressure switch 42V, 1.2 bar setting, NC with G1/8 BSP</td><td>S3</td></tr><tr><td>Pressure switch 250V, NO/NC with G1/8</td><td>S4</td></tr><tr><td>No indicator, indicator ports L + R plugged</td><td>P2</td></tr><tr><td>Other settings for indicators / gauges on request</td><td>on request</td></tr></table>	Indicator			Code	Pressure gauge , setting 1.2 bar, G1/8	G2	Pressure switch 42V, 1.2 bar setting, NO with G1/8 BSP	S2	Pressure switch 42V, 1.2 bar setting, NC with G1/8 BSP	S3	Pressure switch 250V, NO/NC with G1/8	S4	No indicator, indicator ports L + R plugged	P2	Other settings for indicators / gauges on request	on request	<table><tr><th colspan="2">Bypass valve</th></tr><tr><th>Bypass valve</th><th>Code</th></tr><tr><td>0.8 bar</td><td>B</td></tr><tr><td>1.5 bar</td><td>E</td></tr><tr><td>2.0 bar for STF series</td><td>H</td></tr><tr><td>Blocked bypass</td><td>X</td></tr><tr><td>Other bypass settings</td><td>on request</td></tr></table>	Bypass valve		Bypass valve	Code	0.8 bar	B	1.5 bar	E	2.0 bar for STF series	H	Blocked bypass	X	Other bypass settings	on request
Seal type																																								
Seal material	Code																																							
Nitrile	B																																							
Fluorelastomer	V																																							
Indicator																																								
	Code																																							
Pressure gauge , setting 1.2 bar, G1/8	G2																																							
Pressure switch 42V, 1.2 bar setting, NO with G1/8 BSP	S2																																							
Pressure switch 42V, 1.2 bar setting, NC with G1/8 BSP	S3																																							
Pressure switch 250V, NO/NC with G1/8	S4																																							
No indicator, indicator ports L + R plugged	P2																																							
Other settings for indicators / gauges on request	on request																																							
Bypass valve																																								
Bypass valve	Code																																							
0.8 bar	B																																							
1.5 bar	E																																							
2.0 bar for STF series	H																																							
Blocked bypass	X																																							
Other bypass settings	on request																																							

Box 7	Box 8																				
Filter connection	Options																				
<table> <tr> <th>Ports</th><th>Code</th></tr> <tr> <td>1 1/2" SAE-3000 PSI + G1" (2nd port)</td><td>LC24</td></tr> <tr> <td>G1 1/4" + G1" (2nd port)</td><td>GL24</td></tr> </table>	Ports	Code	1 1/2" SAE-3000 PSI + G1" (2nd port)	LC24	G1 1/4" + G1" (2nd port)	GL24	<table> <tr> <th>Options</th><th>Code</th></tr> <tr> <td>No diffuser required</td><td>1</td></tr> <tr> <td>Diffuser type T with perforated plate area</td><td>3</td></tr> <tr> <td>Diffuser type P without perforated plate area</td><td>4</td></tr> <tr> <td>Airtight diffuser type T with perforated plate area</td><td>G</td></tr> <tr> <td>Airtight diffuser type P without perforated plate area</td><td>H</td></tr> <tr> <td>Other combinations</td><td>on request</td></tr> </table>	Options	Code	No diffuser required	1	Diffuser type T with perforated plate area	3	Diffuser type P without perforated plate area	4	Airtight diffuser type T with perforated plate area	G	Airtight diffuser type P without perforated plate area	H	Other combinations	on request
Ports	Code																				
1 1/2" SAE-3000 PSI + G1" (2nd port)	LC24																				
G1 1/4" + G1" (2nd port)	GL24																				
Options	Code																				
No diffuser required	1																				
Diffuser type T with perforated plate area	3																				
Diffuser type P without perforated plate area	4																				
Airtight diffuser type T with perforated plate area	G																				
Airtight diffuser type P without perforated plate area	H																				
Other combinations	on request																				

Note: STFsize 2-400 and 2-500 are standard supplied without magnets

Degree of filtration						Media code
Average filtration beta ratio β (ISO 16889) / particle size μm [c]						
βx(c)=2	βx(c)=10	βx(c)=75	βx(c)=100	βx(c)=200	βx(c)=1000	
% efficiency, based on the above beta ratio (βx)						
50.0%	90.0%	98.7%	99.0%	99.5%	99.9%	
N/A	N/A	N/A	N/A	N/A	4.5	
N/A	N/A	4.5	5	6	7	02Q/02QL
N/A	N/A	4.5	5	6	7	05Q/05QL
N/A	6	8.5	9	10	12	10Q/10QL
6	11	17	18	20	22	20Q/20QL

Highlights Key (Denotes part number availability)

123	Item is standard
123	Item is standard green option
123	Item is semi standard
123	Item is non standard

Note: Standard items are in stock, semi standard items are available within four weeks

BGT Series

Tanktop Mounted Return Line Filters

Max. 2400 l/min - 10 bar



Patented LEIF® elements safeguard filtration quality

When high flow performance is needed

The BGT Series features pre-filtration by means of a magnet column and a full flow bypass with low hysteresis. Maximum pressure 10 bar. Maximum flow 2400 l/min. LEIF® elements available up to 1500 l/min. Designed for a wide range of mobile and industrial applications



Contact Information:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)
filtrationinfo@parker.com

www.parkerhfde.com

Product Features:

- BGT features pre-filtration by means of a magnet column.
- Filter heads with multiple ports available.
- Flow from inside to out.
- Full flow bypass with low hysteresis.
- Maximum pressure 10 bar. Maximum flow 2400 l/min.
- Patented LEIF® elements safeguard filtration quality.

BGT Series

Tanktop Mounted Return Line Filters

Features & Benefits

Features	Advantages	Benefits
10 bar rated filter	Can be utilised for severe return line applications	Reduced downtime due to premature filter failures
Cast aluminium head	Compact profile, lightweight and durable	Less weight, smaller envelop and cleaner appearance
LEIF® elements	Patented element safeguards the use of genuine parts	Guaranteed quality of filtration Contributes to ISO 14001 certification
Magnetic pre-filtration	Removes ferrous particles, even during bypass conditions	Improved fluid cleanliness levels Extended element life time
In-to-Out filtration	All captured contamination retains inside the element	No recontamination of system during change of elements
High level of customisation	Dedicated system-matched solutions can be easily made available	Improved integration of filter in system combined with lower initial system costs
Quick response bypass with low hysteresis	Reduction of bypass period due to low hysteresis	Improved protection of system
	Only a small part of the total flow is bypassing the element	
Standard or customised funnel	Ensures that oil enters the tank under the oil level	Significant reduction of oil foaming

Typical Applications

- Mobile cranes
- Excavators
- Deck cranes
- Fire fighting equipment
- Hydraulic presses
- Waste balers
- Industrial power units
- Fork lift trucks

The Parker Filtration BGT Series Tank Mounted Return Line Filters.

BGT tanktop mounted return line filters feature pre-filtration by means of a magnet column and a quick response bypass with low hysteresis. Thanks to the 'In-to-Out' filter principle, contaminated oil cannot leak back into the system. BGT Filters are available in versions capable of handling flow rates up to 2400 l/min. They can operate with a maximum working pressure of 10 bar. LEIF® elements are available for environment-friendly filtration for versions up to 1500 l/min.



Specification

Operating pressure:

Max. 10 bar.

Assembly:

Tank top mounted.

Connections:

Flanges SAE2", 3".

Threaded ports and multiple ports available.

Filter housing:

Aluminium head and cover.

Seal material:

Nitrile, fluoroelastomer, neoprene.

Operating temperature range:

Seal material Nitrile: -40° to +100°C.

Seal material Fluoroelastomer: -20° to +120°C.

Bypass setting

Opening pressure 0.8 / 1.5 or 2 bar.

Other settings on request.

Degree of filtration:

Determined by multipass test according to ISO 16889.

Flow fatigue characteristics:

Filter media is supported so that the optimum fatigue life is achieved.

Filtration media:

Microglass III and Ecoglass III for *LEIF*® elements.

Also available 10µm Cellulose and 40µm stainless steel mesh.

Element collapse rating:

10 bar (ISO 2941).

Pressure indicator options:

Setting 0.7 or 1.2 bar.

Other settings on request.

Visual pressure gauge.

Electrical pressure switch.

Options:

Diffuser type P (straight pipe, no perforated plate area)

Diffuser type T (with closed diffuser end cap and with perforated plate area, recommended when oil entry in reservoir is close to the reservoir bottom or to ensure oil entry under the reservoir oil level)

Magnetic pack:

Standard.

Filling port in cover (optional):

BGT 3 = Plugged G1¹/₄. BGT 4 = Plugged G1¹/₂.

Filter element:

LEIF® element with reusable metal element sleeve.

Conventional style element with steel end caps.

The *LEIF*® element is patented and safeguards the use of genuine parts.

Note:

LEIF® element can be used with mineral and HEES type oils.


For other fluids consult Parker Filtration.

LEIF® contributes to ISO 14001 quality standards.


BGT-3 Length 11 and 12 (<i>LEIF</i> ® version)		
Ref.	No.	Description
1	1	Nut
2	1	Washer
3	1	Cover
4	1	Cover-seal
5	1	Top-spring
6	1	Housing
7	1	Insert-seal
8	1	Plug M10x1
9	1	Bonded seal
10	1	Insert
11	1	<i>LEIF</i> ® element
12	1	Element sleeve
13	1	Gasket
14	1	O-ring
15	1	Bypass set
16	1	Diffuser

BGT-4 Length 13 and larger (conventional element)		
Ref.	No.	Description
1	1	Nut
2	1	Washer
3	1	Cover
4	1	Cover-seal
5	1	Top-spring
6	1	Housing
7	1	Insert-seal
8	1	Plug M10x1
9	1	Bonded seal
10	1	Insert
11	1	Element seal
12	1	Element
13	1	O-ring
14	1	O-ring
15	1	Bypass set
16	1	Diffuser

BGT-3 (*LEIF*® version)

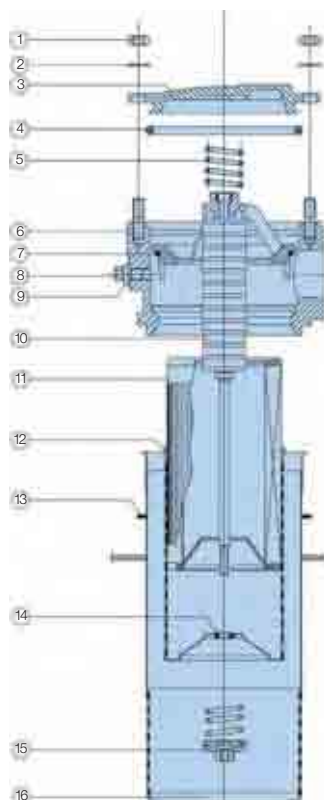


BGT-4 (conventional element)

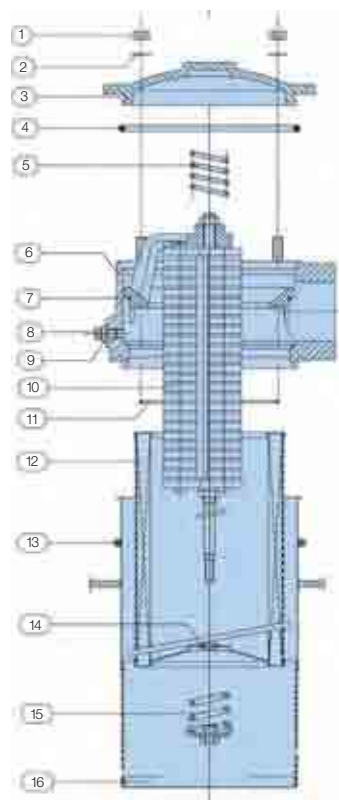

Tanktop Mounted Return Line Filters


Specification (cont.)

BGT-3 with diffuser

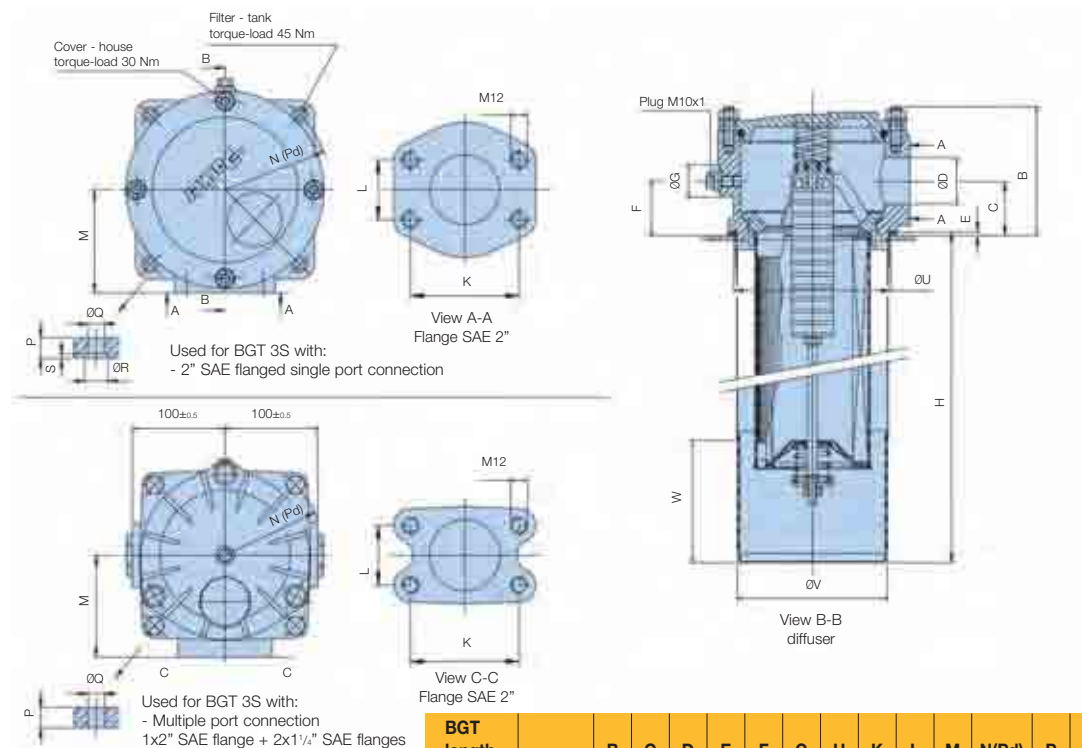



BGT length		B	C	D	E	F	G	H	K	L	M	N(Pd)	P	Q	R	S	U	V	W	Kg
11	BGT390	139	59	50	3	59	35	350	78	43	105	R107.5	14	13	16	3	165.5 ^{+0.5} ₀	165	120	7.2
12	BGT500							540												8.6
Multipleport connection		(131)	(55)			(55)					(110)		(15)				(166 ^{+0.5} ₀)			

BGT-3 without diffuser

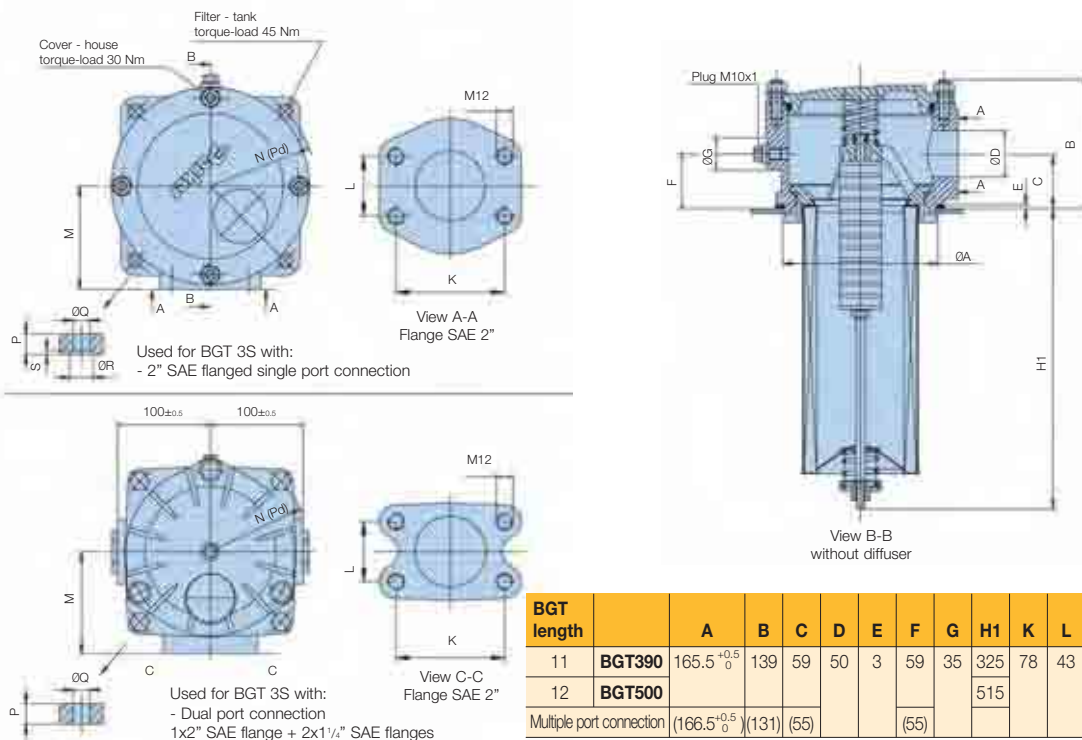

BGT length		A	B	C	D	E	F	G	H1	K	L	M	N(Pd)	P	Q	R	S	Kg
11	BGT390	165.5 ^{+0.5} ₀	139	59	50	3	59	35	325	78	43	105	R107.5	14	13	16	3	7.2
12	BGT500								515									8.6
Multiple port connection		(166.5 ^{+0.5} ₀)	(131)	(55)			(55)					(110)		(15)				



BGT-4 with diffuser

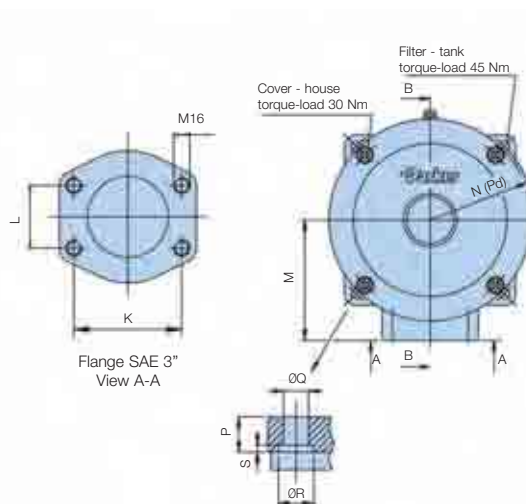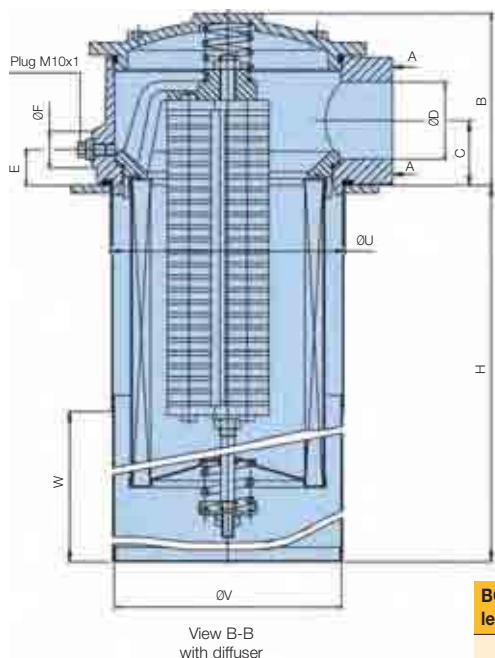

BGT length		B	C	ØD	E	ØF	H	K	L	M	N(Pd)	P	ØQ	ØR	S	ØU	ØV	W	Kg.
13	BGT600						425												20.5
14	BGT800						535												23.0
15	BGT1000	178	67	80	37	40	640	106.4	62	170	R147.5	20	14	20	4	240.5 ^{+0.5} ₀	240	170	25.5
16	BGT1500						920												30.0
17	BGT2000						1200												37.0
18	BGT2400						1200												37.0

Note: dimensions of BGT-2400 identical to BGT-2000. Dimensions in mm

BGT-4 without diffuser

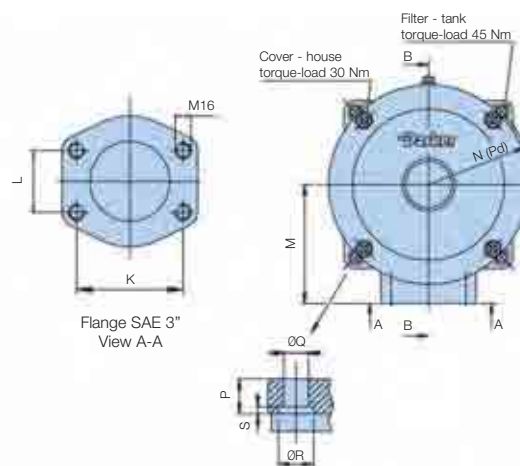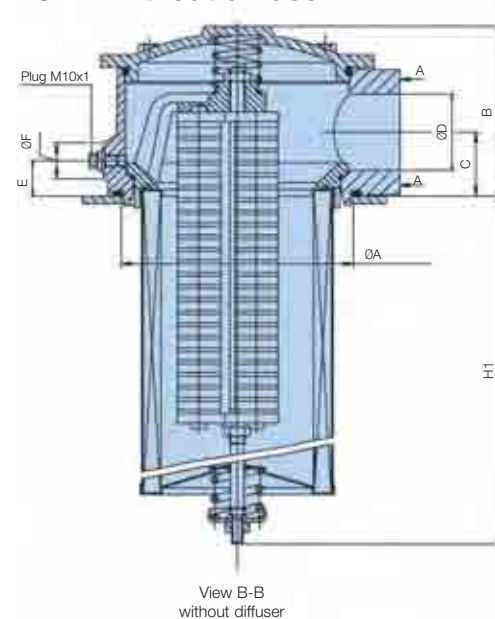


BGT length		ØA	B	C	ØD	E	ØF	H1	K	L	M	N(Pd)	P	ØQ	ØR	S	Kg.
13	BGT600							385									20.5
14	BGT800							495									23.0
15	BGT1000	239.5 ^{+0.5} ₀	178	67	80	37	40	598	106.4	62	170	R147.5	20	14	20	4	25.5
16	BGT1500							878									30.0
17	BGT2000							1143									37.0
18	BGT2400							1143									37.0

Note: dimensions of BGT-2400 identical to BGT-2000. Dimensions in mm


Tanktop Mounted Return Line Filters

Specification (cont.)

BGT F1^{1/4} manifold type - with diffuser

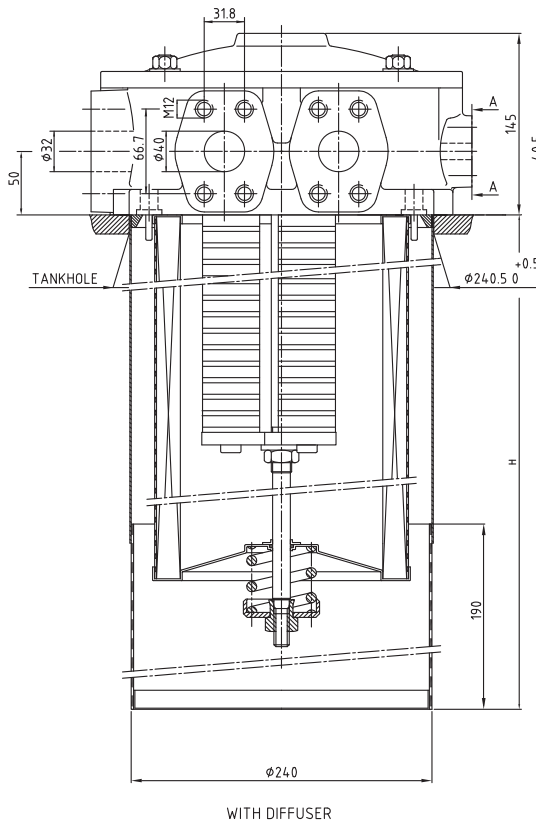


TYPE	H
BGT-4-600L	420
BGT-4-800L	530
BGT-4-1000L	635
BGT-4-1500L	915
BGT-4-2000L	1180

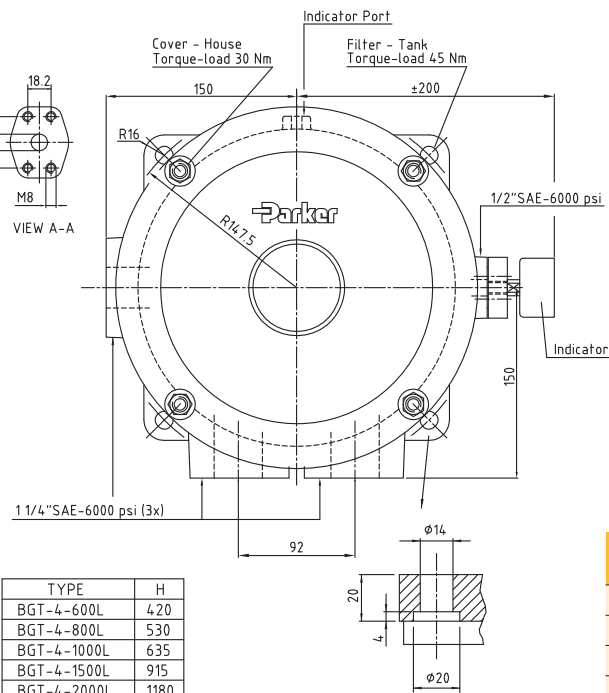


BGT length		H
13	BGT600L	420
14	BGT800L	530
15	BGT1000L	636
16	BGT1500L	915
17	BGT2000L	1180
18	BGT2400L	1180

Dimensions in mm

BGT F1^{1/4} manifold type - without diffuser

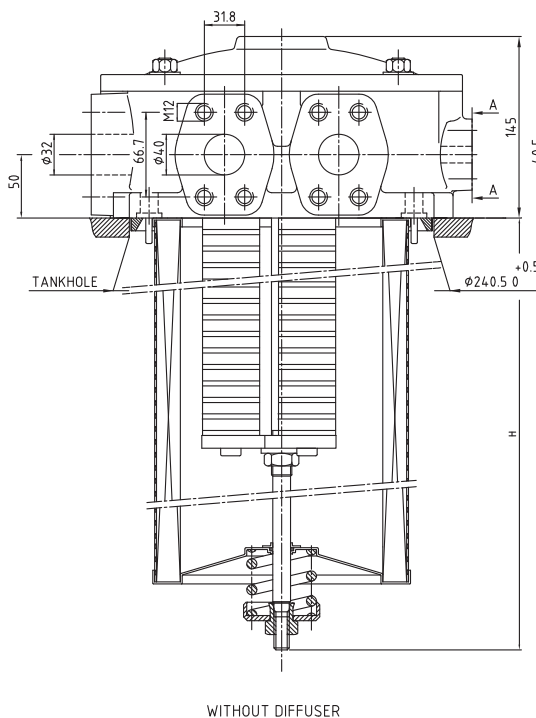

TYPE	H
BGT-4-600L	385
BGT-4-800L	495
BGT-4-1000L	598
BGT-4-1500L	878
BGT-4-2000L	1143

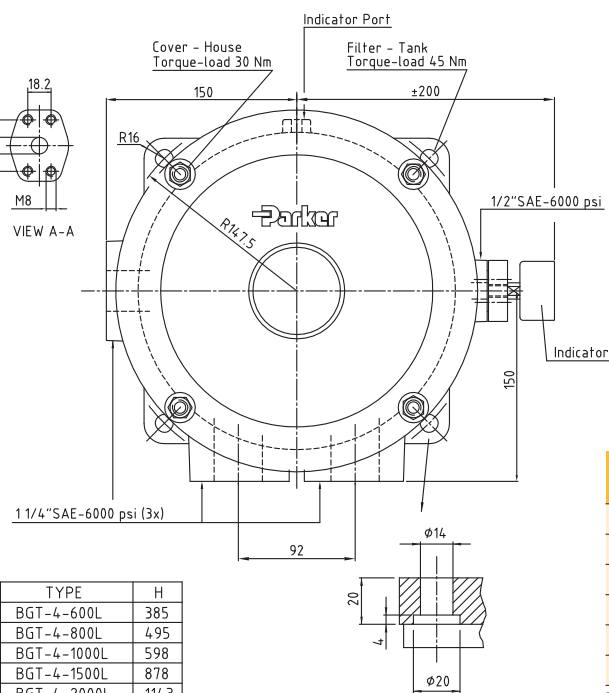


BGT length		H
13	BGT600L	385
14	BGT800L	495
15	BGT1000L	598
16	BGT1500L	878
17	BGT2000L	1143
18	BGT2400L	1143

Dimensions in mm

Indicator Options


Indicator PS pressure switch

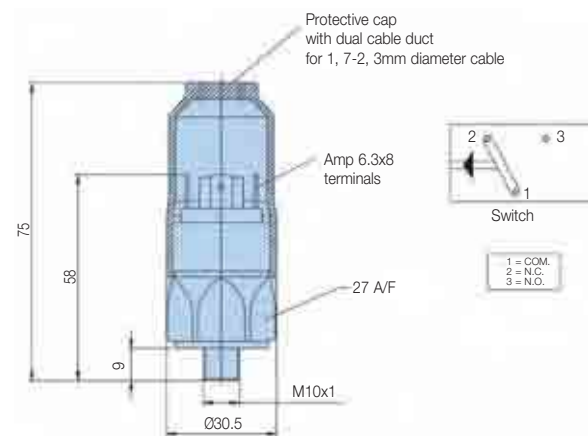

Specifications	
Elec.rating	42V / 4A
Thread connection	M10x1
Elec.connection	AMP 6.3x0.8 terminals + protective cap
Protection	IP65 (with cap) terminals IP00
Code	FMUS1EBMM10L (Switch)

Indicator Connection / Filter Head Matrix	
Port(s) Filter head	Indicator Thread
2" SAE BGT length 11 and 12	M10
3" SAE BGT Length 13 and larger	M10
1x2"SAE Flanged + 2 x 1 1/4" SAE Flanged for BGT Length 11 and 12	G 1/8"
3x1 1/4" SAE Flanges + 1x 1/2" SAE for BGT Length 13 and larger	M10

Indicator PS NO/NC pressure switch

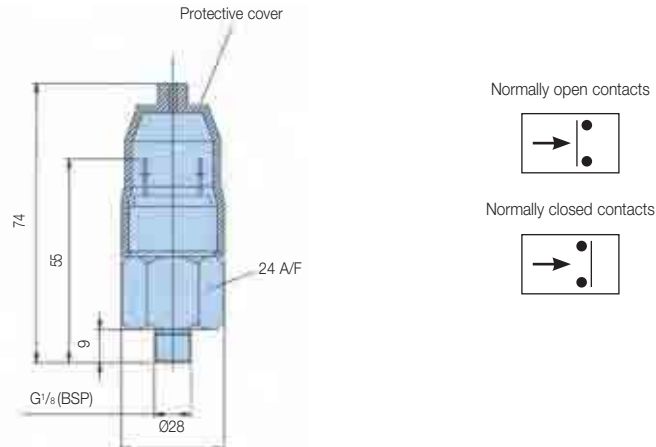

Specifications	
Elec.rating	42V / 2A
Thread connection	G 1/8
Elec.connection	AMP terminal 6.3x0.8
Protection	IP65 (terminal IP00)
Switch type	NO or NC
Code	FMUS2EBMG02L (NO switch) FMUS3EBMG02L (NC switch)

Visual indicator	
M10 code	FMUG1EBPM10L
G 1/8 code	FMUG2EBPG02L

Pressure Drop Curves


The recommended level of the initial pressure drop for low pressure filters is max 0.5 bar.

If the medium used has a viscosity different from 32cSt, pressure drop over the filter can be estimated as follows:


$$\Delta p = (\Delta p_{32} \times \text{viscosity of medium used}) / 32\text{cSt}$$

Filter housing and element pressure drop based on 32cSt fluid viscosity and 0.87 density.


BGT Empty Housing 2"SAE (Length code 11 and 12)

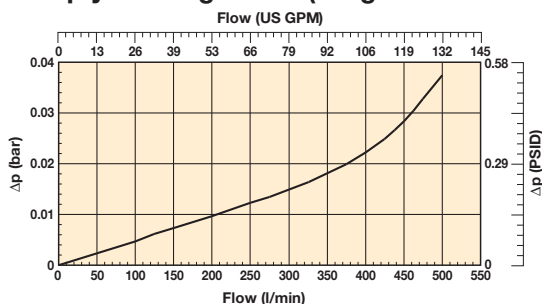

BGT390 (Element length code 11)

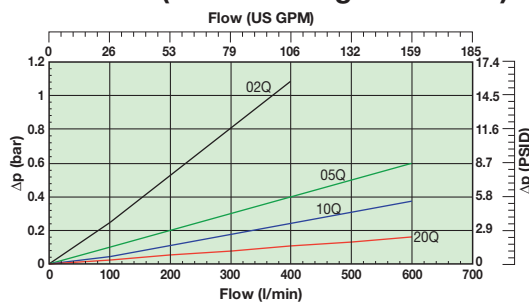

BGT500 (Element length code 12)

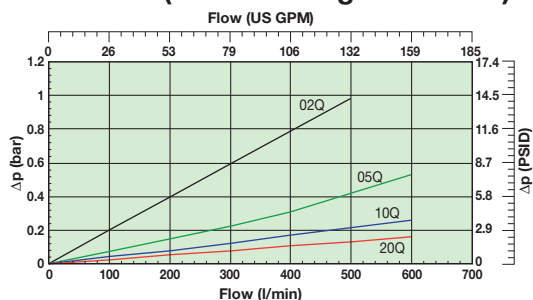


BGT Series


Tanktop Mounted Return Line Filters

Pressure Drop Curves (cont.)


BGT Empty Housing 3"SAE (Length 13 and larger)

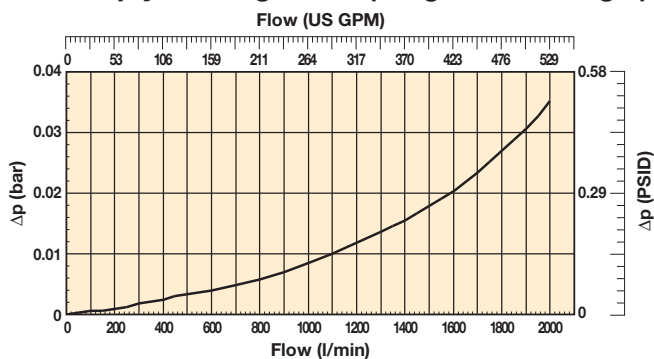


BGT600 (Element length code 13)

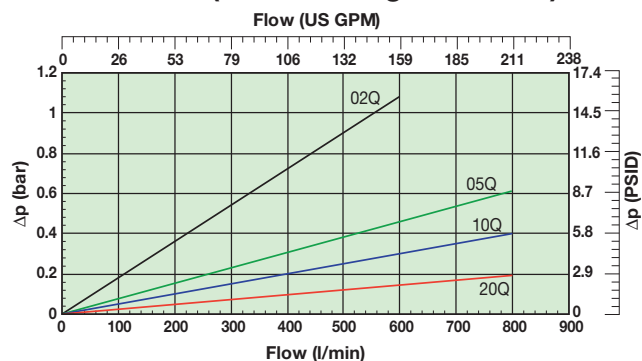


BGT800 (Element length code 14)

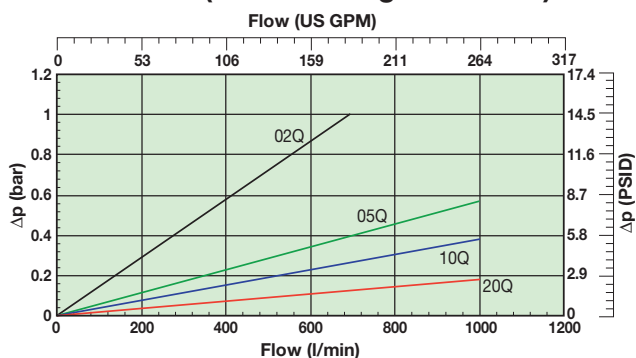


BGT1000 (Element length code 15)

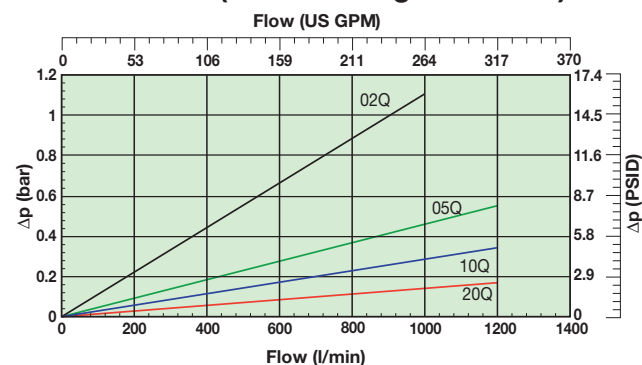


BGT1500 (Element length code 16)

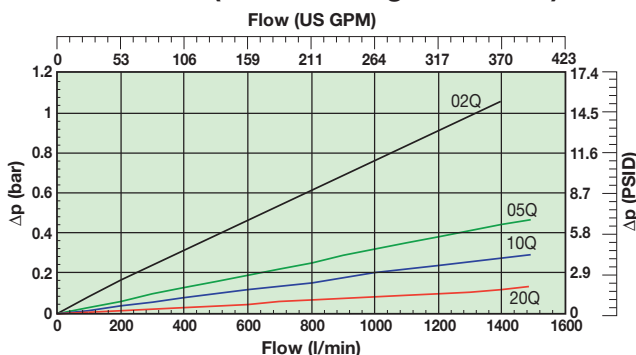

BGT2000 (Element length code 17)

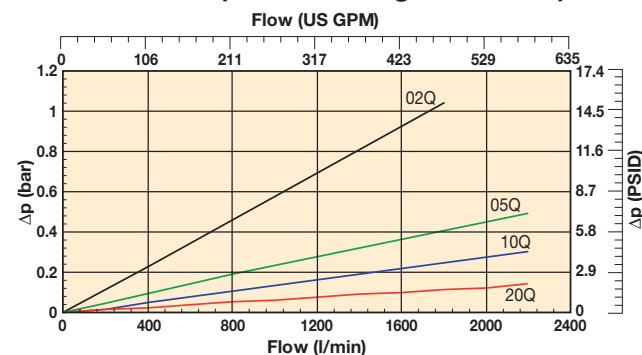


BGT2400 (Element length code 18)

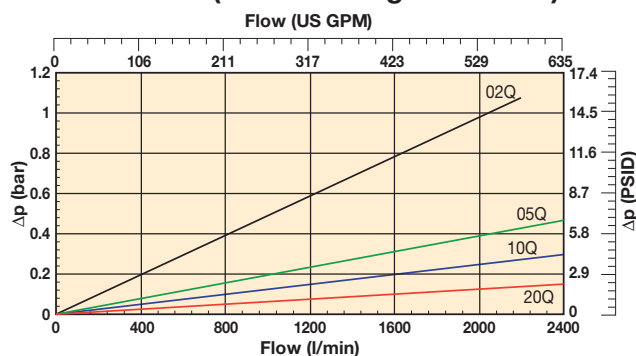


Pressure Drop Curves (cellulose and stainless steel media)


BGT390 (Element length code 11)
Cellulose & Stainless steel media

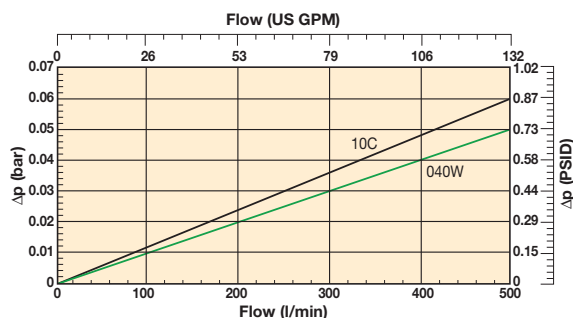


BGT390 (Element length code 11)
Cellulose & Stainless steel media

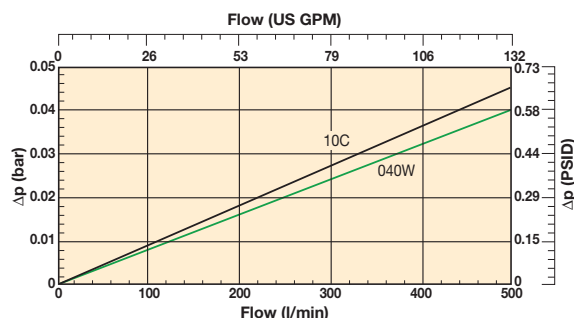


BGT600 (Element length code 13)
Cellulose & Stainless steel media

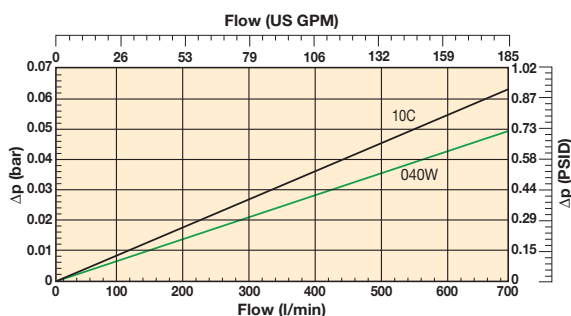


BGT800 (Element length code 14)
Cellulose & Stainless steel media

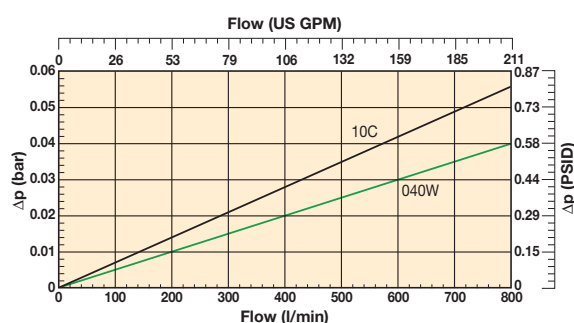


BGT1000 (Element length code 15)
Cellulose & Stainless steel media

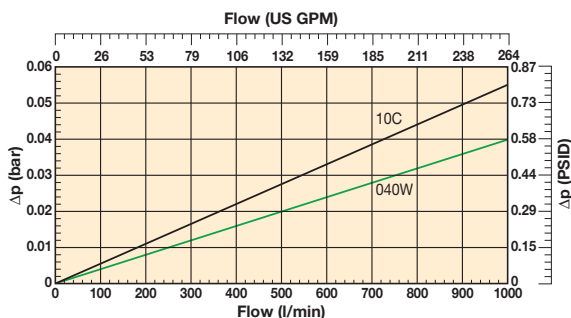

BGT1500 (Element length code 16)
Cellulose & Stainless steel media

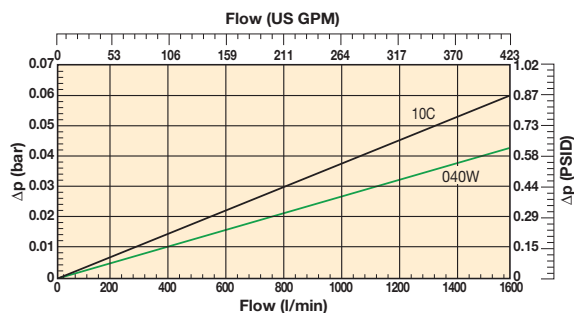

BGT2000 (Element length code 17)
Cellulose & Stainless steel media

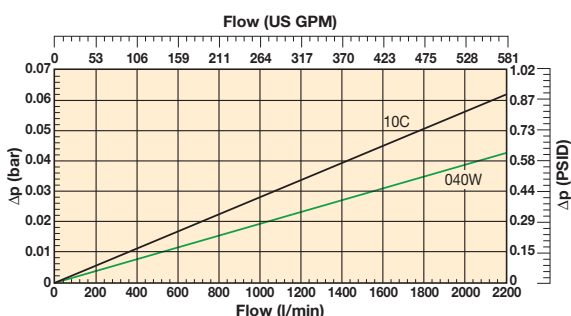

Cellulose and stainless steel media
Example: BGT2000 Filter Element Length 17 - cellulose and stainless steel media



BGT Series

Tanktop Mounted Return Line Filters

Ordering Information

Standard products table

Part number	Supersedes	Flow (l/min)	Model number	Element length	Media rating (μ)	Seals	Indicator	Bypass settings	Ports	Included options	Replacement elements	Supersedes
BGT1210QLBPER323	BGTS500-S2 TXWL8C-10 T B15 M	500	BGT500	Length 12	10	Nitrile	Plugged	1.5 Bar (22 Psi)	2"SAE-3000 PSI	Diffuser type T	937859Q	TXWL8L-10
BGT1220QLBPER323	BGTS500-S2 TXWL8C-20 T B15 M	500	BGT500	Length 12	20	Nitrile	Plugged	1.5 Bar (22 Psi)	2"SAE-3000 PSI	Diffuser type T	937868Q	TXWL8L-20
BGT1510QLBPER483	BGTS1000-S3 TXWL12-10 T B15 M	1000	BGT1000	Length 15	10	Nitrile	Plugged	1.5 Bar (22 Psi)	3"SAE-3000 PSI	Diffuser type T	937862Q	TXWL12-10
BGT1520QLBPER483	BGTS1000-S3 TXWL12-20 T B15 M	1000	BGT1000	Length 15	20	Nitrile	Plugged	1.5 Bar (22 Psi)	3"SAE-3000 PSI	Diffuser type T	937865Q	TXWL12-20
BGT1710QBPER483	BGTS2000-S3 TXW14-10 T B15 M	2000	BGT2000	Length 17	10	Nitrile	Plugged	1.5 Bar (22 Psi)	3"SAE-3000 PSI	Diffuser type T	937772Q	TXW14-10B
BGT1720QBPER483	BGTS2000-S3 TXW14-20 T B15 M	2000	BGT2000	Length 17	20	Nitrile	Plugged	1.5 Bar (22 Psi)	3"SAE-3000 PSI	Diffuser type T	937805Q	TXW14-20B

Note: Filter assemblies ordered from the product configurator below are on extended lead times. Where possible, please make your selection from the table above.

Product configurator

Configurator examples filter including *LEIF*[®] element

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
BGT	15	05QL	B	S1	E	R48	C

Configurator examples filter including conventional element

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
BGT	18	02Q	B	S4	E	3R20	4

Box 1

Code
BGT

Box 2

Filter type	
Housing	Code
BGT390	11
BGT500	12
BGT600	13
BGT800	14
BGT1000	15
BGT1500	16
BGT2000	17
BGT2400	18

Box 3

Degree of filtration						
Element media	Glass fibre					Wire mesh
	Microglass III (for disposable elements)					
	Ecoglass III (for Leif® elements)					
	Cellulose					
	Nom. rating					Abs. rating
Disposable element	10C	02Q	05Q	10Q	20Q	040W
LEIF® element		02QL	05QL	10QL	20QL	

Box 4

Seal type	
Seal material	Code
Nitrile	B
Fluorelastomer	V
Neoprene	on request

Box 5

Indicator	
	Code
Pressure gauge, setting 1.2 bar, M10x1	G1
Pressure gauge, setting 1.2 bar, G ¹ / ₈ for dual port head	G2
Pressure switch 42V, 1.2 bar setting, NO/NC, M10x1	S1
Pressure switch 42V, 1.2 bar setting, NO with G ¹ / ₈ BSP	S2
Pressure switch 42V, 1.2 bar setting, NC with G ¹ / ₈ BSP	S3
Pressure switch 250V, NO/NC with G ¹ / ₈	S4
Pressure switch 220V, NO/NC with M10	S5
No indicator, indicator ports not machined	On request
No indicator, indicator port B plugged	P
Other settings for indicators / gauges on request	on request
Note: For all dual head ports for BGTS apply G ¹ / ₈ connection for indicators	

Box 6

Bypass valve	
Bypass valve	Code
0.8 bar	B
1.5 bar	E
2.0 bar for BGT-3 series (length 11 and 12)	H
Blocked bypass	X
Other bypass settings	on request

Note: For all dual head ports for BGTS apply G¹/₈ connection for indicators

Box 7	Box 8																																												
Filter connection	Options																																												
<table><tr><th>Ports</th><th>Code</th></tr><tr><td>2" SAE BGT length 11 and 12</td><td>R32</td></tr><tr><td>3" SAE BGT Length 13 and larger</td><td>R48</td></tr><tr><td>1x2" SAE Flanged + 2 x 1¹/₂" SAE Flanged for BGT Length 11 and 12</td><td>R32M</td></tr><tr><td>3x1¹/₂" SAE Flanges + 1x 1¹/₂" SAE for BGT Length 13 and larger</td><td>3R20</td></tr></table>	Ports	Code	2" SAE BGT length 11 and 12	R32	3" SAE BGT Length 13 and larger	R48	1x2" SAE Flanged + 2 x 1 ¹ / ₂ " SAE Flanged for BGT Length 11 and 12	R32M	3x1 ¹ / ₂ " SAE Flanges + 1x 1 ¹ / ₂ " SAE for BGT Length 13 and larger	3R20	<table><tr><th>Options</th><th>Code</th></tr><tr><td>No diffuser required</td><td>1</td></tr><tr><td>Diffuser type T with perforated plate area</td><td>3</td></tr><tr><td>Diffuser type P without perforated plate area</td><td>4</td></tr><tr><td>Diffuser with integrated hose connection</td><td>on request</td></tr><tr><td>No magnets</td><td>5</td></tr><tr><td>Dipstick</td><td>6</td></tr><tr><td>Plugged filling port</td><td>8</td></tr><tr><td>Diffuser type T and no magnets</td><td>A</td></tr><tr><td>Diffuser type P and no magnets</td><td>B</td></tr><tr><td>Diffuser type T, no magnets, plugged filling port</td><td>C</td></tr><tr><td>Diffuser type P, no magnets, plugged filling port</td><td>D</td></tr><tr><td>Diffuser type T, magnets and filling port</td><td>E</td></tr><tr><td>Diffuser type P, magnets and filling port</td><td>F</td></tr><tr><td>Air tight diffuser type T</td><td>G</td></tr><tr><td>Air tight diffuser type P</td><td>H</td></tr><tr><td>Other combinations</td><td>on request</td></tr></table>	Options	Code	No diffuser required	1	Diffuser type T with perforated plate area	3	Diffuser type P without perforated plate area	4	Diffuser with integrated hose connection	on request	No magnets	5	Dipstick	6	Plugged filling port	8	Diffuser type T and no magnets	A	Diffuser type P and no magnets	B	Diffuser type T, no magnets, plugged filling port	C	Diffuser type P, no magnets, plugged filling port	D	Diffuser type T, magnets and filling port	E	Diffuser type P, magnets and filling port	F	Air tight diffuser type T	G	Air tight diffuser type P	H	Other combinations	on request
Ports	Code																																												
2" SAE BGT length 11 and 12	R32																																												
3" SAE BGT Length 13 and larger	R48																																												
1x2" SAE Flanged + 2 x 1 ¹ / ₂ " SAE Flanged for BGT Length 11 and 12	R32M																																												
3x1 ¹ / ₂ " SAE Flanges + 1x 1 ¹ / ₂ " SAE for BGT Length 13 and larger	3R20																																												
Options	Code																																												
No diffuser required	1																																												
Diffuser type T with perforated plate area	3																																												
Diffuser type P without perforated plate area	4																																												
Diffuser with integrated hose connection	on request																																												
No magnets	5																																												
Dipstick	6																																												
Plugged filling port	8																																												
Diffuser type T and no magnets	A																																												
Diffuser type P and no magnets	B																																												
Diffuser type T, no magnets, plugged filling port	C																																												
Diffuser type P, no magnets, plugged filling port	D																																												
Diffuser type T, magnets and filling port	E																																												
Diffuser type P, magnets and filling port	F																																												
Air tight diffuser type T	G																																												
Air tight diffuser type P	H																																												
Other combinations	on request																																												

Highlights Key (Denotes part number availability)

123	Item is standard
123	Item is standard green option
123	Item is semi standard
123	Item is non standard

Note: Standard items are in stock, semi standard items are available within four weeks

Note 1: Part numbers featured with bold highlighted codes will ensure a 'standard' product selection.

Note 2: Alternate displayed part number selection will require you to contact Parker Filtration for availability.



Parker Hannifin
Hydraulic Filter Division Europe
FDHB500UK.

Ordering Information (cont.)

Degree of filtration						Media code
Average filtration beta ratio β (ISO 16889) / particle size μm [c]						
$\beta x(c)=2$	$\beta x(c)=10$	$\beta x(c)=75$	$\beta x(c)=100$	$\beta x(c)=200$	$\beta x(c)=1000$	
% efficiency, based on the above beta ratio (βx)						
50.0%	90.0%	98.7%	99.0%	99.5%	99.9%	
N/A	N/A	N/A	N/A	N/A	4.5	02Q/02QL
N/A	N/A	4.5	5	6	7	05Q/05QL
N/A	6	8.5	9	10	12	10Q/10QL
6	11	17	18	20	22	20Q/20QL

Supersedes spare element table				
BGT390	TXWL8A-2	TXWL8A-5	TXWL8A-10	TXWL8A-20
Part number spare element	937832Q	937843Q	937858Q	937869Q
BGT500	TXWL8C-2	TXWL8C-5	TXWL8C-10	TXWL8C-20
Part number spare element	937833Q	937842Q	937859Q	937868Q
BGT600	TXWL10-2	TXWL10-5	TXWL10-10	TXWL10-20
Part number spare element	937834Q	937841Q	937860Q	937867Q
BGT800	TXWL11-2	TXWL11-5	TXWL11-10	TXWL11-20
Part number spare element	937835Q	937840Q	937861Q	937866Q
BGT1000	TXWL12-2	TXWL12-5	TXWL12-10	TXWL12-20
Part number spare element	937836Q	937839Q	937862Q	937865Q
BGT1500	TXWL13-2	TXWL13-5	TXWL13-10	TXWL13-20
Part number spare element	937837Q	937838Q	937863Q	937864Q

Supersedes spare element table						
BGT390	TXW8A-10-B	TXW8A-2-B	TXW8A-5-B	TXW8A-10-B	TXW8A-20-B	ST8A-40-B
Part number spare element	937728	937742Q	937763Q	937778Q	937799Q	937813
BGT500	TXW8C-10-B	TXW8C-2-B	TXW8C-5-B	TXW8C-10-B	TXW8C-20-B	ST8C-40-B
Part number spare element	937729	937741Q	937764Q	937777Q	937800Q	937812
BGT600	TXW10-10-B	TXW10-2-B	TXW10-5-B	TXW10-10-B	TXW10-20-B	ST10-40-B
Part number spare element	937730	937740Q	937765Q	937776Q	937801Q	937811
BGT800	TXW11-10-B	TXW11-2-B	TXW11-5-B	TXW11-10-B	TXW11-20-B	ST11-40-B
Part number spare element	937731	937739Q	937766Q	937775Q	937802Q	937810
BGT1000	TXW12-10-B	TXW12-2-B	TXW12-5-B	TXW12-10-B	TXW12-20-B	ST12-40-B
Part number spare element	937732	937738Q	937767Q	937774Q	937803Q	937809
BGT1500	TXW13-R-10-B	TXW13-R-2-B	TXW13-R-5-B	TXW13-R-10-B	TXW13-R-20-B	ST13-40-B
Part number spare element	937733	937737Q	937768Q	937773Q	937804Q	937808
BGT2000	TXW14-10-B	TXW14-2-B	TXW14-5-B	TXW14-10-B	TXW14-20-B	ST14-40-B
Part number spare element	937734	937736Q	937769Q	937772Q	937805Q	937807
BGT2400	-	TXWH14-2-B	TXWH14-5-B	TXWH14-10-B	TXWH14-20-B	-
Part number spare element		937735Q	937770Q	937771Q	937806Q	

BGT Series Seal Kits

BGT Filter connection	Nitrile Seal kit
Port(s) Filter head	Part Number
2" SAE BGT length 11 and 12	2049010017
3" SAE BGT Length 13 and larger	2049010023
1x2" SAE Flanged + 2 x 1 1/2" SAE Flanged for BGT Length 11 and 12	918045048
3x1 1/2" SAE Flanges + 1x 1/2" SAE for BGT Length 13 and larger	2049010020

Clearing the way for a greener future



Image courtesy of
Johnstone Sweepers



ENVIRONMENTALLY-FRIENDLY FILTRATION SOLUTIONS

Trust Parker to provide you with a range of 'green' filter products that impact positively on the environment. With the new E-series your customers benefit from a solution that's smarter, safer and more responsible when it comes to filtration.

By significantly reducing waste levels, the E-Series is designed to increase the lifespan of hydraulic machinery. The Suction Return filter series features *LEIF*® elements that can be crushed and incinerated. By reducing bulk for disposal and recycling the material, this cost-effective solution contributes to a safer, cleaner environment.

Through Parker's advanced Laser CM technology, all vehicle operators can monitor fluid contamination on-site through a simple two minute test. This accurate monitoring method helps prevent catastrophic failure in critical systems instantly.

When it comes to filtration solutions you can rely on - the future is Parker.

Enjoy the benefits of 'green' filtration, email filtrationinfo@parker.com

IN-AGB Series

In-Tank Mounted Return Line Filters

Max. 2400 l/min



Flow from inside to out

Designed for in-built filtration

The IN-AGB Series features a quick response bypass construction with low hysteresis, magnetic pre-filtration and a high dirt-holding capacity. Flow rates from 30 l/min to 2400 l/min. LEIF® elements available up to 1500 l/min. A low cost, high performance filter.

AN INNOVATIVE GREEN
FILTER FEATURING
LEIF®



Contact Information:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)
filtrationinfo@parker.com

www.parkerhfde.com

Product Features:

- IN-AGB features a bypass construction with low hysteresis.
- Magnetic pre-filtration and a high dirt-holding capacity.
- Wide range of diffusers including airtight options.
- Flow from inside to out.
- Flow rates from 30 l/min to 2400 l/min.
- Patented LEIF® elements safeguard filtration quality.

IN-AGB Series

In-Tank Mounted Return Line Filters

Features & Benefits

Features	Advantages	Benefits
Filter integrated in tank	Compact low cost solution Filter protected by reservoir	Suitable for extreme heavy duty applications or hazardous environments No tank top parts contributes to improved esthetical design
LEIF® elements	Patented element safeguards the use of genuine parts	Guaranteed quality of filtration Contributes to ISO 14001 certification
Magnetic pre-filtration	Removes ferrous particles, even during bypass conditions	Improved fluid cleanliness levels Extended element life time
In-to-Out filtration	All captured contamination retains inside the element	No recontamination of system during change of elements
High level of customisation	Dedicated system-matched solutions can be easily made available	Improved integration of filter in system combined with lower initial system costs
Quick response bypass with low hysteresis	Reduction of bypass period due to low hysteresis Only a small part of the total flow is bypassing the element	Improved protection of system
Standard or customised funnel	Ensures that oil enters the tank under the oil level	Significant reduction of oil foaming

Typical Applications

- Agricultural machines
- Articulated dump trucks
- Forestry equipment
- Wheeled loaders
- Lubrication systems
- Excavators

The Parker Filtration IN-AGB In-Tank Mounted Return Line Filters.

The low-cost, high-performance return line IN-AGB filter features Q3 filter media, a bypass construction with low hysteresis, magnetic pre-filtration and a high dirt-holding capacity. The range is capable of handling flow rates from 30 l/min up to 2400 l/min. LEIF® elements are available for flow rates up to 1500 l/min, meeting the most stringent demands for environmentally-friendly filtration and offering protection against poor quality pirate elements.



Specification

Assembly:

Inside tank.

Seal material:

Nitrile, fluoroelastomer, neoprene.

Operating temperature range:

Seal material Nitrile: -40° to +100°C.

Seal material Fluoroelastomer: -20° to +100°C.

Bypass setting:

0.8/1.5 and 2.0 bar.

Other settings on request.

Degree of filtration:

Determined by multipass test according to ISO 16889.

Flow fatigue characteristics:

Filter media is supported so that the optimal fatigue life is achieved.

Filtration media:

Microglass III, Ecoglass III for *LEIF*® elements

Also available 10µm Cellulose and 40µm stainless steel mesh.

Element collapse rating:

10 bar (ISO 2941).

Options:

Diffuser type P (straight pipe, no perforated plate area)

Diffuser type T (with closed diffuser end cap and with perforated plate area, recommended when oil entry in reservoir is close to the reservoir bottom or to ensure oil entry under the reservoir oil level)

Magnetic pack:

Standard.

Note: IN-AGB 2-400 and 2-500 are standard supplied without magnets.

Filter element:

LEIF® element with reusable metal element sleeve.

Optional conventional style element with steel end caps.

The *LEIF*® element is patented and safeguards the use of genuine parts.

Note: *LEIF*® element can be used with mineral and HEES type oils.

For other fluids consult Parker Filtration.

LEIF® contributes to ISO 14001 quality standards.


Insert-AGB *LEIF*® 3 series

Ref.	No.	Description
1	1	Top-spring
2	1	Insert
3	1	Insert-seal
4	1	<i>LEIF</i> ® Element
5	1	Sleeve
6	1	Gasket
7	1	O-ring
8	1	Bypass set
9	1	Diffuser


Insert-AGB *LEIF*® 4 series

Ref.	No.	Description
1	1	Top-spring
2	1	Insert
3	1	Insert-seal
4	1	Inner sleeve
5	1	<i>LEIF</i> ®-element
6	1	Outer sleeve
7	1	O-ring
8	1	O-ring
9	1	Bypass set
10	1	Diffuser

1-3 Series

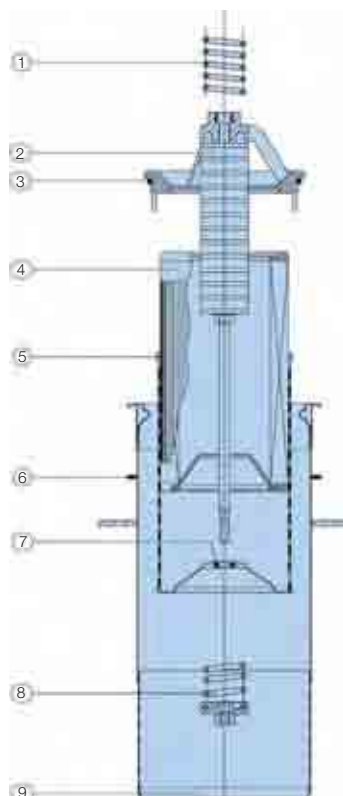


4 Series

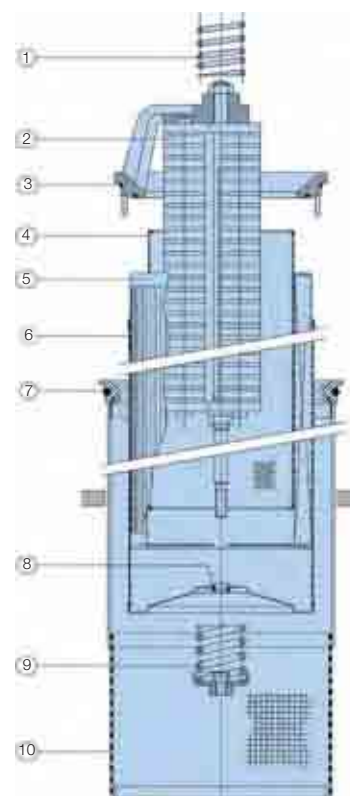


IN-AGB Series

In-Tank Mounted Return Line Filters

Specification (cont.)

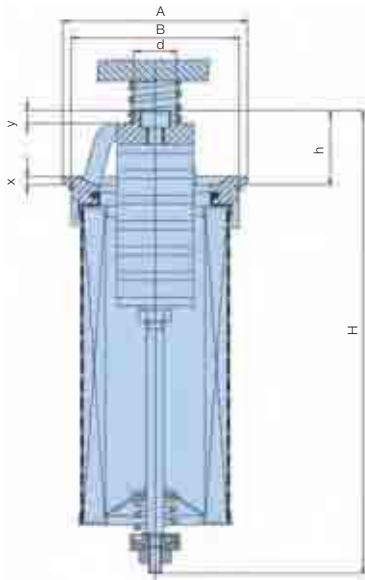


without diffuser

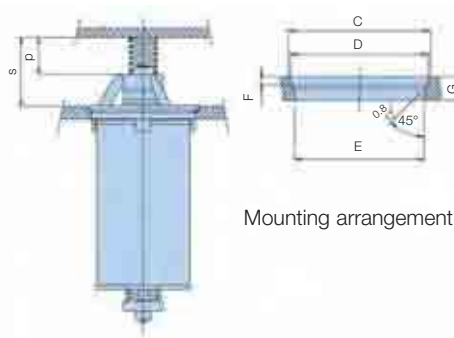



Mounting arrangement

	INAGB Length	Type	A	B	H	h	d	x	y	s	p	C	D	E	F	G
1 Series	0	IN30	87	79	122	35	20	4	6	45	20	88	85	80	4	12
	2	IN60	87	79	173	35	20	4	6	45	20	88	85	80	4	12
	3	IN90	87	79	217	35	20	4	6	45	20	88	85	80	4	12
	4	IN120	87	79	267	35	20	4	6	45	20	88	85	80	4	12
	5	IN125	87	79	381	35	20	4	6	45	20	88	85	80	4	12
2 Series	6	IN170	125	116	284	48	25	5	8	77	42	126	122	117	5	15
	7	IN230	125	116	360	48	25	5	8	77	42	126	122	117	5	15
	8	IN300	125	116	559	48	25	5	8	77	42	126	122	117	5	15
	9	IN400	125	116	579	48	25	5	8	77	42	126	122	117	5	15
	10	IN500	125	116	599	48	25	5	8	77	42	126	122	117	5	15
3 Series	11A	IN270	150	138	325	62	30	7	12	100	55	151	149	139	5	18
	11	IN390	150	138	407	62	30	7	12	100	55	151	149	139	5	18
	12	IN500	150	138	599	62	30	7	12	100	55	151	149	139	5	18

Dimensions in mm

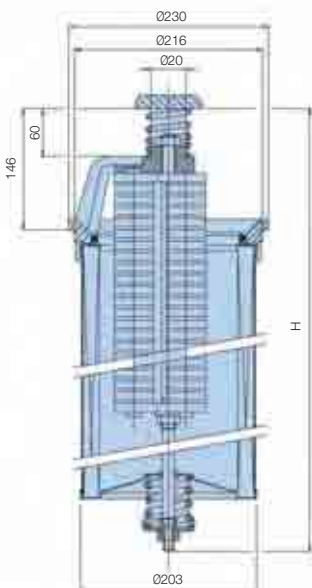



without diffuser

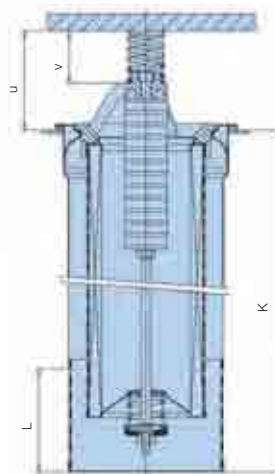

with diffuser

IN-AGB 3

IN-AGB 4



INAGB Length	Type	H
13	IN600	543
14	IN800	653
15	IN1000	758
16	IN1500	1038
17	IN2000	1303
18	IN2400	1303

Dimensions in mm

	INAGB Length	Type	K	L	M	U	V	Q	R
3 Series	11A	IN270	324	110	175	106	55	178	
	11	IN390	364	110	175	106	55	178	
	12	IN500(3)	554	125	175	106	55	178	
4 Series	13	IN600	445	183	239	145	60	250.5	2.5
	14	IN800	555	183	239	145	60	250.5	2.5
	15	IN1000	660	183	239	145	60	250.5	2.5
	16	IN1500	940	183	239	145	60	250.5	2.5
	17	IN2000	1220	183	239	145	60	250.5	2.5
	18	IN2400	1220	183	239	145	60	250.5	2.5

Dimensions in mm



Pressure Drop Curves


The recommended level of the initial pressure drop for low pressure filters is max 0.5 bar.

If the medium used has a viscosity different from 32cSt, pressure drop over the filter can be estimated as follows:


$$\Delta p = (\Delta p_{32} \times \text{viscosity of medium used}) / 32\text{cSt}$$

Filter housing and element pressure drop based on 32cSt fluid viscosity and 0.87 density.


IN30 (Element length code 0)

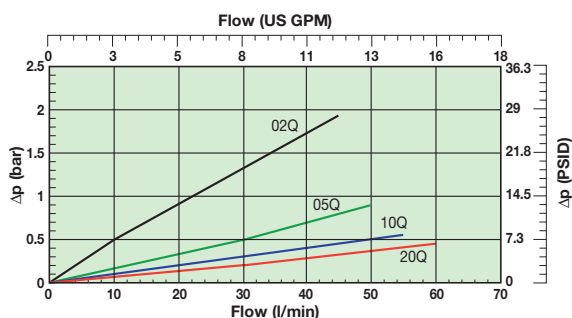


IN60 (Element length code 2)

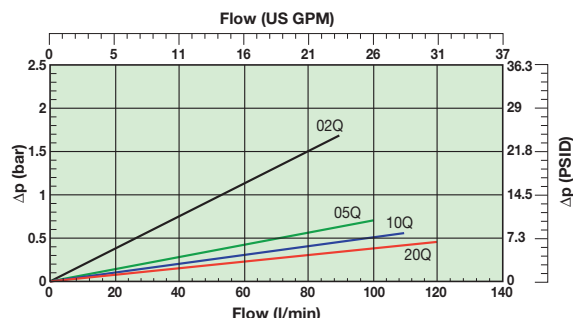


IN90 (Element length code 3)

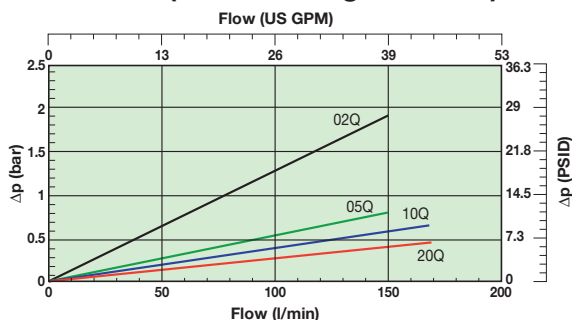


IN120 (Element length code 4)

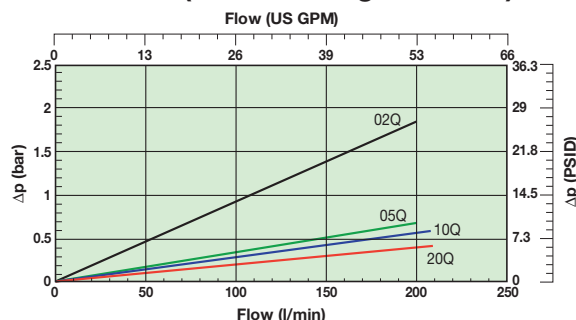


IN125 (Element length code 5)

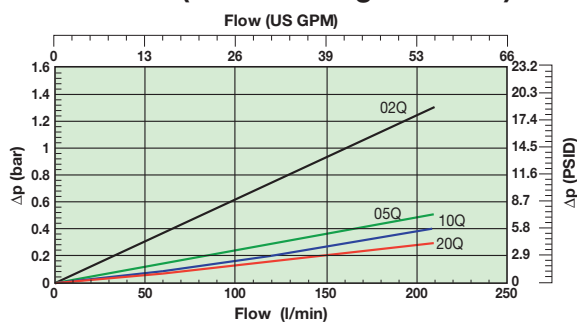


IN170 (Element length code 6)

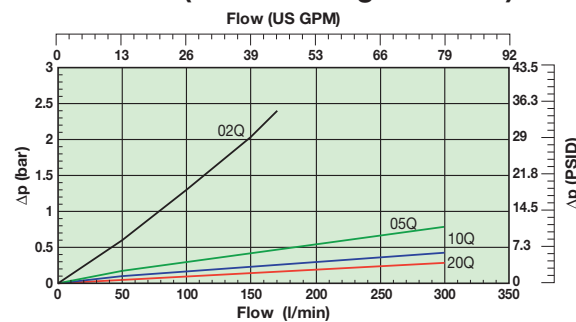

IN230 (Element length code 7)

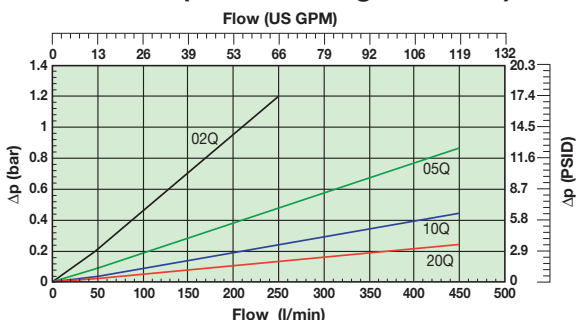

IN300 (Element length code 8)

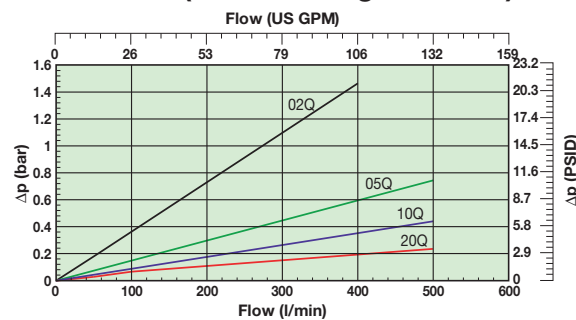


IN-AGB Series


In-Tank Mounted Return Line Filters

Pressure Drop Curves (cont.)


IN400 (Element length code 9)

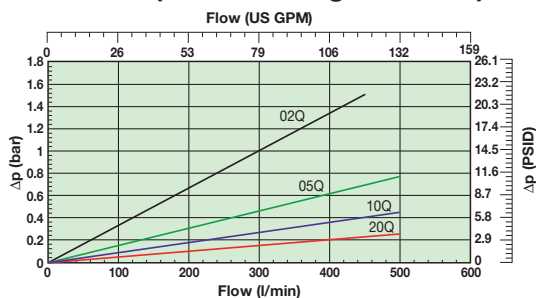


IN500 (Element length code 10)

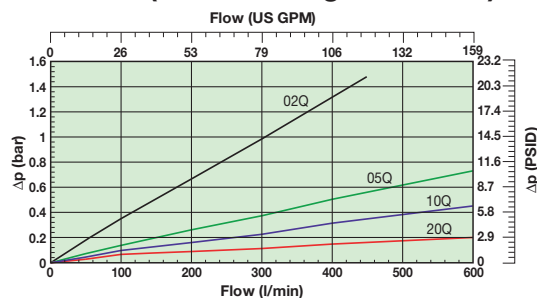


IN390 (3)(Element length code 11)

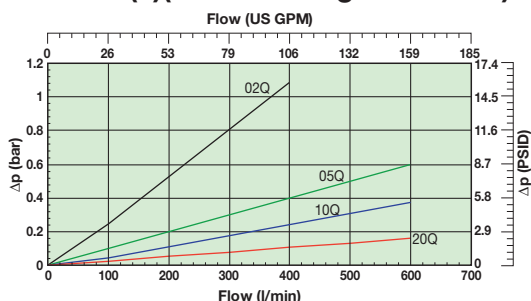


IN500 (3) (Element length code 12)

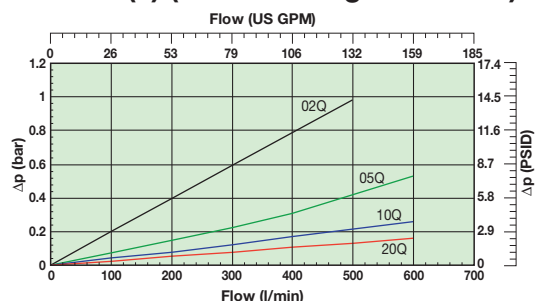


IN600 (Element length code 13)

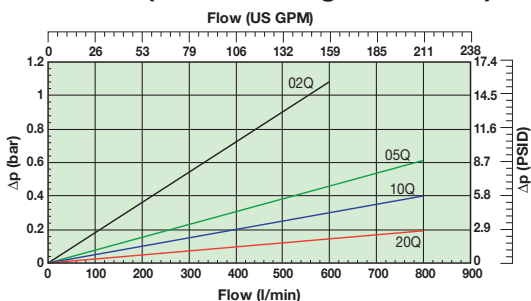


IN800 (Element length code 14)

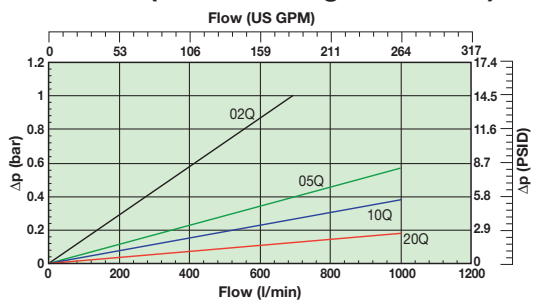


IN1000 (Element length code 15)

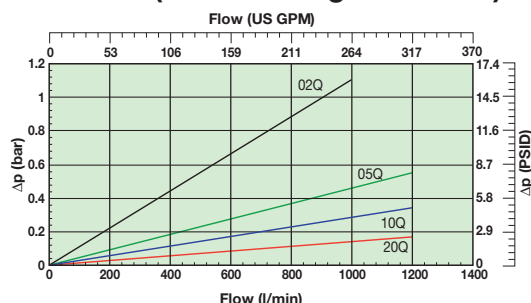


IN1500 (Element length code 16)

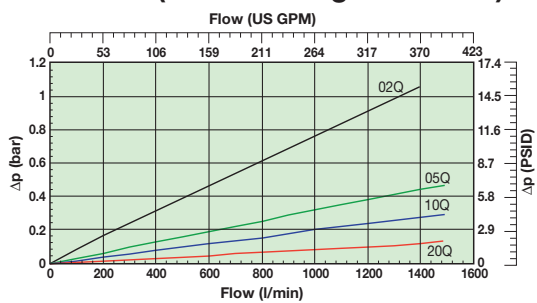

IN2000 (Element length code 17)

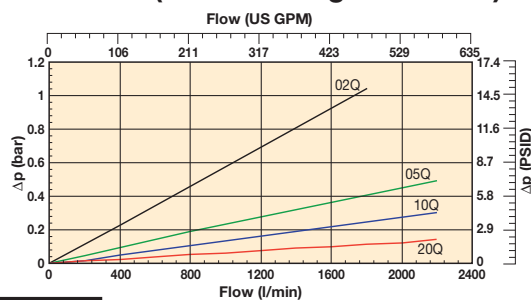


IN2400 (Element length code 18)

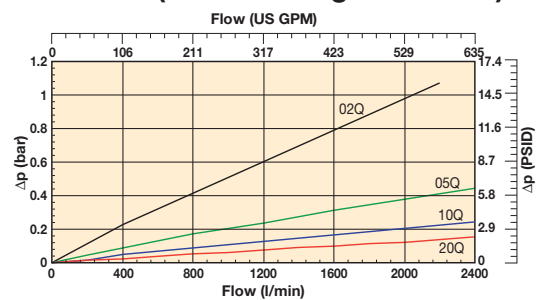


Pressure Drop Curves (cellulose and stainless steel media)


IN30 (Element length code 0)
Cellulose & Stainless steel media

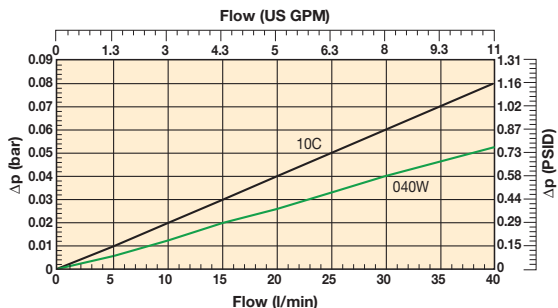


IN60 (Element length code 2)
Cellulose & Stainless steel media

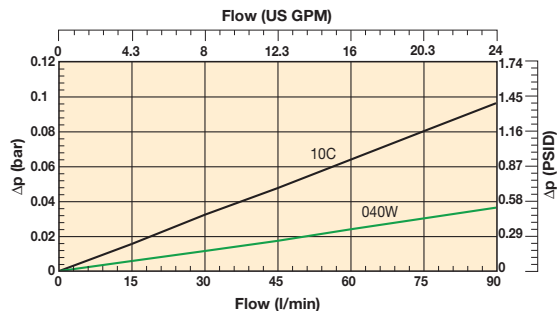


IN90 (Element length code 3)
Cellulose & Stainless steel media

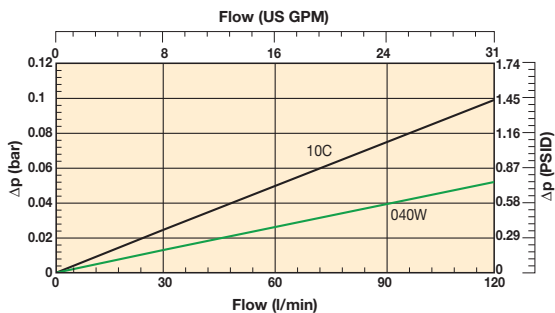


IN120 (Element length code 4)
Cellulose & Stainless steel media

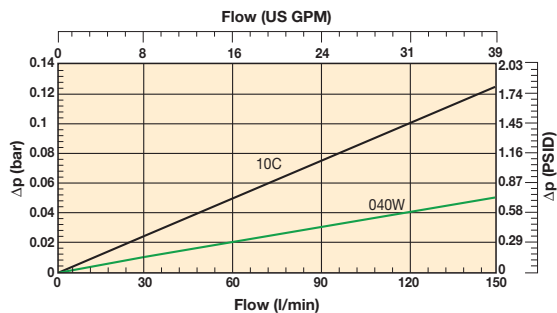


IN150 (Element length code 5)
Cellulose & Stainless steel media

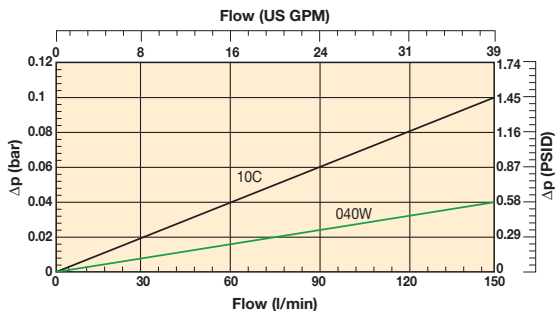


IN170 (Element length code 6)
Cellulose & Stainless steel media

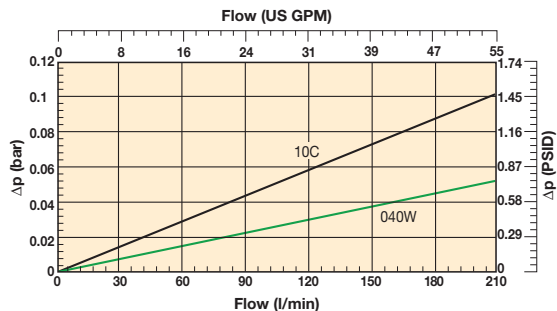

IN230 (Element length code 7)
Cellulose & Stainless steel media

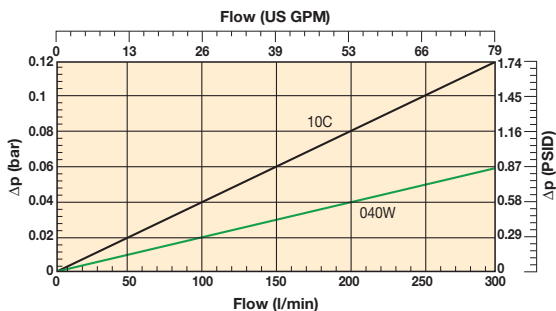

IN300 (Element length code 8)
Cellulose & Stainless steel media

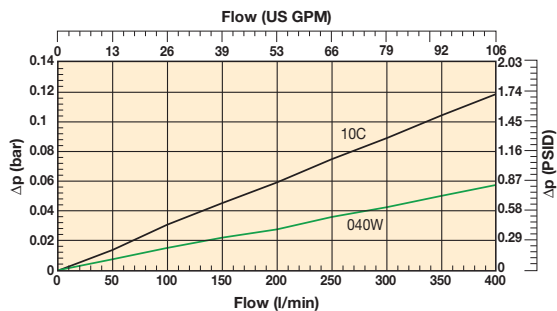


Cellulose and stainless steel media
Example: IN300 Filter Element Length 8 - Cellulose and stainless steel media

IN-AGB Series


In-Tank Mounted Return Line Filters

Pressure Drop Curves (cellulose and stainless steel media)


IN390 (Element length code 11)
Cellulose & Stainless steel media

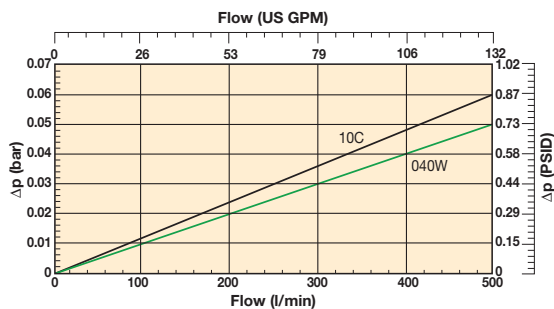


IN500 (Element length code 12)
Cellulose & Stainless steel media

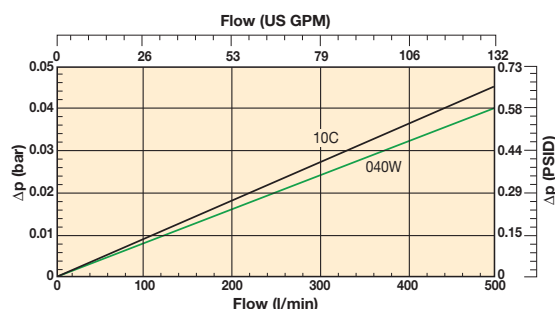


IN600 (Element length code 13)
Cellulose & Stainless steel media

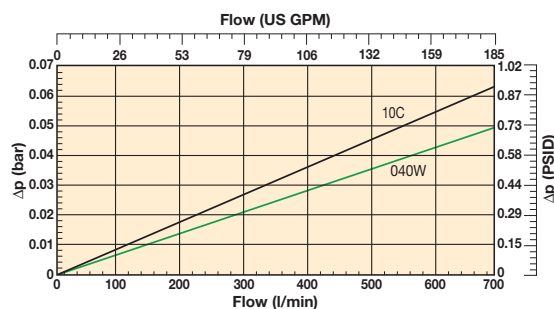


IN800 (Element length code 14)
Cellulose & Stainless steel media

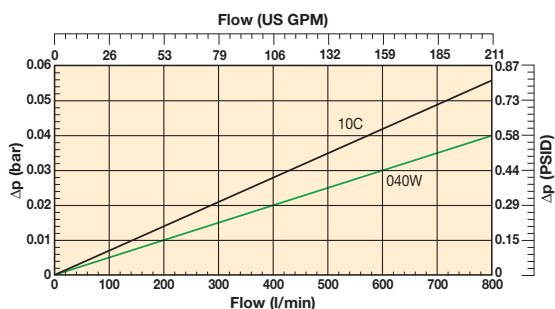


IN1000 (Element length code 15)
Cellulose & Stainless steel media

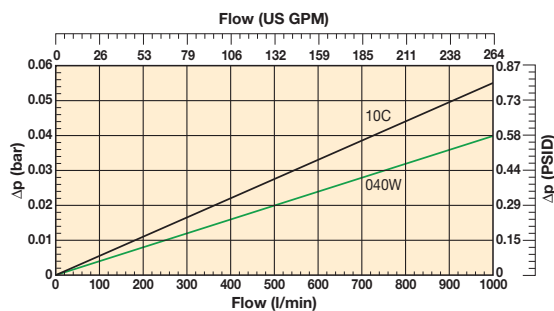

IN1500 (Element length code 16)
Cellulose & Stainless steel media

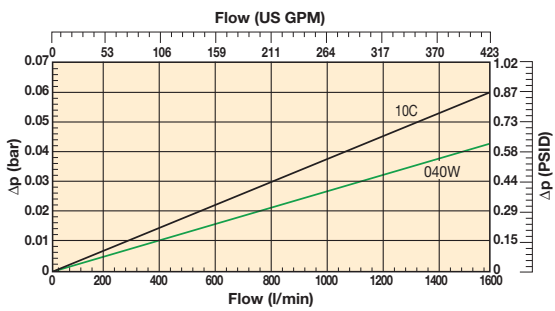

IN2000 (Element length code 17)
Cellulose & Stainless steel media

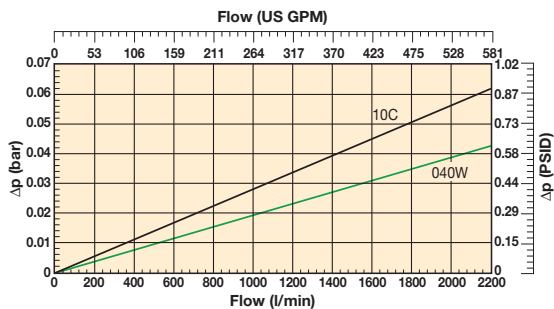

Cellulose and stainless steel media
Example: IN300 Filter Element Length 8 - Cellulose and stainless steel media

Ordering Information

Standard products table

Part number	Supersedes	Flow (l/min)	Model number	Element length	Media rating (µ)	Seals	Indicator	Bypass settings	Ports	Included options	Replacement elements	Supersedes
IN310QLBNEXXX1	IN90-TXWL3-10B15	90	IN90	Length 3	10	Nitrile	NA	1.5 Bar (22 Psi)	NA	None	937878Q	TXWL3-10
IN320QLBNEXXX1	IN90-TXWL3-20 B15	90	IN90	Length 3	20	Nitrile	NA	1.5 Bar (22 Psi)	NA	None	937877Q	TXWL3-20
IN510QLBNEXXX1	IN125-TXWL3E-10 B15	125	IN125	Length 5	10	Nitrile	NA	1.5 Bar (22 Psi)	NA	None	937852Q	TXWL3E-10
IN520QLBNEXXX1	IN125-TXWL3E-20 B15	125	IN125	Length 5	20	Nitrile	NA	1.5 Bar (22 Psi)	NA	None	937875Q	TXWL3E-20
IN610QLBNEXXX1	IN170-TXWL4-10 B15	170	IN170	Length 6	10	Nitrile	NA	1.5 Bar (22 Psi)	NA	None	937853Q	TXWL4-10
IN620QLBNEXXX1	IN170-TXWL4-20 B15	170	IN170	Length 6	20	Nitrile	NA	1.5 Bar (22 Psi)	NA	None	937874Q	TXWL4-20
IN810QLBNEXXX1	IN300-TXWL5A-10 B15	300	IN300	Length 8	10	Nitrile	NA	1.5 Bar (22 Psi)	NA	None	937855Q	TXWL5A-10
IN820QLBNEXXX1	IN300-TXWL5A-20 B15	300	IN300	Length 8	20	Nitrile	NA	1.5 Bar (22 Psi)	NA	None	937872Q	TXWL5A-20
IN1210QLBNEXXX3	IN500-TXWL8C-10 T B15	500	IN500	Length 12	10	Nitrile	NA	1.5 Bar (22 Psi)	NA	Diffuser type T	937859Q	TXWL8C-10
IN1220QLBNEXXX3	IN500-TXWL8C-20 T B15	500	IN500	Length 12	20	Nitrile	NA	1.5 Bar (22 Psi)	NA	Diffuser type T	937868Q	TXWL8C-20
IN1510QLBNEXXX3	IN1000-TXWL12-10 T B15	1000	IN1000	Length 15	10	Nitrile	NA	1.5 Bar (22 Psi)	NA	Diffuser type T	937862Q	TXWL12-10
IN1520QLBNEXXX3	IN1000-TXWL12-20 T B15	1000	IN1000	Length 15	20	Nitrile	NA	1.5 Bar (22 Psi)	NA	Diffuser type T	937865Q	TXWL12-20
IN1710QBNEXXX3	IN2000-TXW14-10-B T B15	2000	IN2000	Length 17	10	Nitrile	NA	1.5 Bar (22 Psi)	NA	Diffuser type T	937772Q	TXW14-10B
IN1720QBNEXXX3	IN2000-TXW14-20-B T B15	2000	IN2000	Length 17	20	Nitrile	NA	1.5 Bar (22 Psi)	NA	Diffuser type T	937805Q	TXW14-20B

Note: Filter assemblies ordered from the product configurator below are on extended lead times. Where possible, please make your selection from the table above.

Product configurator

Configurator example filter including LEIF® element

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
IN	10	05QL	V	N	H	XXX	1

Configurator example filter including conventional element

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
IN	18	20Q	B	N	H	XXX	3

Box 1

Code	Filter Rating																																								
IN	<table><tr><th>Insert IN-AGB</th><th>Code</th></tr><tr><td>IN30</td><td>0</td></tr><tr><td>IN60</td><td>2</td></tr><tr><td>IN90</td><td>3</td></tr><tr><td>IN120</td><td>4</td></tr><tr><td>IN150</td><td>5</td></tr><tr><td>IN170</td><td>6</td></tr><tr><td>IN230</td><td>7</td></tr><tr><td>IN300</td><td>8</td></tr><tr><td>IN400</td><td>9</td></tr><tr><td>IN500</td><td>10</td></tr><tr><td>IN390(3)</td><td>11</td></tr><tr><td>IN270(3)</td><td>11A</td></tr><tr><td>IN500(3)</td><td>12</td></tr><tr><td>IN600</td><td>13</td></tr><tr><td>IN800</td><td>14</td></tr><tr><td>IN1000</td><td>15</td></tr><tr><td>IN1500</td><td>16</td></tr><tr><td>IN2000</td><td>17</td></tr><tr><td>IN2400</td><td>18</td></tr></table>	Insert IN-AGB	Code	IN30	0	IN60	2	IN90	3	IN120	4	IN150	5	IN170	6	IN230	7	IN300	8	IN400	9	IN500	10	IN390(3)	11	IN270(3)	11A	IN500(3)	12	IN600	13	IN800	14	IN1000	15	IN1500	16	IN2000	17	IN2400	18
Insert IN-AGB	Code																																								
IN30	0																																								
IN60	2																																								
IN90	3																																								
IN120	4																																								
IN150	5																																								
IN170	6																																								
IN230	7																																								
IN300	8																																								
IN400	9																																								
IN500	10																																								
IN390(3)	11																																								
IN270(3)	11A																																								
IN500(3)	12																																								
IN600	13																																								
IN800	14																																								
IN1000	15																																								
IN1500	16																																								
IN2000	17																																								
IN2400	18																																								

Box 2

Box 3

Degree of filtration							
Element media		Glass fibre				Wire mesh	
		Microglass III (for disposable elements)					
		Ecoglass III (for Leif® elements)					
		Nom. rating					
Disposable element		10C	02Q	05Q	10Q	20Q	Abs. rating
LEIF® element			02QL	05QL	10QL	20QL	040W

Box 4

Seal type	
Seal material	Code
Nitrile	B
Fluoroelastomer	V
Neoprene	On request

Box 5

Indicator	
	Code
No indicator	N

Box 7

Filter connection	
Ports	Code
No ports applicable	XXX

Box 8

Options	
Options	Code
No diffuser required	1
Diffuser type T with perforated plate area	2
Diffuser type P with perforated plate area	3
No magnets	4
Diffuser type T and no magnets	A
Diffuser type P and no magnets	B
Air tight diffuser type T and no magnets	G
Air tight diffuser type P and no magnets	H

Bypass valve	Code
0.8 bar	B
1.5 bar	E
2.0 bar for IN-AGB (up to length 12)	H
Blocked bypass	X
Other bypass settings	on request

Note: IN-AGB size 2-400 and 2-500 are standard supplied without magnets
Note: Option code 3 only available for series 3 and 4 (Length 11 to 18)

Degree of filtration	Media code
Average filtration beta ratio β (ISO 16889) / particle size µm [c]	
βx(c)=2 βx(c)=10 βx(c)=75 βx(c)=100 βx(c)=200 βx(c)=1000	
% efficiency, based on the above beta ratio (βx)	
50.0% 90.0% 98.7% 99.0% 99.5% 99.9%	
N/A N/A N/A N/A N/A 4.5	02Q/02QL
N/A N/A 4.5 5 6 7	05Q/05QL
N/A 6 8.5 9 10 12	10Q/10QL
6 11 17 18 20 22	20Q/20QL



IN-AGB Series

In-Tank Mounted Return Line Filters

Ordering Information (cont.)

Supersedes spare element table				
IN30	TXWL-2	TXWL-5	TXWL-10	TXWL-20
Part number spare element	937822Q	937885Q	937884Q	937883Q
IN60	TXWL2-2	TXWL2-5	TXWL2-10	TXWL2-20
Part number spare element	937823Q	937880Q	937881Q	937882Q
IN90	TXWL3-2	TXWL3-5	TXWL3-10	TXWL3-20
Part number spare element	937824Q	937879Q	937878Q	937877Q
IN120	TXWL3D-2	TXWL3D-5	TXWL3D-10	TXWL3D-20
Part number spare element	937825Q	937850Q	937851Q	937876Q
IN125	TXWL3E-2	TXWL3E-5	TXWL3E-10	TXWL3E-20
Part number spare element	937826Q	937849Q	937852Q	937875Q
IN170	TXWL4-2	TXWL4-5	TXWL4-10	TXWL4-20
Part number spare element	937827Q	937848Q	937853Q	937874Q
IN230	TXWL5-2	TXWL5-5	TXWL5-10	TXWL5-20
Part number spare element	937828Q	937847Q	937854Q	937873Q
IN300	TXWL5A-2	TXWL5A-5	TXWL5A-10	TXWL5A-20
Part number spare element	937829Q	937846Q	937855Q	937872Q
IN400	TXWL5B-2	TXWL5B-5	TXWL5B-10	TXWL5B-20
Part number spare element	937830Q	937845Q	937856Q	937871Q
IN500	TXWL5C-2	TXWL5C-5	TXWL5C-10	TXWL5C-20
Part number spare element	937831Q	937844Q	937857Q	937870Q
IN390	TXWL8A-2	TXWL8A-5	TXWL8A-10	TXWL8A-20
Part number spare element	937832Q	937843Q	937858Q	937869Q
IN500	TXWL8C-2	TXWL8C-5	TXWL8C-10	TXWL8C-20
Part number spare element	937833Q	937842Q	937859Q	937868Q
IN600	TXWL10-2	TXWL10-5	TXWL10-10	TXWL10-20
Part number spare element	937834Q	937841Q	937860Q	937867Q
IN800	TXWL11-2	TXWL11-5	TXWL11-10	TXWL11-20
Part number spare element	937835Q	937840Q	937861Q	937866Q
IN1000	TXWL12-2	TXWL12-5	TXWL12-10	TXWL12-20
Part number spare element	937836Q	937839Q	937862Q	937865Q
IN1500	TXWL13-2	TXWL13-5	TXWL13-10	TXWL13-20
Part number spare element	937837Q	937838Q	937863Q	937864Q

IN-AGB Series Seal Kits	
Part Number	Description
2049010003	NITRILE SEAL KIT IN 0 - 5
2049010045	FLUOROELASTOMER SEAL KIT IN 0 - 5
2049010004	NITRILE SEAL KIT IN 6 - 10
2049010028	FLUOROELASTOMER SEAL KIT IN 6 - 10
2049010005	NITRILE SEAL KIT IN 11 and 12
2049010021	NITRILE SEAL KIT (FUNNEL) IN 11 and 12
2049010059	FLUOROELASTOMER SEAL KIT IN 11 and 12
2049010029	FLUOROELASTOMER SEAL (FUNNEL) KIT IN 11 and 12
2049010006	NITRILE SEAL KIT IN 13 - 18
2049010022	NITRILE SEAL KIT (FUNNEL) IN 13 - 18
2049010030	FLUOROELASTOMER SEAL KIT IN 13 - 18

Supersedes spare element table						
IN30	TXX-10-B	TXW-2-B	TXW-5-B	TXW-10-B	TXW-20-B	ST-40-B
Part number spare element	937720	937752Q	937753Q	937788Q	937789Q	937821
IN60	TXX2-10-B	TXW2-2-B	TXW2-5-B	TXW2-10-B	TXW2-20-B	ST2-40-B
Part number spare element	937721	937751Q	937754Q	937787Q	937790Q	937820
IN90	TXX3-10-B	TXW3-2-B	TXW3-5-B	TXW3-10-B	TXW3-20-B	ST3-40-B
Part number spare element	937722	937750Q	937755Q	937786Q	937791Q	937819
IN120	TXX3D-10-B	TXW3D-2-B	TXW3D-5-B	TXW3D-10-B	TXW3D-20-B	ST3D-40-B
Part number spare element	937723	937749Q	937756Q	937785Q	937792Q	937818
IN125	TXX3E-10-B	TXW3E-2-B	TXW3E-5-B	TXW3E-10-B	TXW3E-20-B	ST3E-40-B
Part number spare element	937724	937748Q	937757Q	937784Q	937793Q	937817
IN170	TXX4-10-B	TXW4-2-B	TXW4-5-B	TXW4-10-B	TXW4-20-B	ST4-40-B
Part number spare element	937725	937747Q	937758Q	937783Q	937794Q	937816
IN230	TXX5-10-B	TXW5-2-B	TXW5-5-B	TXW5-10-B	TXW5-20-B	ST5-40-B
Part number spare element	937726	937746Q	937759Q	937782Q	937795Q	937815
IN300	TXX5A-10-B	TXW5A-2-B	TXW5A-5-B	TXW5A-10-B	TXW5A-20-B	ST5A-40-B
Part number spare element	937727	937745Q	937760Q	937781Q	937796Q	937814
IN390	TXX8A-10-B	TXW8A-2-B	TXW8A-5-B	TXW8A-10-B	TXW8A-20-B	ST8A-40-B
Part number spare element	937728	937742Q	937763Q	937778Q	937799Q	937813
IN500 (3 series)	TXX8C-10-B	TXW8C-2-B	TXW8C-5-B	TXW8C-10-B	TXW8C-20-B	ST8C-40-B
Part number spare element	937729	937741Q	937764Q	937777Q	937800Q	937812
IN600	TXX10-10-B	TXW10-2-B	TXW10-5-B	TXW10-10-B	TXW10-20-B	ST10-40-B
Part number spare element	937730	937740Q	937765Q	937776Q	937801Q	937811
IN800	TXX11-10-B	TXW11-2-B	TXW11-5-B	TXW11-10-B	TXW11-20-B	ST11-40-B
Part number spare element	937731	937739Q	937766Q	937775Q	937802Q	937810
IN1000	TXX12-10-B	TXW12-2-B	TXW12-5-B	TXW12-10-B	TXW12-20-B	ST12-40-B
Part number spare element	937732	937738Q	937767Q	937774Q	937803Q	937809
IN1500	TXX13-R-10-B	TXW13-R-2-B	TXW13-R-5-B	TXW13-R-10-B	TXW13-R-20-B	ST13-40-B
Part number spare element	937733	937737Q	937768Q	937773Q	937804Q	937808
IN2000	TXX14-10-B	TXW14-2-B	TXW14-5-B	TXW14-10-B	TXW14-20-B	ST14-20
Part number spare element	937734	937736Q	937769Q	937772Q	937805Q	937807
IN2400	-	TXWH14-2-B	TXWH14-5-B	TXWH14-10-B	TXWH14-20-B	-
Part number spare element		937735Q	937770Q	937771Q	937806Q	

Tanktopper Series I, II & III

Tanktop Mounted Return Line Filters
with Integrated Air Breather
Max. 650 l/min - 10 bar



When an all-in-one solution matters

Reduction of reservoir accessories

The Tanktopper Series features an integrated, 10 micron Abs. air breather. Maximum pressure 10 bar. Maximum flow 650 l/min. LEIF® elements available. An all-in-one, easy-to-mount filter range for more compact tank design.



Contact Information: Product Features:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)
filtrationinfo@parker.com

www.parkerhfde.com

- Tanktopper offers a total filtration solution with integrated air breather.
- In-to-Out filtration plus gauge and switch options.
- Maximum pressure 10 bar. Maximum flow 650 l/min.
- Patented LEIF® elements safeguard filtration quality.

Tanktopper Series I, II & III

Tanktop Mounted Return Line Filters with Integrated Air Breather

Features & Benefits

Features	Advantages	Benefits
Return line filter with Integrated airbreather	All in one filter	More compact design, cost reduction due to elimination of loose airbreather
Airbreather equipped with high quality labyrinth	No oil leakage through the airbreather	Improved efficiency of airbreather No oil leakage on the tank / in the environment
Second port and dipstick available	Filler port and level indicator function can be integrated in filter	Significant reduction of reservoir accessories
Airbreather element always supplied with spare return line filter elements	Both filter elements can be replaced during the service event	Improved protection of system due to change of airbreather element
LEIF® elements	Patented element safeguards the use of genuine parts	Guaranteed quality of filtration Contributes to ISO 14001 certification
Magnetic pre-filtration	Removes ferrous particles, even during bypass conditions	Improved fluid cleanliness levels Extended element life time
In-to-Out filtration	All captured contamination retains inside the element	No recontamination of system during change of elements
Full flow bypass with low hysteresis	Reduction of bypass period due to low hysteresis Only a small part of the total flow is bypassing the element	Improved protection of system
Standard or customised funnel	Ensures that oil enters the tank under the oil level	Significant reduction of oil foaming

Typical Applications

TPR I

- Fork lift trucks
- Power packs
- Mini excavator

TPR II

- Gully-sucker
- Power packs
- Dredging ships

TPR III

- Mobile cranes
- Refuse vehicles

The Parker Filtration Tanktopper Series I, II & III Tanktop Mounted Return Line Filters.

The TPR Series I, II & III offer a total filtration solution. A 10-micron Abs. air breather that is integrated into the filter housing, a magnet column for pre-filtration, 'In-to-Out' filtration, a full-flow bypass with low hysteresis, and the high performance Q3 filter element materials are all proven success factors in efficient return-line filtration for flow rates up to 650 l/min. Several pressure gauges and switches can be applied, combined or not with a dipstick. The all-in-one, easy-to-mount cost-saving TPR solution allows for a more compact tank design.



Specification

Operation pressure:

Max. 10 bar.

Assembly:

Tank top mounted.

Connections:

Threaded BSP or SAE ports.

Second return port available for Tanktopper II and Tanktopper III.

Filter housing:

Aluminium head and co-polymer cover.

Seal material:

Nitrile, Fluoroelastomer.

Operation temperature range:

-40 to +80°C.

Bypass setting:

Opening pressure 0.8, 1.5 or 2.5 bar for Tanktopper I.

Opening pressure 1.5 bar for Tanktopper II and III.

Degree of filtration:

Determined by multipass test according to ISO 16889.

Flow fatigue characteristics:

Filter media is supported so that the optimum fatigue life is achieved.

Filtration media:

Microglass III, Ecoglass III for *LEIF*® element. Air breather 10 micron Abs. Also available 10µm Cellulose and 40µm stainless steel mesh. (TPR1)

Element collapse rating:

10 bar (ISO 2941).

Pressure indicator options:

Setting 0.7 or 1.2 bar.

Other settings on request.

Visual pressure gauge.

Electrical pressure switch.

Options:

Dipstick

Second port (only for TPR II and III)

Magnetic pack:

Optional for Tanktopper I.

Standard for Tanktopper II and III.

Filter element:



LEIF® element with reusable metal element sleeve.

Conventional style element with steel end caps only optional for Tanktopper I. The *LEIF*® element is patented and safeguards the use of genuine parts.

Note: *LEIF*® element can be used with mineral and HEES type oils. For other fluids consult Parker Filtration.

LEIF® contributes to ISO 14001 quality standards

Tanktopper I (length 1 and 2)

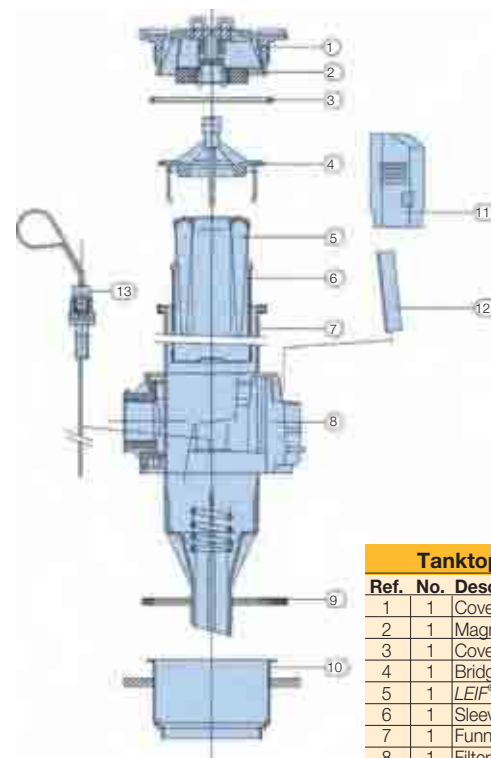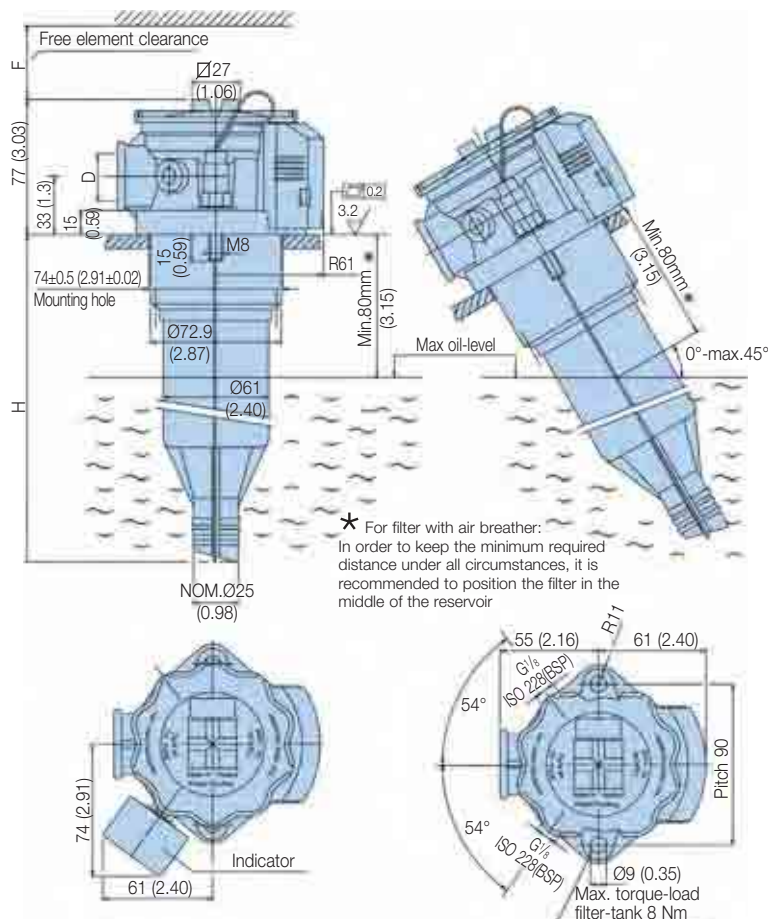

Length		H	F	D
1	TPR1-40	169 (6.65)	160 (6.30)	G ³ / ₄ (BSP)
2	TPR1-80	269 (10.60)	260 (10.23)	SAE 12

Dimensions in mm

Tanktopper I		
Ref.	No.	Description
1	1	Cover
2	1	Magnet-set
3	1	Cover-seal
4	1	Bridge (blue)
5	1	<i>LEIF</i> ® Element
6	1	Sleeve
7	1	Funnel-assembly
8	1	Filter-housing
9	1	Housing-seal
10	1	Airguide
11	1	Cover airbreather
12	1	Breather-element
13	1	Dipstick assembly




Tanktopper Series I, II & III



Tanktop Mounted Return Line Filters with Integrated Air Breather

Specification (cont.)


Tanktopper II (length 5, 6 and 7)

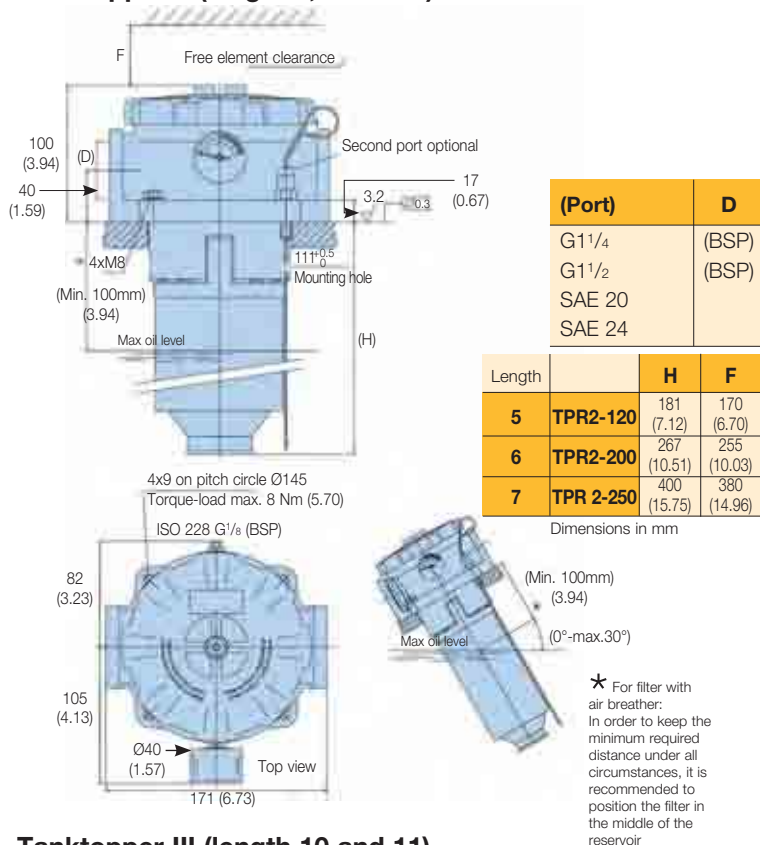

Tanktopper III (length 10 and 11)

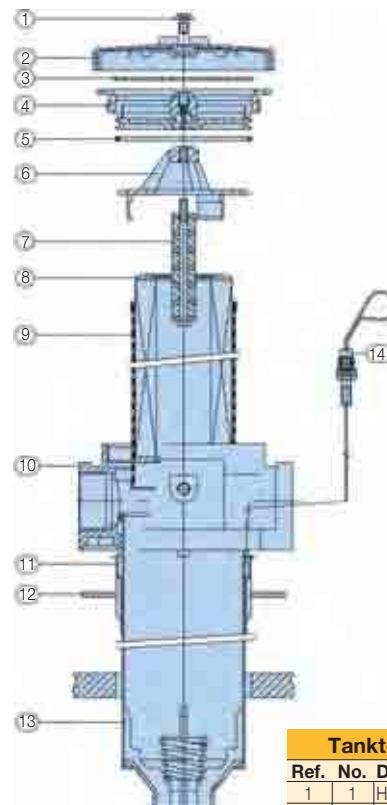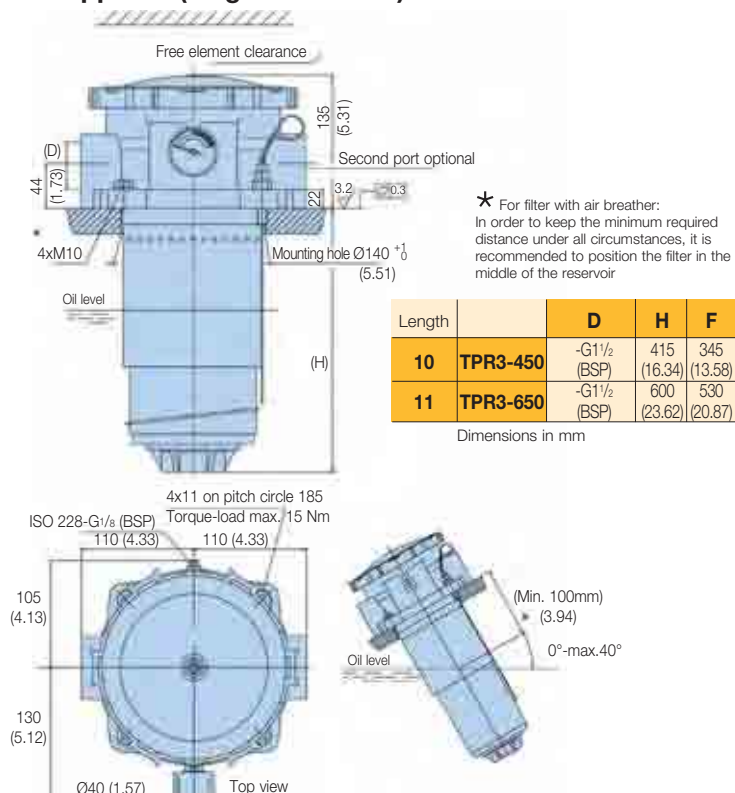

Tanktopper II & III		
Ref. No.	Description	
1	1	Hexagon socket bolt M8
2	1	Air breather cap
3	1	Air breather filter medium
4	1	Cover (assembly)
5	1	Cover seal
6	1	Bridge
7	1	Magnet set
8	1	Element
9	1	Sleeve
10	1	Filter house
11	1	Airguide
12	1	Tank gasket
13	1	Funnel
14	1	Dipstick assembly

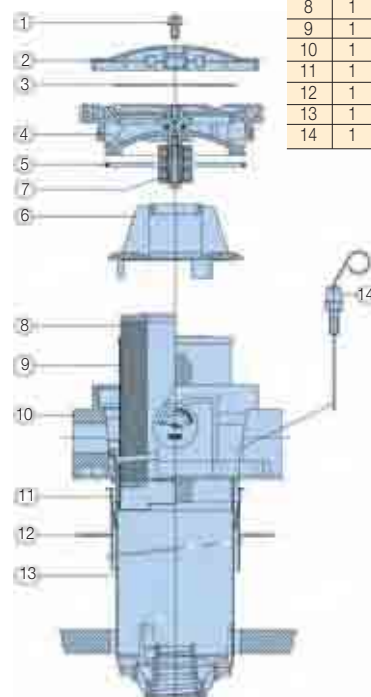


Tanktopper Series I & II

Tanktop Mounted Return Line Filters
with Integrated Air Breather


Pressure Drop Curves - Tanktopper I

Filter housing and element pressure drop based on 32cSt fluid viscosity and 0.87 density.


TPR40 Empty Housing (Length code 1)

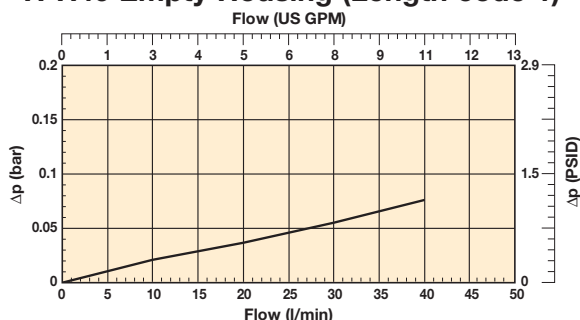


TPR80 Empty Housing (Length code 2)

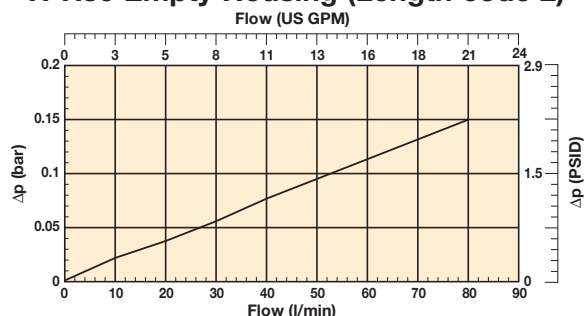


TPR40 (Element length code 1)

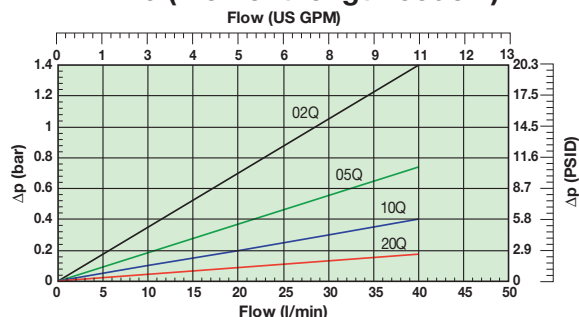


TPR80 (Element length code 2)

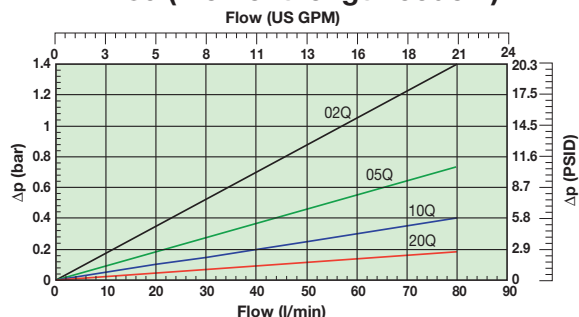

**TPR40 (Element length code 1)
(cellulose and stainless steel)**

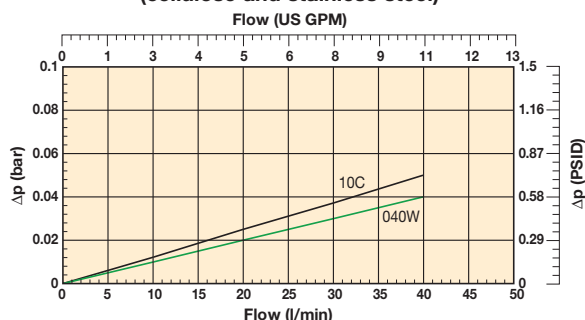


**TPR80 (Element length code 2)
(cellulose and stainless steel)**

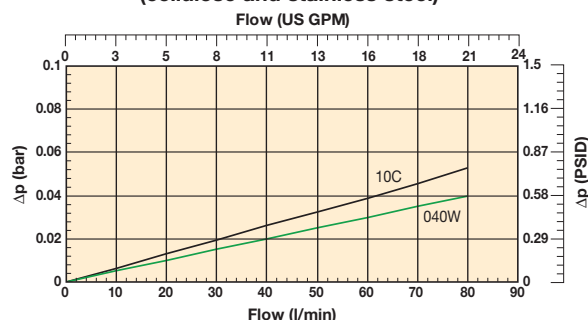


Pressure Drop Curves - Tanktopper II

Filter housing and element pressure drop based on 32cSt fluid viscosity and 0.87 density.

**TPR II Empty Housing with G1¹/₄" ports
(Length code 5, 6 and 7)**

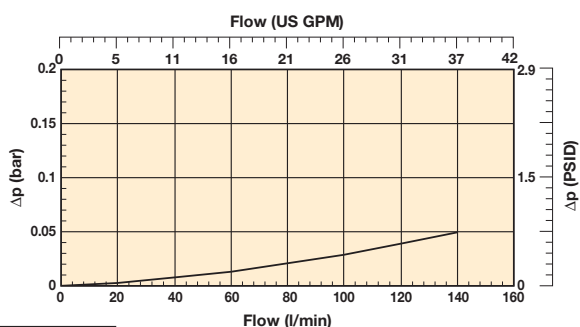

**TPR II Empty Housing with G1¹/₂" ports
(Length code 5, 6 and 7)**

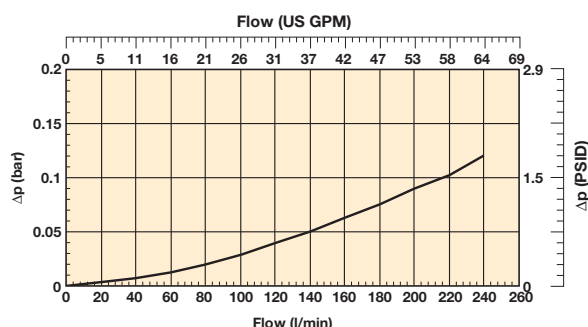


Tanktopper Series II & III

Tanktop Mounted Return Line Filters with Integrated Air Breather


Pressure Drop Curves - Tanktopper II (cont.)

Filter housing and element pressure drop based on 32cSt fluid viscosity and 0.87 density.


TPR120 (Element length code 5)

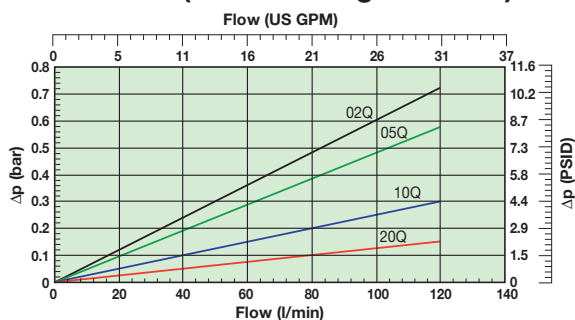

TPR200 (Element length code 6)

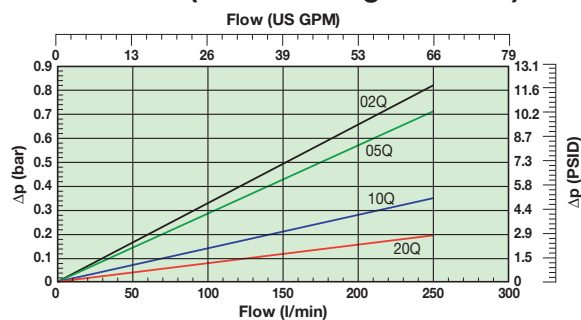


TPR250 (Element length code 7)

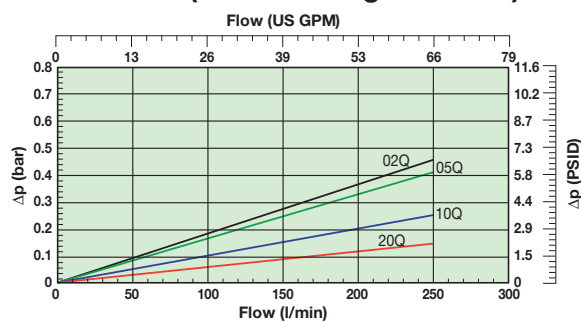


Pressure Drop Curves - Tanktopper III

Filter housing and element pressure drop based on 32cSt fluid viscosity and 0.87 density.


**TPR III Empty Housing with G1½" ports
(Length code 10 and 11)**

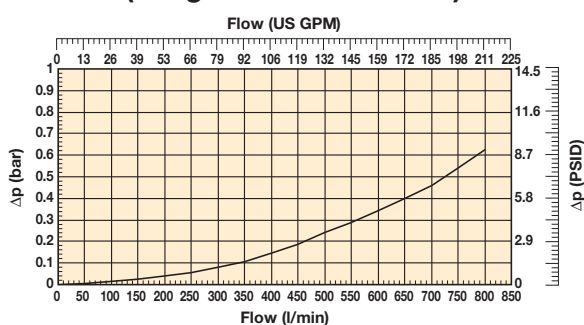

TPR450 (Element length code 10)

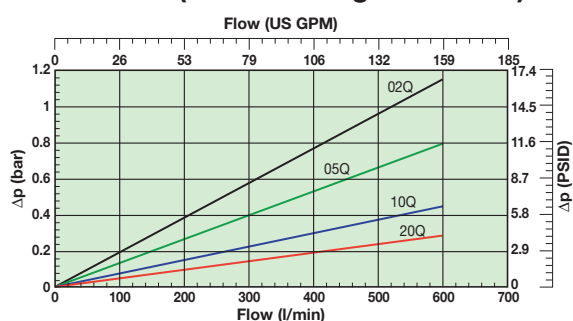

TPR650 (Element length code 11)

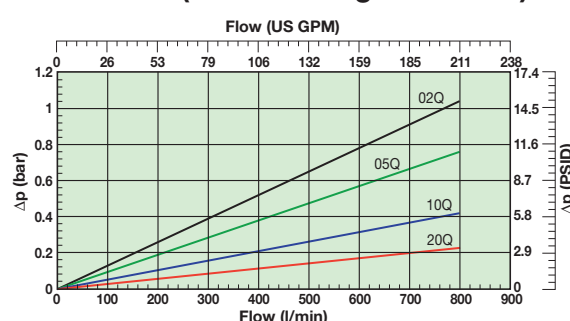

Tanktopper Series I, II & III

Tanktop Mounted Return Line Filters with Integrated Air Breather

Ordering Information

Standard products table


Part number	Supersedes	Flow (l/min)	Model number	Element length	Media rating (μ)	Seals	Indicator	Bypass settings	Ports	Included options	Replacement elements	Supersedes
TPR110QLBP2EG12E	TPR40-G ¹ / ₄ PXWL1-10 B15 MM MA	40	TPR40	Length 1	10	Nitrile	Plugged	1.5 Bar (22 Psi)	G ¹ / ₄	Magnets	937902Q	PXWL1-10
TPR120QLBP2EG12E	TPR40-G ¹ / ₄ PXWL1-20 B15 MM MA	40	TPR40	Length 1	20	Nitrile	Plugged	1.5 Bar (22 Psi)	G ¹ / ₄	Magnets	937904Q	PXWL1-20
TPR210QLBP2EG12L	TPR80-G ¹ / ₄ PXWL2-10 AB15 MM MA	80	TPR80	Length 2	10	Nitrile	Plugged	1.5 Bar (22 Psi)	G ¹ / ₄	Aluminium funnel, magnets	937903Q	PXWL2-10
TPR220QLBP2EG12L	TPR80-G ¹ / ₄ PXWL2-20 AB15 MM MA	80	TPR80	Length 2	20	Nitrile	Plugged	1.5 Bar (22 Psi)	G ¹ / ₄	Aluminium funnel, magnets	937905Q	PXWL2-20
TPR510QLBP2EG201	TPR120-2G1 ¹ / ₂ PXWL3-10 B15 MM	120	TPR120	Length 5	10	Nitrile	Plugged	1.5 Bar (22 Psi)	2xG1 ¹ / ₂	None	937892Q	PXWL3-10
TPR520QLBP2EG201	TPR120-2G1 ¹ / ₂ PXWL3-20 B15 MM	120	TPR120	Length 5	20	Nitrile	Plugged	1.5 Bar (22 Psi)	2xG1 ¹ / ₂	None	937895Q	PXWL3-20
TPR710QLBP2EG241	TPR250-2G1 ¹ / ₂ PXWL4A-10 B15 MM	250	TPR250	Length 7	10	Nitrile	Plugged	1.5 Bar (22 Psi)	2xG1 ¹ / ₂	None	937894Q	PXWL4A-10
TPR720QLBP2EG241	TPR250-2G1 ¹ / ₂ PXWL4A-20 B15 MM	250	TPR250	Length 7	20	Nitrile	Plugged	1.5 Bar (22 Psi)	2xG1 ¹ / ₂	None	937897Q	PXWL4A-20
TPR1110QLBP2EG241	TPR650-2G1 ¹ / ₂ PXWL8-10 B15 MM	650	TPR650	Length 11	10	Nitrile	Plugged	1.5 Bar (22 Psi)	2xG1 ¹ / ₂	None	937914Q	PXWL8-10
TPR1120QLBP2EG241	TPR650-2G1 ¹ / ₂ PXWL8-20 B15 MM	650	TPR650	Length 11	20	Nitrile	Plugged	1.5 Bar (22 Psi)	2xG1 ¹ / ₂	None	937917Q	PXWL8-20

Note: Filter assemblies ordered from the product configurator below are on extended lead times. Where possible, please make your selection from the table above.


Visual indicator	
Thread connection	G ¹ / ₈
Code	FMUG2EBPG02L

Specifications	
Elec.rating	42V / 2A
Thread connection	G ¹ / ₈
Elec.connection	AMP terminal 6.3x0.8
Protection	IP65 (terminal IP00)
Switch type	NO or NC
Code	FMUS2EBMG02L (NO switch)
	FMUS3EBMG02L (NC switch)

Normally open contacts



Normally closed contacts



Product configurator

Configurator example TPR filter

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
TPR	2	05QL	B	S2	I	G12	L

Box 1

Code
TPR

Box 2

Filter type	
Housing	Code
TPR 1-40	1
TPR 1-80	2
TPR 2-120	5
TPR 2-200	6
TPR 2-250	7
TPR 3-450	10
TPR 3-650	11

Box 3

Degree of filtration						
Element media	Glass fibre					Wire mesh
	Microglass III (for disposable elements)					
	Ecoglass III (for Leif® elements)					
	Cellulose					
	Nom. rating					Abs. rating
Disposable element (TPR I only)	10C	02Q	05Q	10Q	20Q	040W
LEIF® element (for all TPR Filters)		02QL	05QL	10QL	20QL	

Seal type	
Seal material	Code
Nitrile	B
Fluoroelastomer	on request

Indicator	
Pressure gauge, setting 1.2 bar, G ¹ / ₈	G2
Pressure switch 42V, 1.2 bar setting, NO with G ¹ / ₈	S2
Pressure switch 42V, 1.2 bar setting, NC with G ¹ / ₈	S3
Pressure switch 250V, NO/NC with G ¹ / ₈	S4
No indicator, indicator ports not machined	on request
No indicator, indicator port R plugged	on request
No indicator, indicator ports L + R plugged	P2
Other settings for indicators / gauges on request	on request

Bypass valve	
Bypass valve	Code
0.8 bar	B
1.5 bar	E
2.5 bar (TPR 1 Series only)	on request
Other bypass settings	on request

Note 1: Part numbers featured with bold highlighted codes will ensure a 'standard' product selection.
Note 2: Alternate displayed part number selection will require you to contact Parker Filtration for availability.

Filter connection	
Ports	Code
G ¹ / ₄ (BSP) (TPR 1 Series)	G12
SAE12 (TPR 1 Series)	S12
G1 ¹ / ₂ (BSP) (TPR 2 Series)	G20
2 x ISO 228-G1 ¹ / ₂ (BSP) (TPR 2 Series)	2G20
SAE 20 (TPR 2 Series)	S20
2 x SAE 20 (TPR 2 Series)	2S20
SAE 24 (TPR 2 Series)	S24
2 x SAE 24 (TPR 2 Series)	2S24
G1 ¹ / ₂ (BSP) (TPR 2 and 3 Series)	G24
2 x G1 ¹ / ₂ (BSP) (TPR 2 and 3 Series)	2G24

Options	
Options	Code
Standard	1
Dipstick	6
Aluminium funnel for TPR 1-80	J
Magnets for TPR 1 Series	E
Magnets + Dipstick for TPR 1 Series	K
Magnets + Aluminium Funnel for TPR 80 Series	L
Magnets + Aluminium Funnel + Dipstick for TPR 80 Series	M
Other combinations	on request

Note: Tanktopper I Series are standard supplied with POM type diffuser.
Aluminium funnel is recommended for heavy duty applications, sensitivity for electrostatically charging or high fluid temperatures.
Tanktopper II and III Series are always supplied with metal diffuser.

Highlights Key (Denotes part number availability)

123	Item is standard
123	Item is standard green option
123	Item is semi standard
123	Item is non standard

Note: Standard items are in stock, semi standard items are available within four weeks



Parker Hannifin
Hydraulic Filter Division Europe
FDHB500UK.

Tanktopper Series I, II & III

Tanktop Mounted Return Line Filters with Integrated Air Breather

Ordering Information (cont.)

Degree of filtration						Media code
Average filtration beta ratio β (ISO 16889) / particle size μm [c]						
$\beta x(c)=2$	$\beta x(c)=10$	$\beta x(c)=75$	$\beta x(c)=100$	$\beta x(c)=200$	$\beta x(c)=1000$	
% efficiency, based on the above beta ratio (βx)						
50.0%	90.0%	98.7%	99.0%	99.5%	99.9%	
N/A	N/A	N/A	N/A	N/A	4.5	02Q/02QL
N/A	N/A	4.5	5	6	7	05Q/05QL
N/A	6	8.5	9	10	12	10Q/10QL
6	11	17	18	20	22	20Q/20QL

Supersedes spare element table				
TPR 1-40	PXWL1-2	PXWL1-5	PXWL1-10	PXWL1-20
Part number spare element	937898Q	937900Q	937902Q	937904Q
TPR 1-80	PXWL2-2	PXWL2-5	PXWL2-10	PXWL2-20
Part number spare element	937899Q	937901Q	937903Q	937905Q
TPR 2-120	PXWL3-2	PXWL3-5	PXWL3-10	PXWL3-20
Part number spare element	937886Q	937889Q	937892Q	937895Q
TPR 2-200	PXWL4-2	PXWL4-5	PXWL4-10	PXWL4-20
Part number spare element	937887Q	937890Q	937893Q	937896Q
TPR 2-250	PXWL4A-2	PXWL4A-5	PXWL4A-10	PXWL4A-20
Part number spare element	937888Q	937891Q	937894Q	937897Q
TPR 3-250	PXWL6-2	PXWL6-5	PXWL6-10	PXWL6-20
Part number spare element	937906Q	937909Q	937912Q	937915Q
TPR 3-450	PXWL7-2	PXWL7-5	PXWL7-10	PXWL7-20
Part number spare element	937907Q	937910Q	937913Q	937916Q
TPR 3-650	PXWL8-2	PXWL8-5	PXWL8-10	PXWL8-20
Part number spare element	937908Q	937911Q	937914Q	937917Q

Supersedes spare element table						
TPR 1-40	PXX1A-10	PXW1A-2	PXW1A-5	PXW1A-10	PXW1A-20	PS1A-40
Part number spare element	937918	937920Q	937925Q	937930Q	937935Q	937940
TPR 1-80	PXX2A-10	PXW2A-2	PXW2A-5	PXW2A-10	PXW2A-20	PS2A-40
Part number spare element	937919	937921Q	937926Q	937931Q	937936Q	937941
TPR 3-160		PXW5-2	PXW5-5	PXW5-10	PXW5-20	
Part number spare element		937922Q	937927Q	937932Q	937937Q	
TPR 3-250		PXW6-2	PXW6-5	PXW6-10	PXW6-20	
Part number spare element		937923Q	937928Q	937933Q	937938Q	
TPR 3-450		PXW7-2	PXW7-5	PXW7-10	PXW7-20	
Part number spare element		937924Q	937929Q	937934Q	937939Q	

Tank Topper Series Seal Kits	
Part Number	Description
2049010052	NITRILE SEAL KIT TPR1 AG FUNNEL ALU
2049010050	NITRILE SEAL KIT TPR1 AG FUNNEL POM
2049010053	NITRILE SEAL KIT TPR1 NO AG FUNNEL ALU
2049010051	NITRILE SEAL KIT TPR1 NO AG FUNNEL POM
2049010056	NITRILE SEAL KIT TPR2 B
2049010027	NITRILE SEAL KIT TPR3 B
	AG = Air Guide

Suction Return Series

Tanktop Mounted Suction & Return Line
Filters - Types SR1 & SR2

Max. 250 l/min - 10 bar



**Filters both open
and closed loop oil
circuits through one
filter**

**Reduced risk of pump
cavitation**

SR1 and SR2 are capable of feeding filtered oil under positive pressure to the suction side of the boost pump filtering both open and closed loop oil systems through one filter. Maximum pressure 10 bar. Maximum flow 250 l/min. Use LEIF® environmentally friendly elements.



Contact Information: Product Features:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)
filtrationinfo@parker.com

www.parkerhfde.com

- SR capable of feeding filtered oil under positive pressure to the suction side of the boost pump.
- Filters both open and closed loop oil systems through one filter.
- Maximum pressure 10 bar. Maximum flow 250 l/min.
- SR uses patented LEIF® elements to safeguard filtration quality.

Suction Return Series

Tanktop Mounted Suction & Return Line Filters - Types SR1 & SR2

Features & Benefits

Features	Advantages	Benefits
Compact design	Less space required to apply SR Series	Improved flexibility during system design
Bypass valve mounted in series with back-pressure valve	Pressurisation of filtered oil for hydrostatic drive ensured during bypass	Lower risk of pump cavitation
LEIF® elements	Patented element safeguards the use of genuine parts	No direct bypass in the tank reducing the additional risk of oil foaming
Strainer located in filter head	Strainer filters all bypass fluid by using a system-matched degree of filtration	Guaranteed quality of filtration
High level of customisation	Dedicated system-matched solutions can be easily made available	Contributes to ISO 14001 certification
Quick response bypass with low hysteresis	Reduction of bypass period due to low hysteresis	Improved protection of system
	Only a small part of the total flow is bypassing the element	Strainer can be inspected and cleaned during service events
Standard or customised funnel	Ensures that oil enters the tank under the oil level	Improved integration of filter in system combined with lower initial system costs
Multiple ports availability	Flexibility related to suction- and return line hose(s) arrangement	Improved protection of system
		Significant reduction of oil foaming
		More compact solutions can be realised
		The use of manifold blocks can be avoided
		Easy to integrate with cooler circuit


Typical Applications

Mobile equipment with both open and closed hydraulic circuits. For example:

- Road sweepers
- Road rollers
- Fork lift trucks
- Loading shovels
- Telescopic handlers
- Dump trucks
- Skid steers
- Agricultural harvesting machines
- Mini excavators

The Parker Filtration Tank Top Mounted Suction & Return Line Filters.

A tank top mounted return filter capable of feeding filtered oil under positive pressure to the suction side of the boost pump, thereby filtering both open and closed loop oil systems through one filter. The Parker SR filters use the patented LEIF® element for environmental-friendly filtration and offers protection against the use of pirate elements. Several options including integrated suction strainer and dipstick are available.

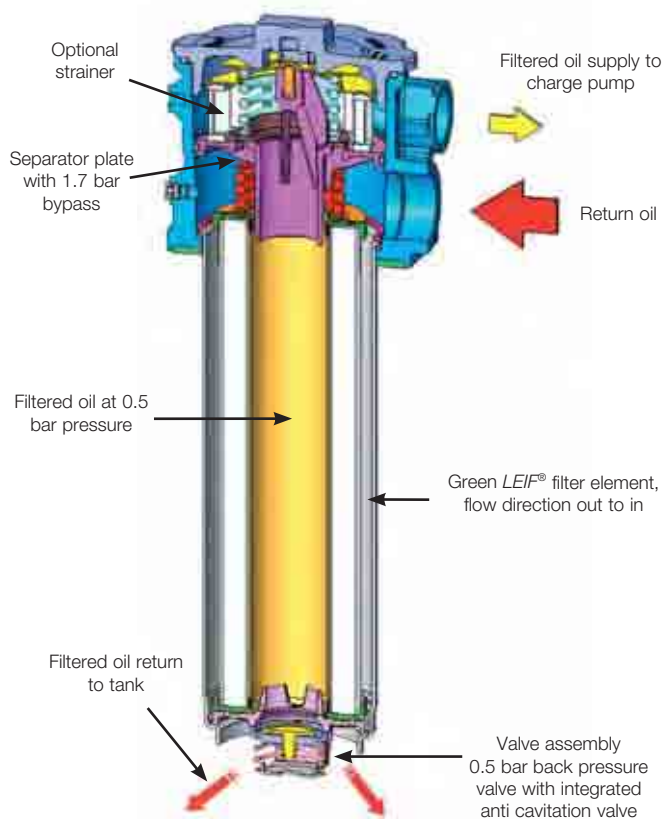

Specification

Pressure ratings:

Max. 10 bar.

Assembly:

Tank top mounted filters.

Connections:

Return port G1 (to BS 2779).

Suction port G³/₄ (to BS 2779).

} SR1

Return port G1¹/₄ (ISO 228) or SAE20:

Optional second return port type SR2.

Suction port G1 (ISO 228) or SAE16:

Standard two suction ports.

} SR2

Seal material:

Type SR1 – Nitrile.

Type SR2 – Nitrile, Fluoroelastomer.

Other seal material on request.

Operating temperature range:

-30° to +110°C.

Bypass valve system:

Main system bypass valve.

Type SR1 – 1.7 bar (2.5 bar optional).

Type SR2 – 1.7 bar (2.5 bar optional).

Degree of filtration:

Determined by multipass test according to ISO 16889.

Flow fatigue characteristics:

Filter media designed to optimise fatigue life.

Filtration media:

Type SR1 and SR2 –

Ecoglass III for *LEIF*® elements. See 'degree of filtration' table on the Ordering Information page.

- High dirt holding capacity.

- Low pressure drop.

- Extended service life.

Element collapse rating:

Type SR1 – 10 bar (ISO2941).

Type SR2 – 10 bar (ISO2941).

Suction line:

Back-pressure valve setting 0.5 bar (nominal).

Anti-cavitation:

Emergency suction valve fitted as standard.

Construction:

Type SR1 and Type SR2

Filter Housing: Precision pressure die casting

Cover:

Glass reinforced nylon (high impact and temperature resistant)

Weight:

1.4Kg 3.3Kg

Filter element:

LEIF® element with reusable metal element sleeve.


The patented *LEIF*® concept contributes to ISO14001

and can be applied with mineral and HEES type fluids.

For other fluid types consult Parker Filtration.


} SR1 & SR2

Circuit Application Example

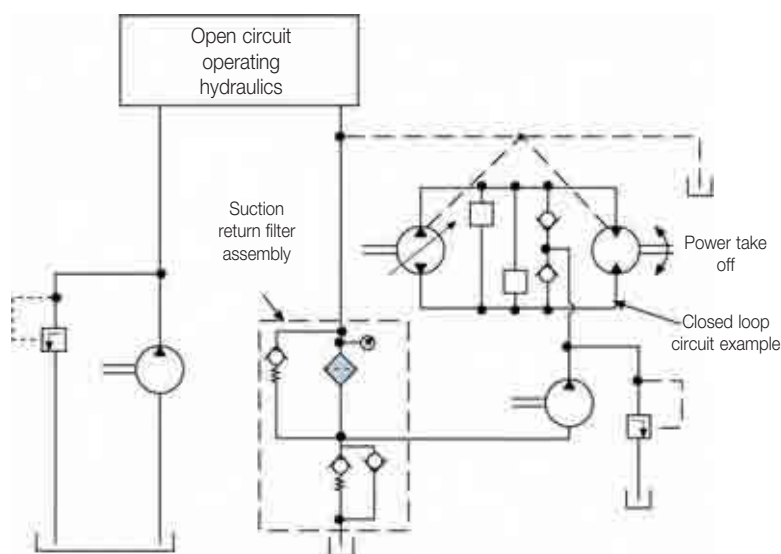

Note: Suction return filter without optional strainer.

Suction Return Filter: Hydraulic Circuit


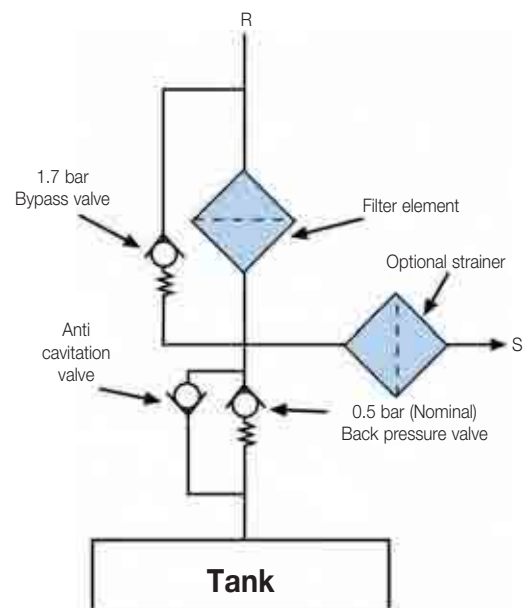


Note: Suction return filter with optional strainer.



Suction Return Series

Tanktop Mounted Suction & Return Line
Filters - Types SR1 & SR2

SR1

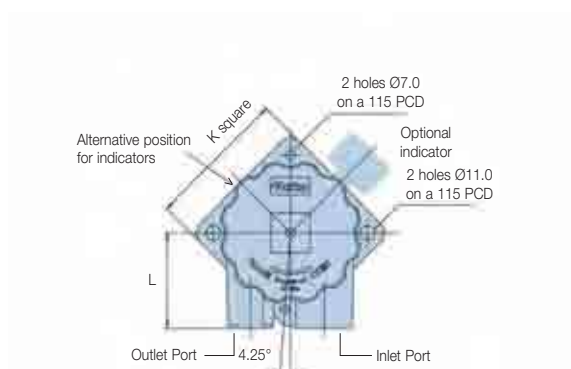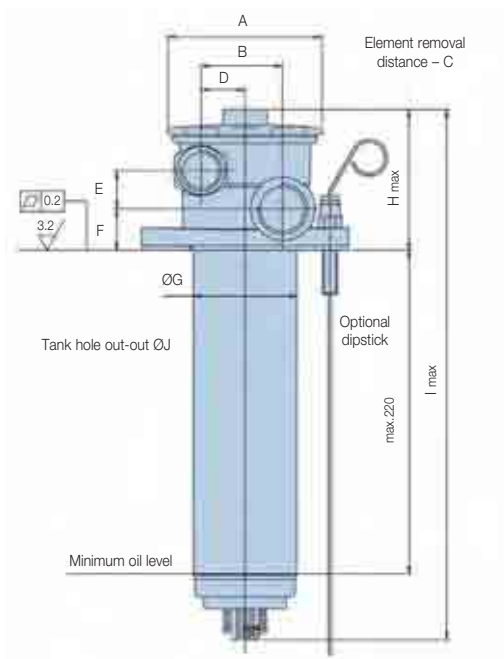

SR2

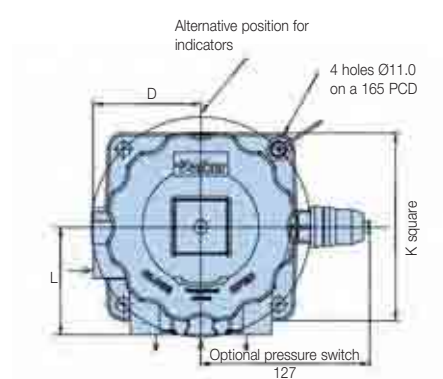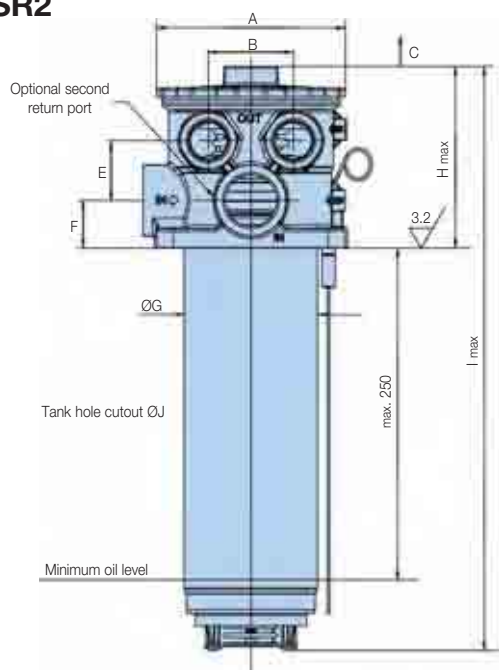


Dimensions mm (inches)	A	B	C	D	E	F	G	H	I	J	K	L
Type SRL1	106 (4.17)	55 (2.17)	280 (11.0)	29.75 (1.17)	26 (1.02)	28 (1.10)	70 (2.76)	96 (3.78)	361 (14.21)	71 to 73 (2.8 to 2.87)	105 (4.13)	72 (2.83)
Type SRL2	142 (5.59)	64 (2.52)	380 (14.96)	81 (3.19)	45 (1.77)	36 (1.42)	100 (3.94)	137 (5.39)	440 (17.32)	101 to 103 (3.98 to 4.06)	145 (5.71)	81 (3.19)

Element removal distance for dimension C.



Indicator Details

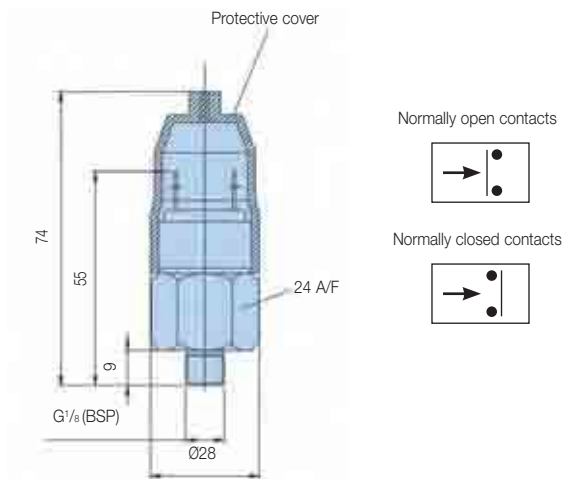

Visual indicator	2 bar
Thread connection	G ¹ / ₈
Code	FMUG5HBMG02L

Pressure switch	
Elec.rating	42V / 2A
Thread connection	G ¹ / ₈
Elec.connection	AMP terminal 6.3 x 0.8
Protection	IP65 (terminal IP00)
Setting	2 bar
Switch type	NO or NC
Code	FMUS6HBMG02L (NO switch)
	FMUS7HBMG02L (NC switch)

Note: Vacuum indicators visual or electrical are available on request for filter type SR2 only.

Principles of Operation

Suction Return Series filter

This one filter assembly is designed to carry out two specific functions:

- (1) Filter system return line oil.
- (2) Supply filtered oil under positive pressure to the closed loop hydrostatic circuits.

Principles of operation

- (1) Return oil from both the open and closed circuits* is fed into the Suction Return Series Filter at port 'R'.
- (2) The filtered oil is maintained at a nominal 0.5 bar by the unique back pressure valve assembly and fed into the closed loop hydrostatic circuit via port 'S'.
- (3) Surplus filtered oil is fed back to the tank via the back pressure valve assembly.
- (4) Emergency suction (anti-cavitation) valve: This valve is fitted as standard to ensure oil is always available to the closed loop system, even on emergency occasions when the return flows do not meet the flow demands of the closed loop circuit.

Additional installation guidance notes

- (1) Return oil flow should always be greater than the oil flow rate demanded by the closed loop charge pump.
- (2) Oil level at all times should not fall below valve assembly at the base of the filter bowl.

Benefits

- (1) Only one filter is required to supply filtered oil to both open and closed loop circuits.
- (2) Feeding the closed loop circuit with filtered oil at a nominal pressure of 0.5 bar ensures excellent cold start characteristics, thus reducing the risk of cavitation.
- (3) Four hole mounting with gasket seal.
- (4) Microglass III filter element materials ensure; low pressure drop, high dirt holding capacity and extended service life.
- (5) Type Parker SR filters with patented *LEIF*® element, unique drain construction, quick element replacement concept.

*CAUTION:

Back pressure in pump and motor drain lines should always be kept at a minimum thus protecting shaft seals etc.

If case drain oils are to be fed through the return line filter please consult the pump/motor manufactures for details on maximum allowable back pressure.

Ensure filter elements are replaced when element condition indicators show that the bypass setting has been reached.

Failure to observe the above operation and guidance notes, or use of non genuine Parker specified filter elements could cause damage to the system. System designers should always ensure that adequate cooling capacity is available.

Suction Return Series

Tanktop Mounted Suction & Return Line Filters - Types SR1 & SR2


Pressure Drop Curves (Type SR1)

The recommended level of the initial pressure drop is approximately 1 bar.


If the medium used has a viscosity different from 32cSt, pressure drop over the filter can be estimated as follows:

The total Δp = Housing Δp_h + (Element $\Delta p_e \times \text{working viscosity}/32$).

SRL1 Empty Housing (Length Code 2)

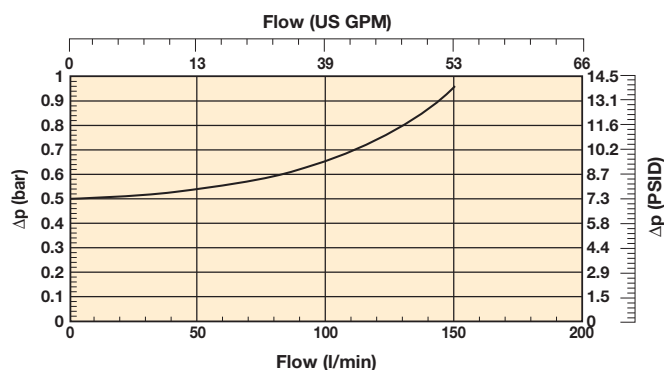

SRL1 (Element Length Code 2)

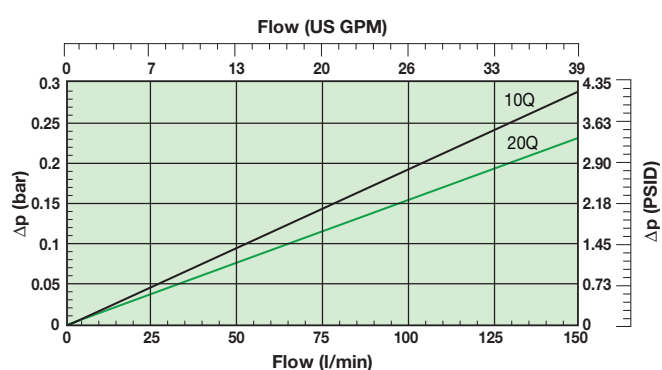


Curves are based on 32cSt fluid viscosity and 0.87 Kg/l density.

Line represents the Δp of the housing including the back pressure valve.


Pressure Drop Curves (Type SR2)

Curves are based on 32cSt fluid viscosity and 0.87 Kg/l density.

SRL2 Empty Filter Housing

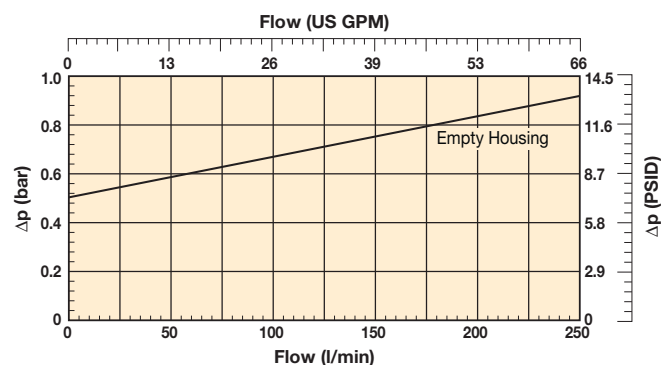

SRL2 Filter Element Length 2

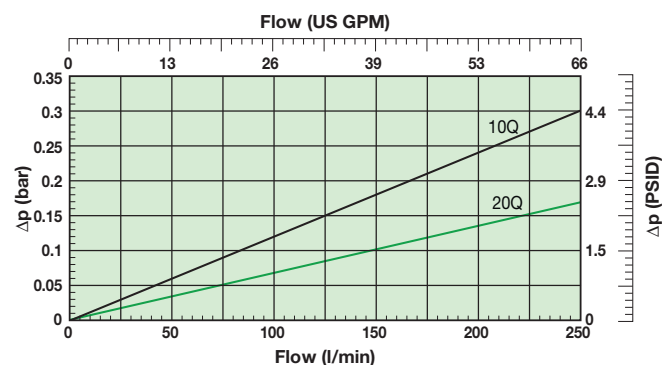

Line represents the Δp of the housing including the back pressure valve.

Ordering Information

Standard products table

Part number	Supersedes	Flow (l/min)	Model number	Element length	Media rating (µ)	Seals	Indicator	Bypass settings	Ports return	Ports suction	Included options	Replacement elements	Supersedes
SRL1210QLBPGG161		130	SRL1	Length 2	10	Nitrile	Plugged	1.7 Bar (25 Psi)	G1	G ³ / ₈	None	937984Q	SRE12Q10
SRL1220QLBPGG161		130	SRL1	Length 2	20	Nitrile	Plugged	1.7 Bar (25 Psi)	G1	G ³ / ₈	None	937985Q	SRE12Q20
SRL2210QLBPGG201	SRL22Q10NP1B10	250	SRL2	Length 2	10	Nitrile	Plugged	1.7 Bar (25 Psi)	G1 ¹ / ₄	2xG1	None	937946Q	SRE22Q10
SRL2220QLBPGG201	SRL22Q20NP1B10	250	SRL2	Length 2	20	Nitrile	Plugged	1.7 Bar (25 Psi)	G1 ¹ / ₄	2xG1	None	937947Q	SRE22Q20

Note: Filter assemblies ordered from the product configurator below are on extended lead times. Where possible, please make your selection from the table above.

Product configurator

Configurator example SR filter

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
SRL2	2	05QL	B	S6	G	2G20	I

Box 1

Code	
Model	Code
SR1 Series with LEIF [®] element	SRL1
SR2 Series with LEIF [®] element	SRL2

Highlights Key (Denotes part number availability)

123	Item is standard
123	Item is standard green option
123	Item is semi standard
123	Item is non standard

Note: Standard items are in stock, semi standard items are available within four weeks

Box 2

Filter type	
Housing	Code
Reduced length	on request
Standard length	2
Extended length	on request

Box 3

Degree of filtration				
Element	LEIF [®]			
	Q3 glassfibre βx(c) >200			
	Code	Code	Code	Code
LEIF [®]	02QL	05QL	10QL	20QL

Box 4

Seal type	
Seal material	Code
Nitrile	B
Fluoroelastomer	V

Box 5

Indicator	
	Code
Pressure gauge, setting 2.0 bar, G ¹ / ₈	G5
Pressure switch 42V, 2.0 bar setting, NO with G ¹ / ₈ BSP	S6
Pressure switch 42V, 2.0 bar setting, NC with G ¹ / ₈ BSP	S7
Pressure switch 250V, NO/NC with G ¹ / ₈	on request
No indicator, indicator port L + R plugged	P
Vacuum switch / vacuum gauge	on request
Other settings for indicators / gauges on request	on request

Box 6

Bypass valve	
Bypass valve	Code
1.7 bar	G
2.5 bar	I
Blocked bypass	on request
Other bypass settings	on request

Box 7

Filter connection		
Ports	Code	Note
Return port 1 x G1 (ISO228) + Suction port 1 x G ¹ / ₄ (ISO228)	G16	SRL1
Return port 1 x G1 ¹ / ₄ (ISO228) + Suction port 2 x G1 (ISO228)	G20	SRL2
Return port 2 x G1 ¹ / ₄ (ISO228) + Suction port 2 x G1 (ISO228)	2G20	SRL2
Return port 1 x SAE20 + Suction port 2 x SAE16	S20	SRL2
Return port 2 x SAE20 + Suction port 2 x SAE16	2S20	SRL2

Box 8

Options	
Options	Code
None	1
Strainer 120 micron	G
Dipstick	6
Plugged vent port in cover (on request)	on request
Strainer 120 micron, dipstick and plugged vent port	I
Customized options	on request

Degree of filtration						Media code
Average filtration beta ratio β (ISO 16889) / particle size μm [c]						
βx(c)=2	βx(c)=10	βx(c)=75	βx(c)=100	βx(c)=200	βx(c)=1000	
% efficiency, based on the above beta ratio (βx)						
50.0%	90.0%	98.7%	99.0%	99.5%	99.9%	
N/A	N/A	N/A	N/A	N/A	4.5	
N/A	N/A	4.5	5	6	7	02Q/02QL
N/A	6	8.5	9	10	12	05Q/05QL
6	11	17	18	20	22	10Q/10QL
						20Q/20QL

Note 1: Part numbers featured with bold highlighted codes will ensure a 'standard' product selection.

Note 2: Alternate displayed part number selection will require you to contact Parker Filtration for availability.

Spare elements		
Replacement elements	Supersedes	
937942Q	SRR12Q05N	Semi standard
937943Q	SRR12Q10N	Standard
937944Q	SRR12Q20N	Standard
937945Q	SRE22Q05	Semi standard
937946Q	SRE22Q10	Standard
937947Q	SRE22Q20	Standard
937983Q	SRE12Q05	Semi standard
937984Q	SRE12Q10	Standard
937985Q	SRE12Q20	Standard

Suction Return - Series Seal Kits	
Part Number	Description
2049010065	NITRILE SEAL KIT SRL1
2049010061	NITRILE SEAL KIT SRL2





LEIF®



Ecoglass III

Parker E-Series

Ensure that the impact for the environment is minimized.

The development of filter products for Parker is an on-going process driven by the needs of the customer and the protection of our fragile planet.

E-Series filters are Parker's positive contribution to help minimize the impact on the environment with LEIF® Low Environmental Impact Filters and the Ecoglass III elements. Product ranges that together will help reduce disposal volumes and costs.

For more information on Parker Filtration's hydraulic environmental solutions, contact us today.

E-Series

Low Pressure Filters LEIF® elements

- Up to 1500 l/min
- Patented design
- Re-usable element sleeve
- Contributes to ISO 14001
- LEIF® elements contain Ecoglass III media

Medium & High Pressure Filters Ecoglass III elements

- Medium pressure up to 1400 l/min
- High pressure up to 450 l/min
- Re-usable support tube
- Contributes to ISO 14001
- Ecoglass III media

PT Tank Top Mounted filters

Max. 400 l/min - 10 bar



An economical alternative for quality tank top mounted filtration

In to out flow design avoids re-contamination of the hydraulic system

The PT tank top mounted filter features an aluminium filter head and screw-in style filter elements. This offers the opportunity to use the filter element as screw-in style for co-polymer reservoirs. With a patented design that protects the quality of filtration, the PT offers a modularity and value for money.



Contact Information: Product Features:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)
filtrationinfo@parker.com

www.parkerhfde.com

- Compact tank top mounted return line filter.
- Filter element can be used for direct screw-in mounting with co-polymer reservoirs.
- Patented filter element.
- In to Out flow avoids re-contamination of the system.
- Flow capability up to 400 l/min at 10 bar working pressure.
- Full options available July 2010.

PT Tank Top Mounted filters

Max. 400 l/min - 10 bar

Features & Benefits

Features	Advantages	Benefits
Aluminium filter head	Low profile, lightweight and durable	Less weight, smaller envelope and cleaner appearance.
In-to-Out filtration	All captured contamination retains inside the element	No recontamination of the system during change of element
Disposable filter cartridge	Easy to change cartridge	New housing cover and seals provided with each element change
Microglass III media	Multi-layered design produces high capacity and efficiency	Reliable performance. Reduced downtime

Typical Applications

- Lorry mounted cranes
- Agricultural equipment
- Grass cutting equipment
- Container hook loaders

The Parker Filtration PT tank top mounted series

The PT Series filter is available in various sizes covering a flow rate up to 400 l/min. Using the Microglass III media in 2, 5, 10 and 20 microns it provides premium particle removal efficiency.

This unique design simply threads into a ported tank ring, which can be bolted to a metal reservoir.

The disposable filter cartridge is a single-piece construction, which incorporates the nylon cover and integral 2 bar bypass valve. The flow path is inside-out and requires no special tools for service.

This concept assures minimal installation costs with the least space requirements for return line applications.



Specification

Pressure ratings:

Max. 10 bar.

Connections

PT2: G $\frac{3}{4}$ " and G1"

PT4: G1" or G1 $\frac{1}{4}$ "

Filter housing:

Aluminium

Filter element:

Patented design including cover for filter housing (one disposable unit)

Seal material:

Nitrile, Fluoroelastomer

Operation temperature:

-20°C to + 100°C

Bypass:

1.7 bar

Degree of filtration:

Determined by multipass test in accordance to ISO16889

Flow fatigue:

Filter media is supported so that the optimal fatigue life is achieved (ISO3724)

Filter Media:

Microglass III

Indicator options:

Visual and electrical switch (NO/NC) type

Fluid compatibility:

Mineral and HEES type fluids

Principle of Filtration

The PT applies In-to-Out Filtration, this ensures that captured contamination is retained in the element during servicing the filter.

Bypass valve is integrated in the filter bottom element end cap. The filter element is completely disposable.

Safety First

Each spare filter element is including seals for the sealing between tank top mounted filter housing and filter element. Because all seals are pre-mounting, no risk that (incorrect) seals are not replaced.

PT Reservoir 'screw-in' solution to reduce costs and space

The PT applies In-to-Out Filtration, this ensures that captured contamination is retained. The PT element can be integrated directly into a co-polymer reservoir. Parker Filtration can provide cavity details to co-polymer reservoir manufacturers to support this innovative solution.

This cavity includes the integrated return line port and optional connection for the pressure switch.

Thanks to the complete screw-in style solution, typically over 30% of the first fit cost can be reduced, the reservoir surface remains flat and hence can support more compact solutions, in particular for mobile applications.

Compared to the traditional tank top mounted filter, improved sealing between the reservoir and the filter can be achieved, eliminating potential leakage areas by 50% typically.

Please consult Parker Filtration for engineered reservoir solutions

Important information when applying airtight funnels

Recommended opening in the tank top plate for the PT supplied with air tight funnel:

PT2 : 63.5 mm +/- 0.2 mm

PT4 : 98.5 mm +/- 0.2 mm

Installation Information

	Build in length in tank (mm)
PT2 Length 1	95
PT2 Length 2	185
PT2 Length 3	280
PT4 Length 1	98
PT4 Length 1	189
PT4 Length 1	310





PT Tank Top Mounted filters

Max. 400 l/min - 10 bar

Specification (cont)



PT2 Assembly without funnel

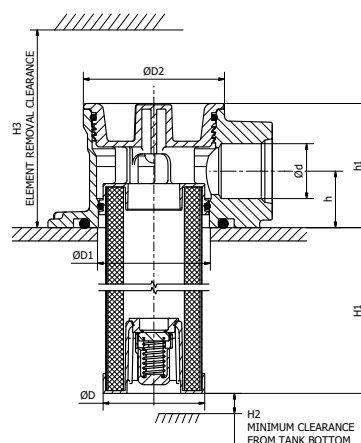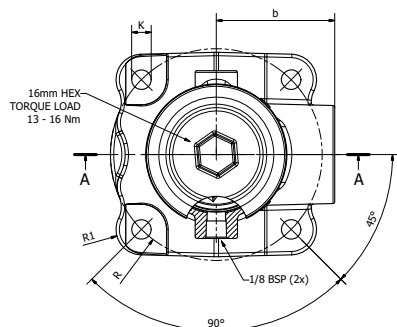

PT2 Screw-in Filter

Type	Connection Options	H1	H2	H3	h	h1	ØD	ØD1	ØD2	b	R	R1	K
PT2-1	G3/4, G1	78	6,5	190	25,4	56	Ø46	Ø51	Ø64	53	48	12	4x8,8
PT2-2	G3/4, G1	181	6,5	293	25,4	56	Ø46	Ø51	Ø64	53	48	12	4x8,8
PT2-3	G3/4, G1	277	6,5	389	25,4	56	Ø46	Ø51	Ø64	53	48	12	4x8,8

PT2 Assembly with funnel

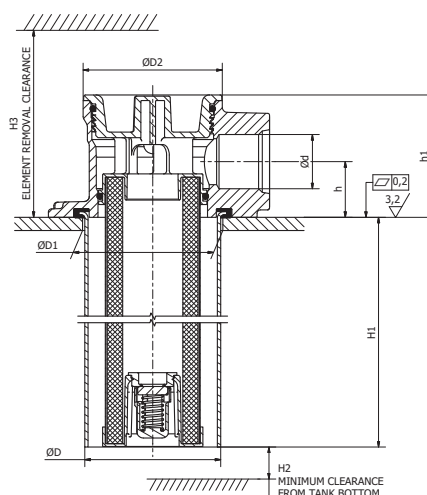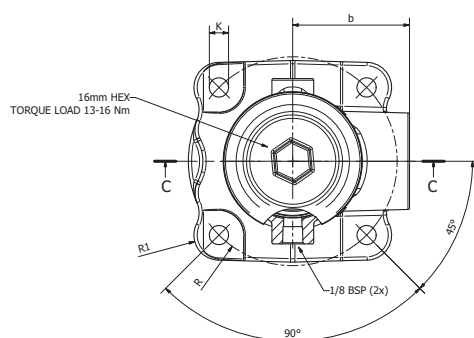


PT2 Screw-in Filter

Type	Connection Options	H1	H2	H3	h	h1	ØD	ØD1 +/-0,5	ØD2	b	R	R1	K
PT2-1	G3/4, G1	78	6,5	190	25,4	56	Ø62	Ø64	Ø64	53	48	12	4x8,8
PT2-2	G3/4, G1	181	6,5	293	25,4	56	Ø62	Ø64	Ø64	53	48	12	4x8,8
PT2-3	G3/4, G1	277	6,5	389	25,4	56	Ø62	Ø64	Ø64	53	48	12	4x8,8

Specification (cont)


PT4 Assembly without funnel

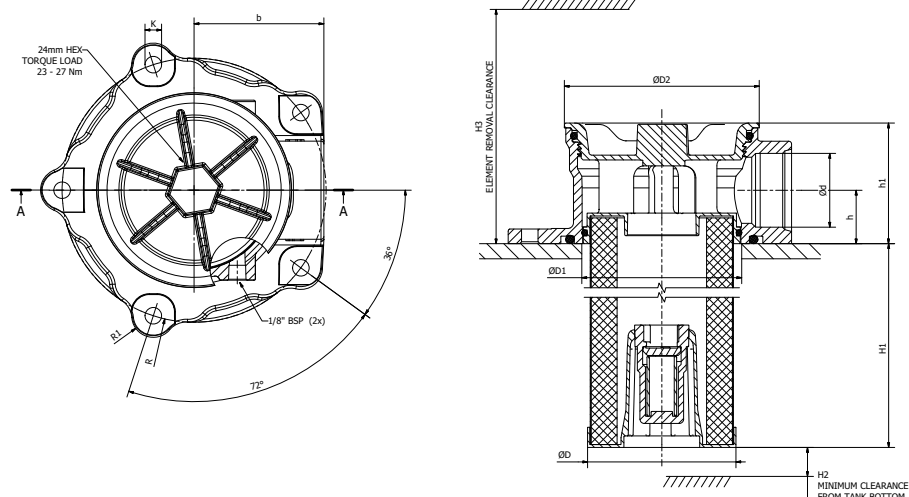

PT4 Screw-in Filter

Type	Connection Options	H1	H2	H3	h	h1	ØD	ØD1	ØD2	b	R	R1	K
PT4-1	G1, G1-1/4	94	10	222	28.2	64	Ø78.5	Ø85	Ø103	69	70	12	5xØ8,8
PT4-2	G1, G1-1/4	185	10	313	28.2	64	Ø78.5	Ø85	Ø103	69	70	12	4xØ8,8
PT4-3	G1, G1-1/4	306	10	434	28.2	64	Ø78.5	Ø85	Ø103	69	70	12	4xØ8,8

PT4 Assembly with funnel

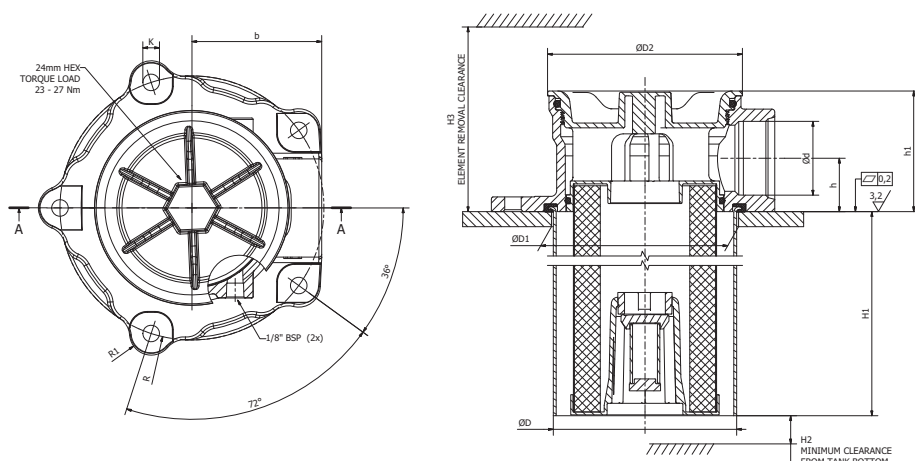

PT4 Screw-in Filter



Type	Connection Options	H1	H2	H3	h	h1	ØD	ØD1 +/-0,5	ØD2	b	R	R1	K
PT4-1	G1, G1-1/4	94	10	222	28.2	64	Ø97	Ø99	Ø103	69	70	12	5xØ8,8
PT4-2	G1, G1-1/4	185	10	313	28.2	64	Ø97	Ø99	Ø103	69	70	12	5xØ8,8
PT4-3	G1, G1-1/4	306	10	434	28.2	64	Ø97	Ø99	Ø103	69	70	12	5xØ8,8

PT Tank Top Mounted filters

Max. 400 l/min - 10 bar



Pressure Drop Curves (Type SR1)

Flow Performance Charts - PT2 Series

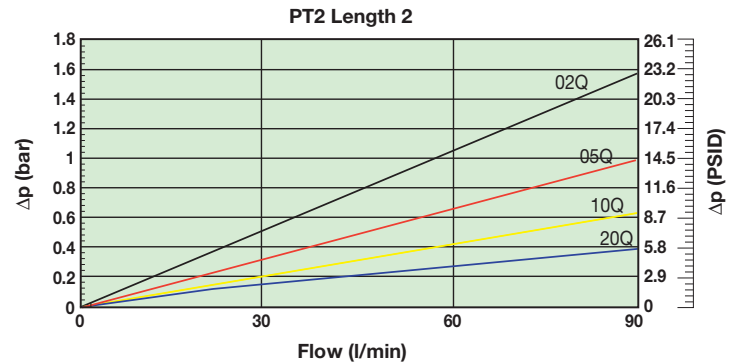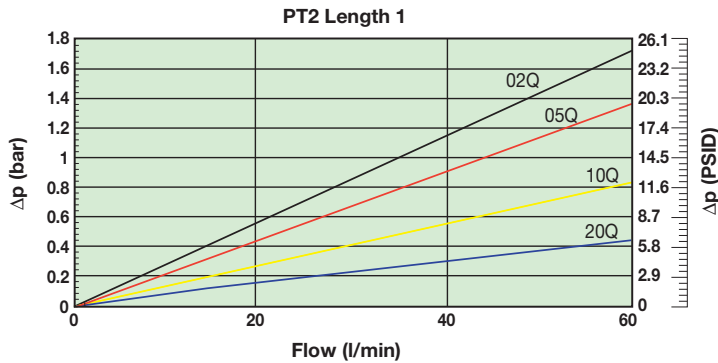


All delta-p values are based on 30 cSt fluid and 0,87 kg/l density

Flow Performance Charts - PT4 Series

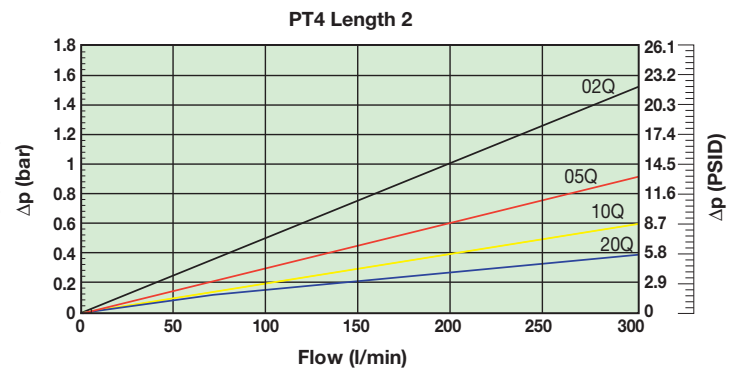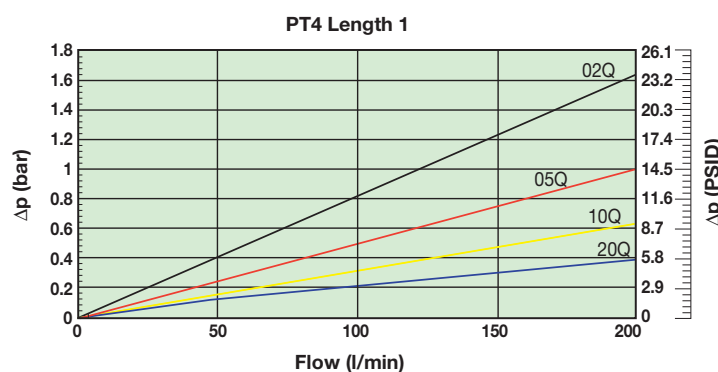


Flow Performance Charts - PT4 Series

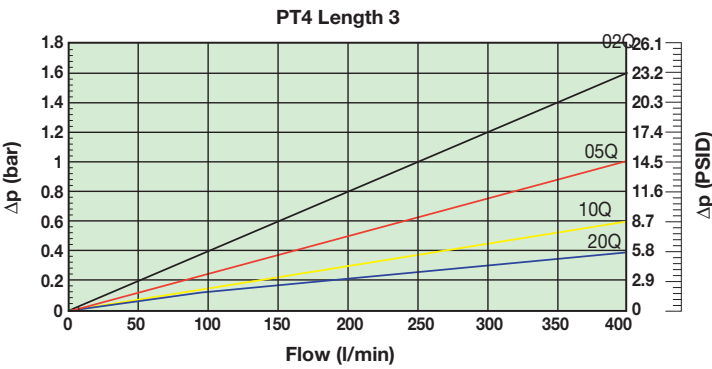

Indicator Information

Indicator PS NO/NC pressure switch

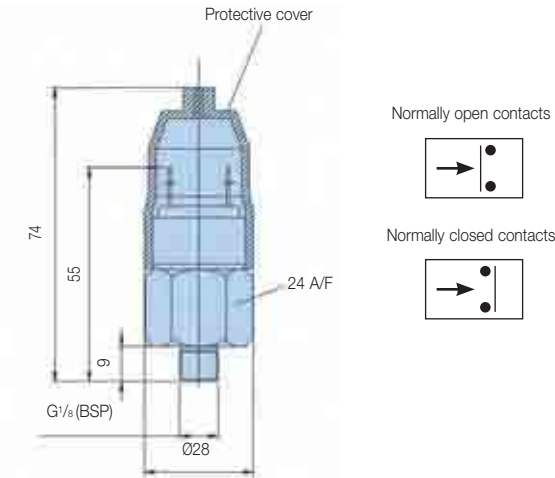

Specifications	
Elec. rating	42V / 2A
Thread connection	G $\frac{1}{8}$
Elec. connection	AMP terminal 6.3 x 0.8
Protection	IP65 (terminal IP00)
Switch type	NO or NC
Code	FMUS2EBMG02L (NO switch)
	FMUS3EBMG02L (NC switch)

Ordering Information

Product configurator

Configurator example PT filter

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
PT2	1	10Q	B	P	G	G12	I

Box 1

Housing	Code
PT2	PT2
PT4	PT4

Highlights Key (Denotes part number availability)

123	Item is standard
123	Item is standard green option
123	Item is semi standard
123	Item is non standard

Note: Standard items are in stock, semi standard items are available within four weeks

Box 2

Element Length	Code
Length 1	1
Length 2	2
Length 3 (PT4 only)	3

Box 3

Filter media (Microglass III)	Code
2 micron	02Q
5 micron	05Q
10 micron	10Q
20 micron	20Q

Box 4

Seal Material	Code
Nitrile	B
Viton	V

Box 5

Indicator	Code
Plugged port	P
Pressure Switch 24V, 1.2 bar setting, NO	S2
Pressure Switch 24V, 1.2 bar setting, NC	S3

Box 6

Bypass Valve	Code
1.7 bar	G

Box 7

Ports	Code
G ³ / ₄ (PT2 only)	G12
G1	G16
G1 ¹ / ₄ (PT4 only)	G20

Box 8

Options	Code
No diffuser required	1
Airtight diffuser	4

Spare Filter Elements

Media	PT2-1	PT2-2	PT4-1	PT4-2	PT4-3
20Q	936753Q	936757Q	936745Q	936749Q	936879Q
10Q	936752Q	936756Q	936744Q	936748Q	936878Q
05Q	936751Q	936755Q	936743Q	936747Q	936877Q
02Q	936750Q	936754Q	936742Q	936746Q	936876Q

Filter Media Efficiency

Degree of filtration						Media code
Average filtration beta ratio β (ISO 16889) / particle size μm [c]						
$\beta(x)c=2$	$\beta(x)c=10$	$\beta(x)c=75$	$\beta(x)c=100$	$\beta(x)c=200$	$\beta(x)c=1000$	
% efficiency, based on the above beta ratio (βx)						
50.0%	90.0%	98.7%	99.0%	99.5%	99.9%	
N/A	N/A	N/A	N/A	N/A	4.5	02Q/02QL
N/A	N/A	4.5	5	6	7	05Q/05QL
N/A	6	8.5	9	10	12	10Q/10QL
6	11	17	18	20	22	20Q/20QL

Note 1: Part numbers featured with bold highlighted codes will ensure a 'standard' product selection.

Note 2: Alternate displayed part number selection will require you to contact Parker Filtration for availability.



Maxiflow Series

Spin-on Filters

Max. 360 l/min - 10 bar



**Designed for both
suction and return
application**

**Spin-on filters with
integrated indicator**

The Maxiflow Series full flow filters for suction or return feature two integrated red/green indicators. Maximum pressure 10 bar. Maximum flow 360 l/min. A proven filter in many mobile and industrial applications from refuse vehicles to industrial power units



Contact Information: Product Features:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)
filtrationinfo@parker.com

www.parkerhfde.com

- Maxiflow full flow filters for suction or return applications.
- Available with a variety of integrated and add-on indicators.
- Maximum pressure 10 bar. Maximum flow 360 l/min.
- High quality filter medium.



Maxiflow Series

Spin-on Filters

Max. 360 l/min - 10 bar

Features & Benefits

Features	Advantages	Benefits
Integrated indicator	Compact and robust durable construction	Easy identification of element status
High quality paint for canisters	Long term protection against corrosion	Improved protection of filter medium
Spin-on filters available for suction and return line filtration	Flexible product offering	Standardisation of components
High quality filter medium	Filter medium suitable for fatigue load due to high frequent flow fluctuation	Extended element life time

Typical Applications

- Telescopic handlers
- Refuse vehicles
- Road sweepers
- Compactors
- Industrial power units
- Grass cutters
- Press brakes

The Parker Filtration Maxiflow Full Flow Filters for Suction or Return.

Maxiflow type MXA8 and MXA9 feature two integral red/green indicators incorporated into the head. Fitted as standard, they ensure maximum indicator visibility and early warning of filter condition.

Maxiflow type MXA7 features one integral indicator.




Specification

Maximum working pressure:	Preferred Series MXA 10 bar
Filter head material:	Aluminium LM24
Filter bowl material:	Steel
Seal material:	Nitrile
Operating temperature range:	-30°C to +90°C
Bypass:	Return line 1.05 bar Suction line 0.17 bar No bypass option
Fluids:	Mineral oils
Element media:	Microglass III media Cellulose media

PS Series
10 bar
Aluminium alloy
Steel
Buna (nitrile)
-30°C to +110°C
Return line 1.5 bar
Suction line 0.10 bar
No bypass option
Mineral oils
Microglass III media
Cellulose media

Installation Details


MXA.8/MXA.9***

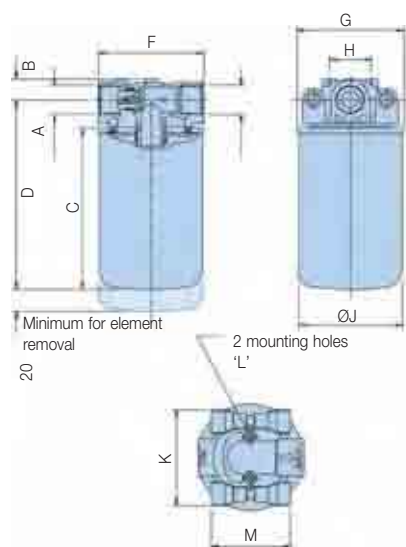


Filter selection

To select the correct filter use the appropriate pressure drop graphs. For details and an example of how to select the correct filter, see next page.

12PS/22PS

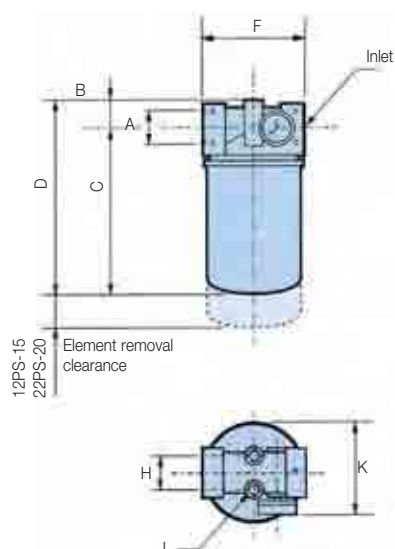

MXA.7***

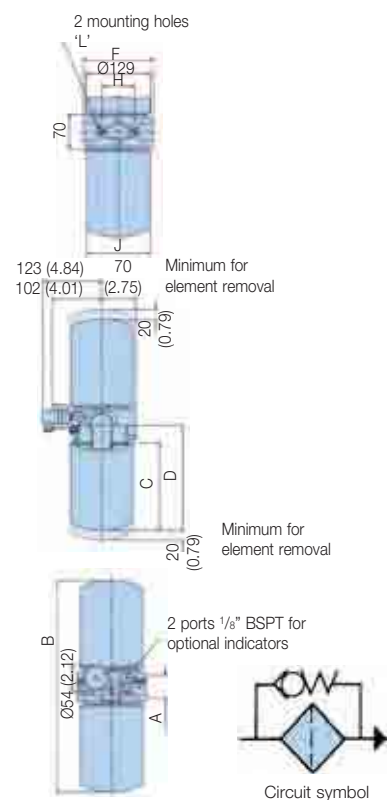

Type	A	B	C	D	F	G	H	J	K	L	M
MXA.8	G ^{3/4}	19 (0.75)	147 (5.79)	173 (6.81)	95 (3.74)	97 (3.82)	38 (1.49)	94 (3.7)	88 (3.46)	M8 x 1.25 x 16 full depth	72 (2.83)
12PS		22 (0.86)	165 (6.49)	187 (7.36)	95 (3.74)	N/A	38 (1.49)	93 (3.66)	107 (4.21)		N/A
MXA.9	G ^{1 1/4}	30 (1.18)	179 (7.04)	213 (8.38)	133 (5.24)	129 (5.08)	50 (1.97)	127 (5.0)	130 (5.12)		72 (2.83)
22PS		28 (1.10)	208 (8.19)	236 (9.29)	133 (5.23)	N/A	50 (1.97)	130 (5.12)	N/A	M10 x 1.5	N/A
MXA.7	G ^{1 1/2}	430 (16.93)	179 (7.05)	214 (8.42)	140 (5.51)	N/A	65 (2.56)	127 (5.0)	N/A		N/A

Maxiflow Series

Pressure Drop Curves


The recommended level of the initial pressure drop for low pressure filters is max 0.5 bar.

If the medium used has a viscosity different from 30cSt, pressure drop over the filter can be estimated as follows:


$$\Delta p = (\Delta p_{30} \times \text{viscosity of medium used}) / 30\text{cSt}$$

Maxiflow (MXA.8*** Series) and 12PS Series

Filter Housing

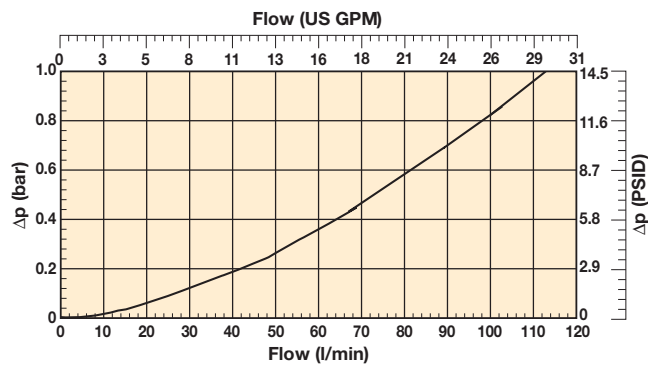


Filter Element

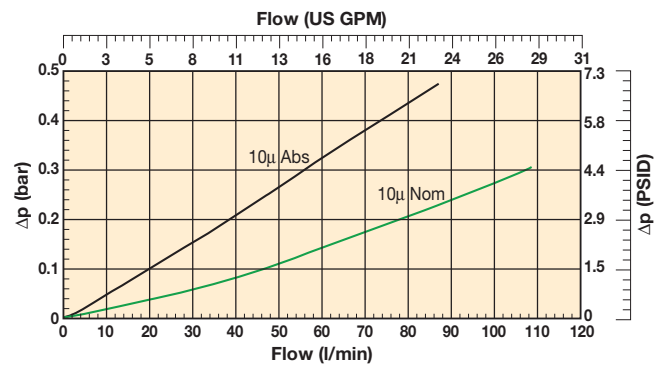


Maxiflow (MXA.9*** Series) and 22PS Series

Filter Housing

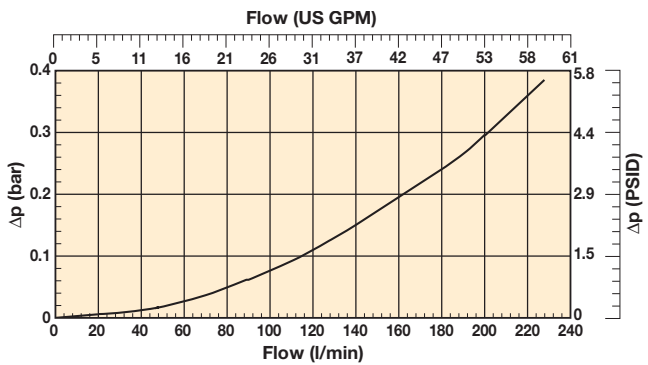


Filter Element

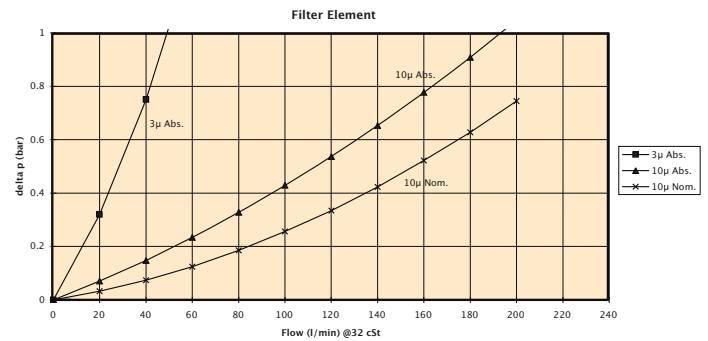


Maxiflow (MXA.7*** Series)

Filter Housing

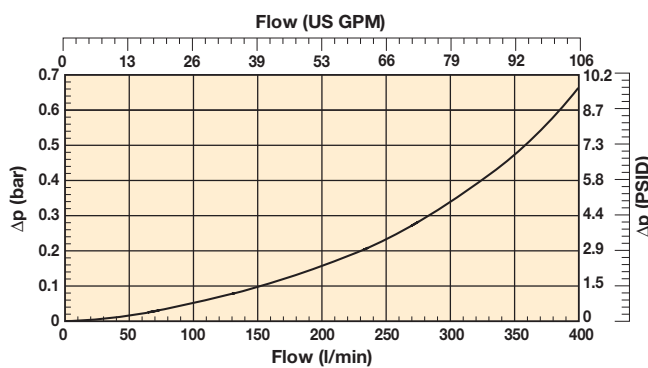

Filter Element

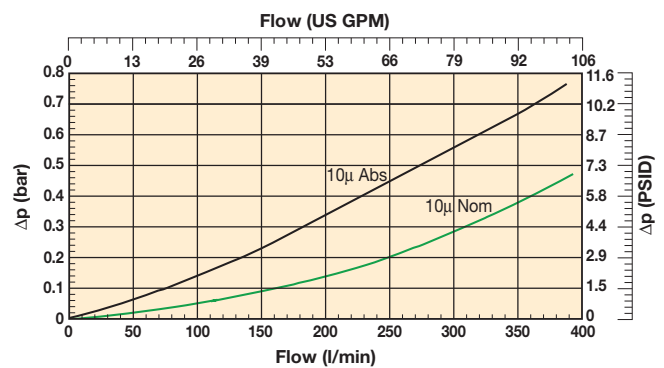

Note: All above data is calculated at 30cSt Rel density 0.856.

Ordering Information

Type	Part number	Description	MAOP (bar)	Flow (l/min)	Media rating	Ports	Replacement element
------	-------------	-------------	------------	--------------	--------------	-------	---------------------

MXA.8*** & 12PS Return Line Filters

MXA	MXA8551424	Assembly with bypass & dual visual indicators	10	70	10 micron abs.	G ³ / ₄	MXR8550
PS	12PS10BTV1R2B	Assembly with bypass & gauge type visual indicators					
MXA	MXA8511424	Assembly with bypass & dual visual indicators	10	70	10 micron nom.	G ³ / ₄	MX1518410 (x4*)
PS	12PS10CTV1R2B	Assembly with bypass & gauge type visual indicators					
	12PS10CTE2R2B	Assembly with bypass & electrical pressure indicator					
	12PS10CTPR2B	Assembly with bypass & no indicator					

MXA.8*** & 12PS Suction Line Filters

MXA	MXA8511223	Assembly with bypass & dual visual indicators	10	20	10 micron nom.	G ³ / ₄	MX1518410 (x4*)
PS	12PS10CTV1S4B	Assembly with bypass & gauge type visual indicator					
MXA	MXA8510223	Assembly without bypass, with dual visual indicators					
PS	12PS10CTV1SX4B	Assembly without bypass, with gauge type visual indicator					

MXA.9*** & 22PS Return Line Filters

MXA	MXA9561424	Assembly with bypass & dual visual indicators	10	30	3 micron abs.	G1 ¹ / ₄	MXR9560
-----	------------	---	----	----	---------------	--------------------------------	---------

3 Micron abs. filtration for Off-Line and Bypass System Clean Up

Maxiflow 3 micron elements are ideal for off-line or bypass clean up applications. These can be specified for the 9*** and 7*** series return line filters

MXA	MXA9551424	Assembly with bypass & dual visual indicators	10	180	10 micron abs.	G1 ¹ / ₄	MXR9550
PS	22PS10BTV1R2D	Assembly with bypass & gauge type visual indicators					
PS	22PS10BTE2R2D	Assembly with bypass & electrical pressure indicator					
PS	22PS10BTPR2D	Assembly with bypass & no indicator					
MXA	MXA9511424	Assembly with bypass & dual visual indicators	10	180	10 micron nom.	G1 ¹ / ₄	MX1591410 (x4*)
PS	22PS10CTV1R2D	Assembly with bypass & gauge type visual indicator					
PS	22PS10CTE2R2D	Assembly with bypass & electrical pressure indicator					
PS	22PS10CTPR2D	Assembly with bypass & no indicator					

MXA.9*** & 22PS Suction Line Filters

MXA	MXA9511223	Assembly with bypass & dual visual indicators	10	48	10 micron nom.	G1 ¹ / ₄	MX1591410 (x4*)
PS	22PS10CTV2S4D	Assembly with bypass & gauge type visual indicator					
MXA	MXA9511023	Assembly without bypass, with visual indicators					
PS	22PS10CTPSX4D	Assembly without bypass, no indicator					

MXA.7*** Return Line Filters

MXA	MXA7551424	Assembly with bypass & visual indicator	10	300	10 micron abs.	G1 ¹ / ₂	MXR9550
MXA	MXA7511424	Assembly with bypass & visual indicator	10	350	10 micron nom.	G1 ¹ / ₂	MX1591410 (x4*)

MXA.7*** Suction Line Filters


MXA	MXA7551223	Assembly with bypass & visual indicator	10	80	10 micron abs.	G1 ¹ / ₂	MXR9550
	MXA7551023	Assembly without bypass with visual indicator					
MXA	MXA7511223	Assembly with bypass & visual indicator	10	80	10 micron nom.	G1 ¹ / ₂	MX1591410 (x4*)
	MXA7511023	Assembly without bypass with visual indicator					

The Maxiflow Series 7*** can be specified with additional visual or electrical indicators. Please consult Parker Filtration for details

Note: Elements marked with (x4*) are only available in packs of 4



The PAR FIT™ Fit



THERE'S **ONLY ONE** SOLUTION

When it comes to replacement hydraulic filter elements there is only one solution: The ParFit interchange element range.

With over 30,000 standard, off-the-shelf variations, there is a ParFit element to fit most sizes and makes of OEM filters on mobile, construction, agricultural and industrial plant.

Every ParFit filter element is manufactured in Europe to the highest standards and is backed by our unrivalled technical support and money-back guarantees.

That means that you can reduce stockholdings, cut costs and be sure of the ultimate performance, with long, trouble-free operating life.

ParFit filters are available from ParkerStores and authorised distributors throughout the UK. To find your nearest ParkerStore Email filtrationinfo@parker.com or find the ParFit you need using our element selector at www.parkerhfde.com.

ATZ Series

Suction Filters

Max. 300 l/min



When the ultimate protection is critical

Compact and robust cast aluminium filter design

The ATZ Series locate below tank oil level offering maximum protection for the hydraulic system pump. Pre-filtration takes place by means of a magnetic column. Maximum flow 300 l/min. Suitable for heavy duty industrial applications and recommended for reservoirs with high contamination ingress.



Contact Information:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
**(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)**
filtrationinfo@parker.com

www.parkerhfde.com

Product Features:

- ATZ submersible suction filters locate below tank oil level.
- Pre-filtration takes place by means of a magnetic column.
- Maximum flow 300 l/min.
- In-to-Out filter stops contaminated oil leaking back into the system.

ATZ Series

Suction Filters

Features & Benefits

Features	Advantages	Benefits
Cast aluminium construction	Compact and robust durable construction	Suitable for heavy duty industrial applications
Integrated check valve	Filter element can be changed when the filter housing is submerged under the oil in the tank	Improved protection of sophisticated pumps
Magnetic pre-filtration	Removes ferrous particles, even during bypass conditions	Improved fluid cleanliness levels Extended element life time
In-to-Out filtration	All captured contamination retains inside the element	No recontamination of system during change of elements
Wide range of vacuum measurement devices	Continuous filter condition monitoring	Contributes to just-in-time service Improved protection of pump when pressure measurement device connected with pump drive management

Typical Applications

- Wool untangling machine
- Hydraulic winch
- Power packs with sophisticated pumps
- Drilling blocks

The Parker Filtration ATZ Series Submersible Suction Filters.

ATZ Filters are located below the tank's oil level, offering maximum protection for the hydraulic system pump. When removing the element, the check valve closes automatically, eliminating any chance of oil leakage. Pre-filtration takes place by means of a magnet column. Thanks to the 'In-to-Out' filter principle, contaminated oil cannot leak back into the system. ATZ Filters are capable of handling nominal flow rates up to 300 l/min.



Specification

Operating pressure:
Vacuum.

Assembly:
Suction line filter, mounted horizontally against tank side.

Connections:
Threads G1¹/₂ (ISO 228) or flanges 2" SAE-300PSI.

Filter housing:
Aluminium.

Seal material:
Nitrile, neoprene, fluoroelastomer.

Operating temperature range:
Seal material Nitrile: -40° to +100°C.
Seal material Fluoroelastomer: -20° to +130°C.

Bypass valve:
Blocked.

Degree of filtration:
Determined by multipass test according to ISO 16889.

Flow fatigue characteristics:
Filter media is supported so that the optimal fatigue life is achieved.

Filtration media:
Microglass III.
10µ cellulose and 40µ Stainless Steel.


Element collapse rating:
10 bar (ISO 2941).

Pressure indicator options:
0.15 bar or 0.30 bar (vacuum gauge).
125-250VAC (LI-0, 5A, Lr-2, 0A) (electrical vacuum switch).
12-28Vdc (Li-1, 0A, Lr-3, 0A) (electrical vacuum switch).



Features:
Unique check valve, enabling element change below oil level.

Filter element:
Element with steel end caps.

ATZ-120

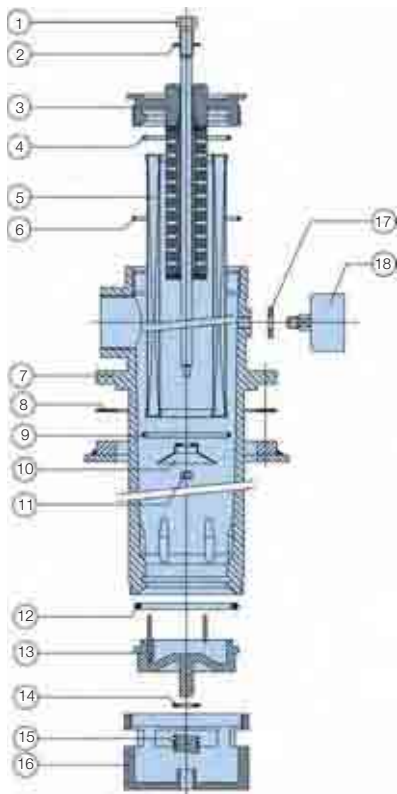

ATZ-300

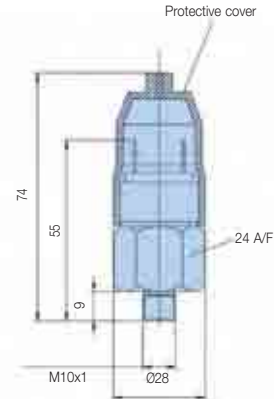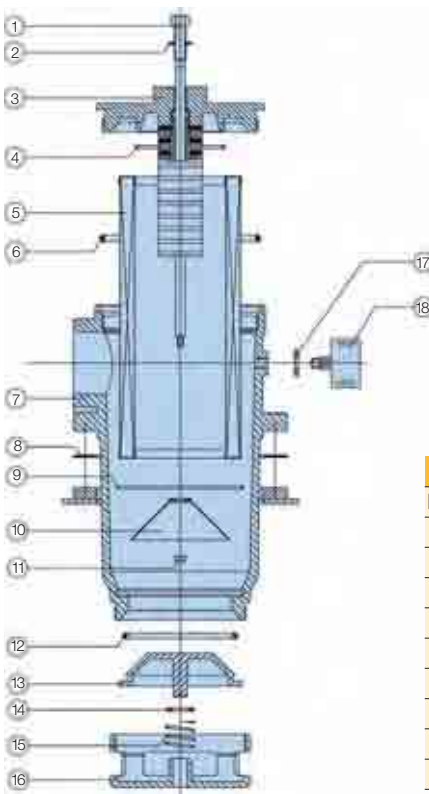

ATZ-120 & ATZ-300



Ref. No.	Description	Ref. No.	Description
1	1 Bolt	10	1 Valve support
2	1 Seal ring	11	1 Nut
3	1 Insert	12	1 O-ring
4	1 O-ring	13	1 Valve
5	1 Element	14	1 Ring
6	1 O-ring	15	1 Spring
7	1 Filter-housing	16	1 Valve-housing
8	1 Gasket	17	1 Bonded seal
9	1 O-ring	18	1 Indicator

ATZ Series

Suction Filters



Specification (cont.)

ATZ-120

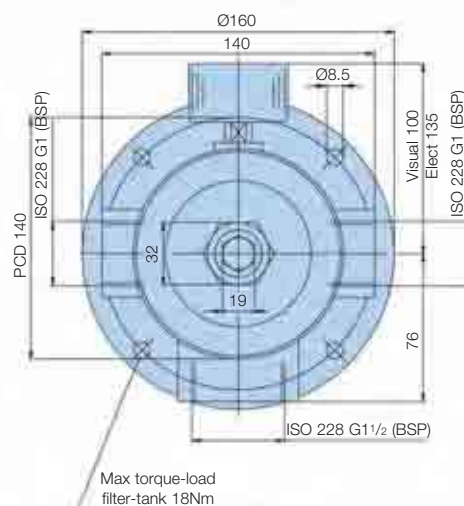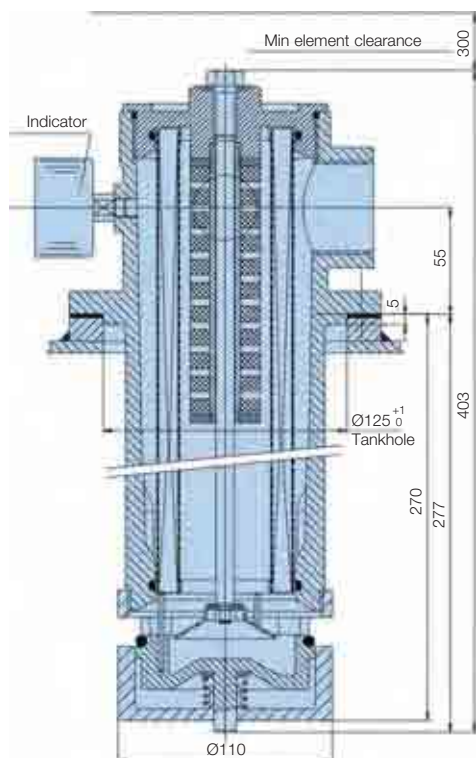

The Parker suction filters, type ATZ, are designed for submerged operation. The filters contain a unique check valve which automatically closes when the filter insert is removed from the housing, thus enabling element change below oil level. Construction is based on the field proven Parker Filter System.

ATZ-300

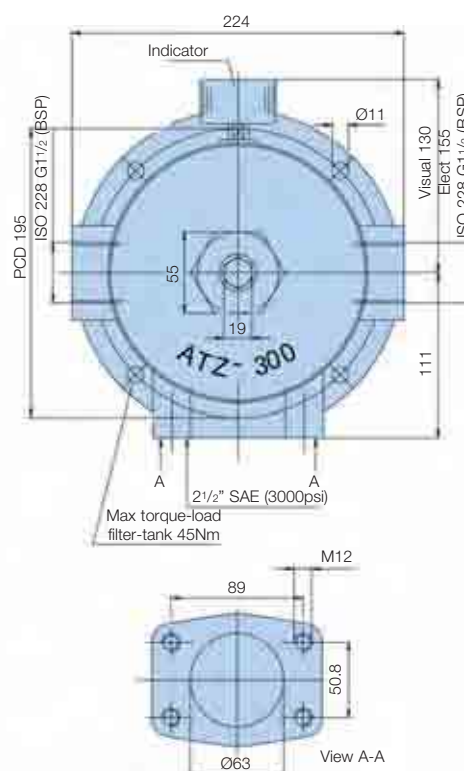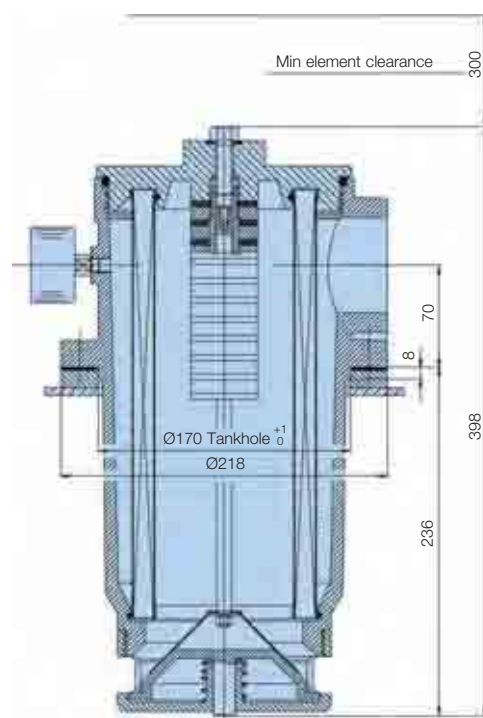

Pressure Drop Curves


The recommended level of the initial pressure drop for suction filters is 0.03 bar.

If the medium used has a viscosity different from 32cSt, pressure drop over the filter can be estimated as follows:


$$\Delta p = (\Delta p_{32} \times \text{viscosity of medium used}) / 32\text{cSt}$$

Filter housing and element pressure drop based on 32cSt fluid viscosity and 0.87 density.


ATZ 1-120 (G1½) Empty Housing

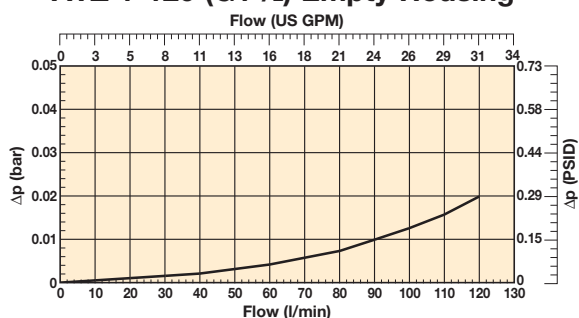


ATZ 300 (2½ SAE FLANGE) Empty Housing

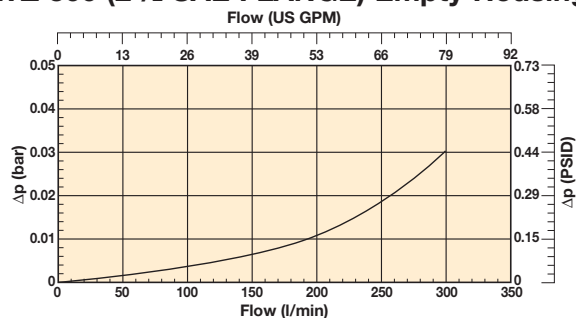


ATZ120 Filter Element Length 1

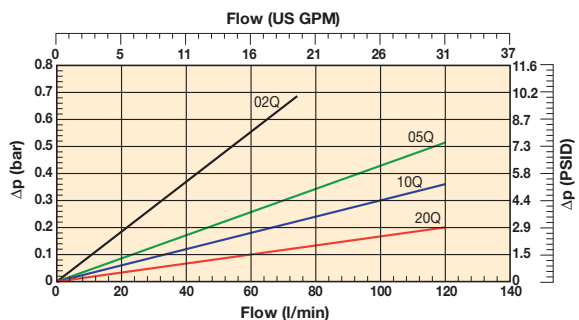


ATZ300 Filter Element Length 2

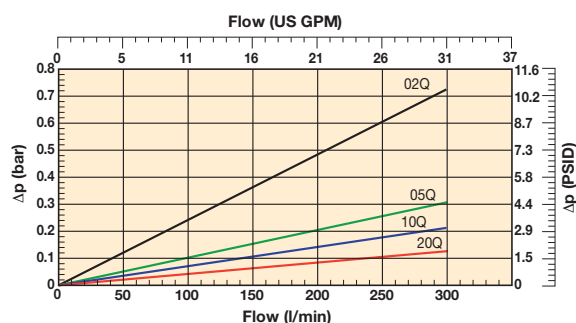

**ATZ120 Filter Element Length 1
(cellulose and stainless steel)**

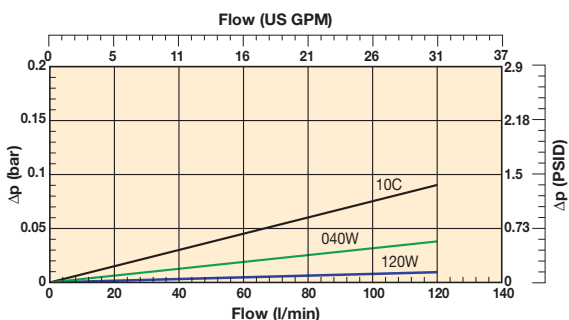

**ATZ300 Filter Element Length 2
(cellulose and stainless steel)**

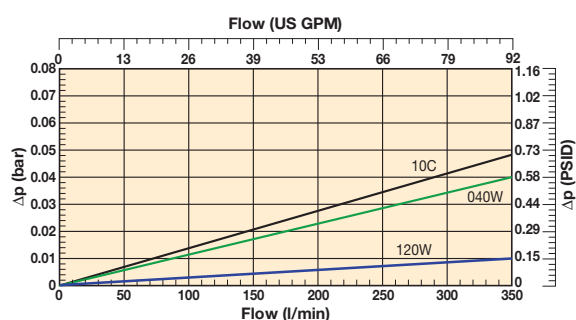

ATZ Series

Suction Filters

Ordering Information

Standard products table

Part number	Supersedes	Flow (l/min)	Model number	Element length	Media rating (μ)	Seals	Indicator	Bypass settings	Ports	Included options	Replacement elements	Supersedes
ATZ110CBPXG241	ATZ120-G1½ FXW1-R-10 B M	120	ATZ120	Length 1	10 NOM	Nitrile	Plugged	Blocked	G1½"	None	937958	FXW1-R-10
ATZ110QBXPXG241	ATZ120-G1½ FXW1-R-10 B M	120	ATZ120	Length 1	10 ABS	Nitrile	Plugged	Blocked	G1½"	None	937964Q	FXW1-R-10
ATZ210CBPXR481	ATZ300-S2½-C FXW3-10 B M	300	ATZ300	Length 2	10 NOM	Nitrile	Plugged	Blocked	2½" SAE-3000 PSI	None	937959	FXW3-10
ATZ210QBXPXR481	ATZ300-S2½-C FXW3-10 B M	300	ATZ300	Length 2	10 ABS	Nitrile	Plugged	Blocked	2½" SAE-3000 PSI	None	937965Q	FXW3-10

Note: Filter assemblies ordered from the product configurator below are on extended lead times. Where possible, please make your selection from the table above.

Product configurator

Configurator example ATZ filter

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
ATZ	2	10C	B	U2	X	R48	1

Box 1	Box 2	Box 3
Code	Filter type	Degree of filtration
ATZ	Housing	Element media
	ATZ 1-120	Glass fibre
	ATZ 2-300	Microglass III (for disposable elements)
		Cellulose
		Nom. rating
		Disposable element
		10C
		02Q
		05Q
		10Q
		20Q
		040W

Box 4
Seal type
Seal material
Nitrile
Fluoroelastomer
Neoprene
Code
B
V
N

Box 5
Indicator
Code
Vacuum gauge, setting -0.15 bar, M10x1
Vacuum gauge, setting -0.3 bar, M10x1
Vacuum switch 42V, -0.15 bar setting, NO/NC, M10 x 1
Vacuum switch 42V, -0.30 bar setting, NO/NC, M10 x 1
Vacuum switch 250 VAC, -0.15 bar setting, NO/NC, M10 x 1
Vacuum switch 250 VAC, -0.30 bar setting, NO/NC, M10 x 1
No indicator, indicator ports not machined
No indicator, indicator port plugged
Other settings for indicators / gauges on request
U1
U2
V1
V2
V3
V4
N
P
on request

Box 6
Bypass valve
Code
Bypass valve
Blocked bypass
X

Box 7
Filter connection
Ports
G1½" + 2 x G1" (For ATZ 1-120 only)
2½" SAE-3000 PSI +2 x G1½" (For ATZ 2-300 only)
Code
G24
R48

Box 8
Options
Options for ATZ 1-120
1 x G1½" + 1 x G1" plugged
Not plugged
1 x G1" right plugged
2 x G1" left & right plugged
Special
Code
1
Q
R
P
on request
Options for ATZ 2-300
2½"SAE with blind counterflange
No counterflange
Special
Code
1
Q
on request

Highlights Key (Denotes part number availability)

123	Item is standard
123	Item is standard green option
123	Item is semi standard
123	Item is non standard

Note: Standard items are in stock, semi standard items are available within four weeks

Degree of filtration						Media code
Average filtration beta ratio β (ISO 16889) / particle size μm [c]						
βx(c)=2	βx(c)=10	βx(c)=75	βx(c)=100	βx(c)=200	βx(c)=1000	
% efficiency, based on the above beta ratio (βx)						
50.0%	90.0%	98.7%	99.0%	99.5%	99.9%	
N/A	N/A	N/A	N/A	N/A	4.5	02Q
N/A	N/A	4.5	5	6	7	05Q
N/A	6	8.5	9	10	12	10Q
6	11	17	18	20	22	20Q

Spare element table						
ATZ 1-120	FXW1-R-10	FXW1-R-2	FXW1-R-5	FXW1-R-10	FXW1-R-20	SF1-R-40
Part number spare element	937958	937960Q	937962Q	937964Q	937966Q	937967
ATZ 2-300	FXW3-10	FXW3-2	FXW3-5	FXW3-10	FXW3-20	SF3-40
Part number spare element	937959	937961Q	937963Q	937965Q	937966Q	937968

Visual indicator	
Setting	-0.3 bar
Thread connection	M10x1
Code	FMUU2VBMM10L

Electrical switch	
Setting	-0.3 bar
Thread connection	M10x1
Switch type	NO or NC
Elec.connection	AMP terminal 6.3x0.8
Protection	IP54 (terminal IP00)
Performance	125-250 VAC (Li 0.5A, Lr 2.0A max)
	12-28 Vdc (Li 1.0A, Lr3.0A max)
Code	FMUV2VBMM10L

Note 1: Part numbers featured with bold highlighted codes will ensure a 'standard' product selection.
Note 2: Alternate displayed part number selection will require you to contact Parker Filtration for availability.



ATZ Series Seal Kits	
Part Number	Description
2049010001	NITRILE SEAL KIT ATZ1
2049010060	FLUOROELASTOMER SEAL KIT ATZ1
2049010002	NITRILE SEAL KIT ATZ2

Parker Hannifin
Hydraulic Filter Division Europe
FDHB500UK.

12AS Series

Coreless Spin-on Filter
Max. 75 l/min - 35 bar



Environmentally friendly alternative for spin-in filtration

Lightweight, non-metallic element that can be incinerated

The 12S Series features a patented, re-usable coreless Ecoglass III element in a replaceable bowl for easy used element removal and disposal. Maximum pressure 35 bar and the Ecoglass element offers a low environmental impact in landfills.



Contact Information: Product Features:

Parker Hannifin
Hydraulic Filter Division Europe

European Product Information Centre
Freephone: 00800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES, FI, FR, IE, IT, PT, SE, SK, UK)
filtrationinfo@parker.com

www.parkerhfde.com

- 12S features a patented, re-usable coreless Ecoglass III element.
- Replaceable bowl design for easy element removal.
- Maximum pressure 35 bar.
- An eco filter solution for hydraulic systems.
- Full options available July 2010.

Coreless Spin-on Filters

12AS Series



The Smart Alternative to Spin-on Cans!

Features:

Parker engineers have developed an innovative alternative to the age old spin-on style can. This new design provides all of the benefits of high efficiency, long life Ecoglass III filtration, without the environmental impact.

The new environmentally-friendly 12AS hydraulic filters feature a reuseable bowl and a patented filter element constructed primarily of nylon and fiberglass. The element core is permanently attached as part of the filter bowl. When replaced, the element reduces costs, eliminates hot drain requirements, can be easily incinerated, and is better-suited for most landfills.

The 35 bar filter is rated up to 220 l/min, with premium Ecoglass III elements as standard offerings. The patented element design also prevents filter operation if the proper element is not in place.

Applications:

Mobile Ag
Mobile Construction
Material Handlers
Aerial Lifts
Pilot lines
Charge pump hydrostatic drives
Industrial power units
Machine tools

Feature	Advantage	Benefit
• 35 bar operating pressure	• Withstands pressure surges, allows application versatility.	• Broader applications compared to lower rated spin-on cans.
• Patented element	• Provides head-to-bowl seal. • Must be installed for operation. • Ensures original element must be used.	• Provides optimum leak-free performance. • Meets system cleanliness requirements.
• Coreless Ecoglass elements	• Lightweight, non-metallic. • Ease of service and disposal.	• Reduces disposal costs. • Can be incinerated. • Low environmental impact in landfills.
• Spin-on filter assembly w/re-usable bowl	• Improved, cost-effective design.	• Easy to maintain.

Specifications

Pressure Ratings:

Maximum Allowable
Operating Pressure (MAOP):
35 bar (500 psi)
Fatigue: 27.6 bar (400 psi)
1,000,000 cycles: 27.6 bar
Design Safety Factor: 2.5:1

Operating Temperatures:

Buna: -40°C to 107°C

Element Collapse Rating:

10.3 bar (150 psid)

Element Condition Indicators:

Gauge: 0-4.15 bar color coded
(For use in low pressure
applications only.)
Pressure Switch: normally open,
1.45 ± 2 bar, 5A @ 24 VDC
(For use in low pressure
applications only.)



Materials:

Head: die cast aluminium
Bypass valve: nylon with steel spring
Filter element: fibreglass and polyester
with nylon endcaps
Bowl: steel
Permanent core: steel

Weights (approximate):

12AS-2..... 1.4 kg (3lbs.)



12AS-2

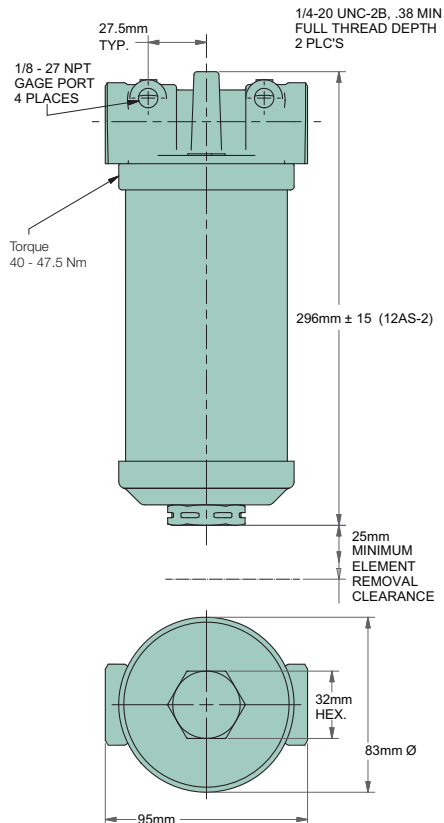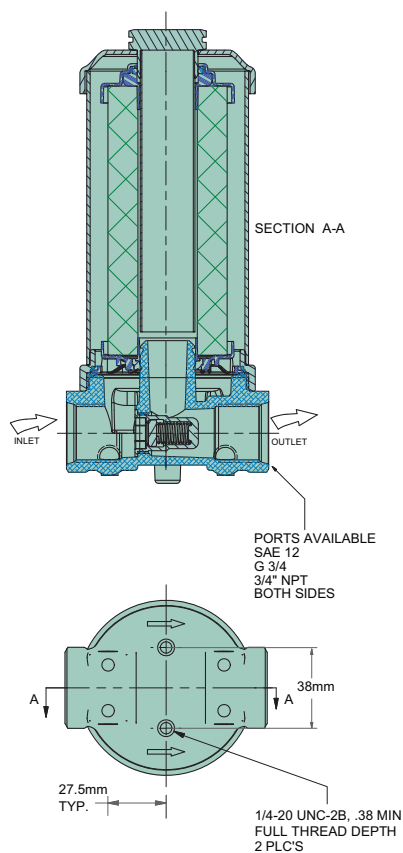

Coreless Spin-on Filters



12AS Series

12AS-2 Performance

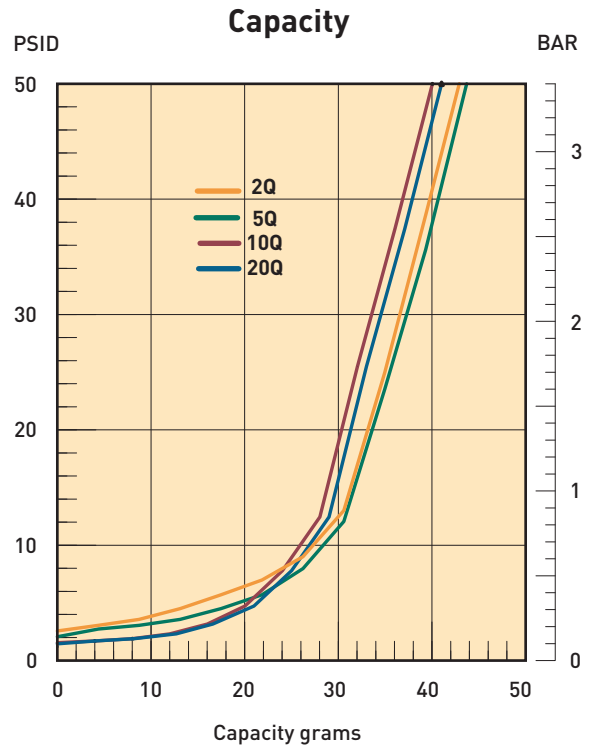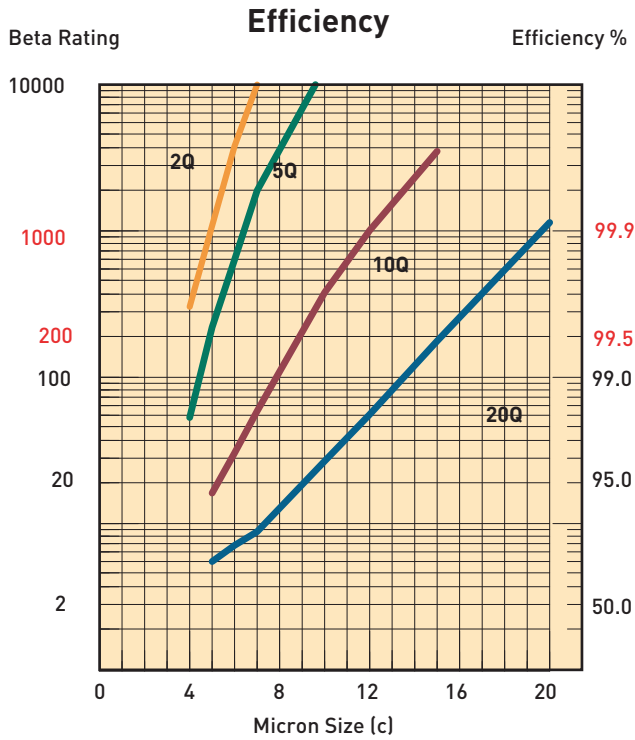

Results typical from Multi-pass tests run per test standard ISO 16889 @ 15 gpm to 50 psid terminal - 10 mg/L BUGL
Refer to Appendix for relationship to test standard ISO 4572.

Flow vs Pressure Loss

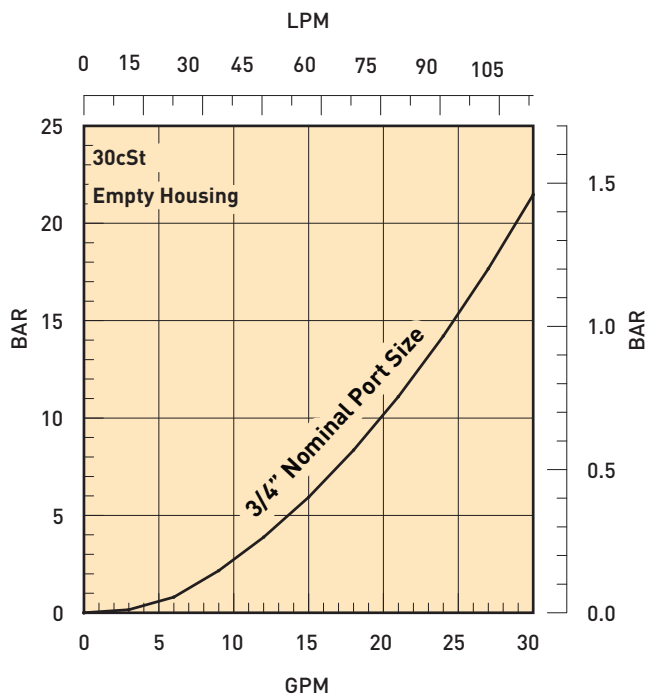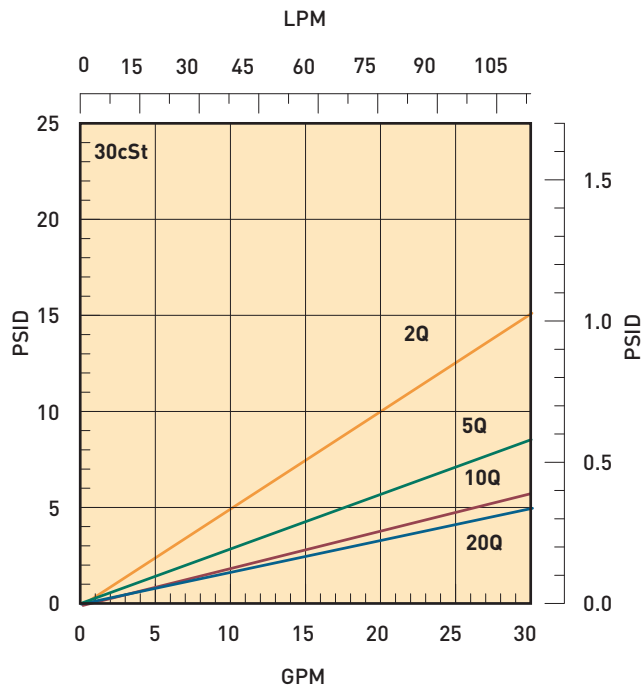

Coreless Spin-on Filters

12AS Series

Service Instructions 12AS

Filter Service

Filter element should be replaced as indicated by filter indicator gauge, or at specified service intervals recommended by the OEM.

Replacement element procedure

- A. Shut down system and release pressure in the filter line.
- B. Loosen bowl and remove rotating counter clockwise.
- C. Remove dirty element from filter head and discard.
- D. Lubricate element seals on clean element and install on filter head element locator.
- E. Install reuseable bowl onto element and filter head. Tighten to specified torque.




Parts List

Index		12AS
1	Head	
	SAE-12	937600
	3/4" NPT	937612
	G3/4" BSPP	940898
	SAE-20	N/A
	1 1/4" NPT	N/A
2	Bypass	
	1.72 bar assembly	928979
	3.4 bar assembly	928981
3	Element	
	Single	
	02QE	N/A
	05QE	N/A
	10QE	N/A
	20QE	N/A
	Double	
	02QE	940765Q
	05QE	940764Q
	10QE	940763Q
	20QE	940762Q
4	Bowl	
	Single	N/A
	Double	937599
5	Gauge	
	3.4 bar bypass	936628
	1.72 bar bypass	936912
6	Pressure Switch	
	3.4 bar bypass	934617
	1.72 bar bypass	926923



Indicator Gauge (1.72 bar)

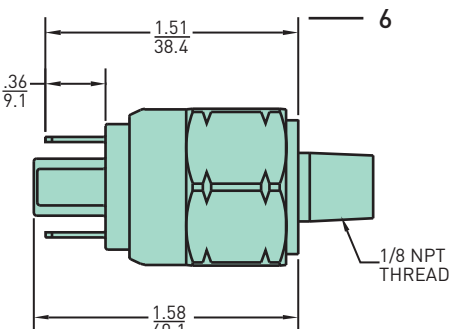

Pressure Switch

Linear Measure = $\frac{\text{inches}}{\text{mm}}$

Coreless Spin-on Filters

12AS Series

How To Order

Select the desired symbol (in the correct position) to construct a model code.

Example:

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7	BOX 8
12AS	2	10QE	B	P	G	S12	1

BOX 1: Basic Assembly	
Symbol	Description
12AS	Coreless Spin-On, 75 l/min nominal

BOX 6: Bypass	
Symbol	Description
G	1.7 bar (25 PSID)
K	3.5 bar (50 PSID)

BOX 2: Length	
Symbol	Description
2	Double

BOX 7: Ports	
Symbol	Description
S12	SAE-12 integral threads*
N12	3/4" NPT integral threads
G12	G3/4" BSPP (ISO 220) integral threads

BOX 3: Element Media	
Symbol	Description
02QE	Ecoglass III, 2µm
05QE	Ecoglass III, 5µm
10QE	Ecoglass III, 10µm
20QE	Ecoglass III, 20µm

BOX 4: Seals	
Symbol	Description
B	Nitrile (NBR)
Consult Factory for additional seal options	

*Porting recommended for best delivery.

Symbol	Description
1	No options

BOX 5: Indicator	
Symbol	Description
P	Gauge Ports (4) Plugged

Replacement Elements (Ecoglass)

Media	Filter Model - Nitrile seals	
	12AS-2	50AS-1
02QE	940765Q	940616Q
05QE	940764Q	940617Q
10QE	940763Q	940618Q
20QE	940762Q	940619Q

Accessories

Part Number	Description
936912	Pressure gauge, 2" 0-4.7 bar (1.7 bar bypass)
936628	Pressure gauge, 0-6.9 bar (3.5 bar bypass)
926923	Pressure switch, 1.3 ± 0.1 bar 5A @ 24 VDC (1.7 bar bypass)
934617	Pressure switch, 3 ± 0.2 bar (3.5 bar bypass)

Accessories for use in low pressure application only.