



مهره بره‌ای هیدرولیک

HYDRAULIC NUT CUTTERS



Hydraulic Nut Cutters provides an effective and safe removal of damaged or rusted nuts that can not be removed by conventional techniques.

Do not damage the surface of a threaded bolt or stud.

Cylinder Nut Cutters is at an angle to the working surface, which makes it possible to work not only with bolts on the flanges, but also at a large distance from the edge on the flat surface.

Unilateral action, spring return blade.


Heavy models are equipped with handles for carrying and installing the operating position.

Replacement blade included.

Nuts Nut Cutters cutting technology ensures that no parts of the nuts and flying sparks, and does not damage the threads on the bolt or stud.

The cylinder is at an angle to the working plane, which makes it possible to work not only with bolts on the flanges, but also at a large distance from the edge on the flat surface



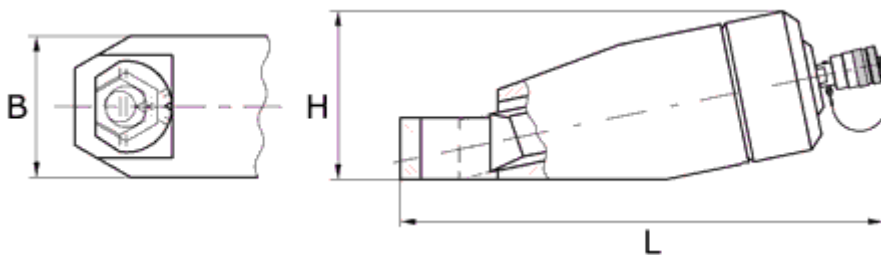

Reference	The effort, tf	Size turnkey mm	Thread mm	The course of the cut, mm
GR-1924	10	19..24	M12 ... M16	15
GR-2432	13.7	24 ... 32	M16 ... M24	22
GR-3241	20	32 ... 41	M22 ... M27	23
GR-4150	23.2	41 ... 50	M27 ... M36	23
GR-5060	35.2	50 ... 60	M36 ... M42	27

